


FED. SUP CLASS
4730User activities:
Army - EL, MIReview activities:
Army - AV, WG, MU

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all engineering and design applications and for repetitive use shall be made from this document.

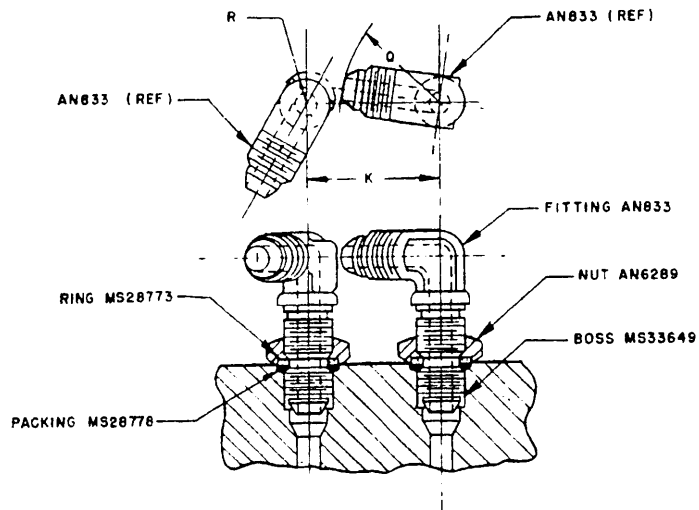

DASH NO REF	R	Q	K (MIN.) (1)
2	.181	.828	1.040
3	.225	.893	1.149
4	.252	.957	1.240
5	.296	1.022	1.349
6	.322	1.089	1.442
8	.434	1.360	1.825
10	.489	1.569	2.089
12	.586	1.795	2.412
16	.727	1.973	2.731
20	.894	2.229	3.154
24	1.034	2.426	3.493
28	1.243	2.720	3.994
32	1.375	2.905	4.311

(1) DIMENSION K = R + Q + .031

WHEN DIFFERENT SIZE BOSSES ARE USED, MAINTAIN MINIMUM SPACING EQUAL TO R OF SMALL FITTING PLUS Q OF LARGE FITTING PLUS .031
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

P.A. Air Force - II

Other Cast

Navy - AS
Army - AV

TITLE

BOSS SPACING - HYDRAULIC DESIGN STANDARD FOR

PROCUREMENT SPECIFICATION

SUPERSEDES AND10074

MILITARY STANDARD

MS21343

SHEET 1 OF 1

DD FORM 672-1
1 SEP 57

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

APPROVED 16 Aug 71 REVISED

