


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DISC SPECIFIED IN THE SOLICITATION MIL-S-8834

THIS SPECIFICATION IS APPROVED FOR USE BY
Department of Defense

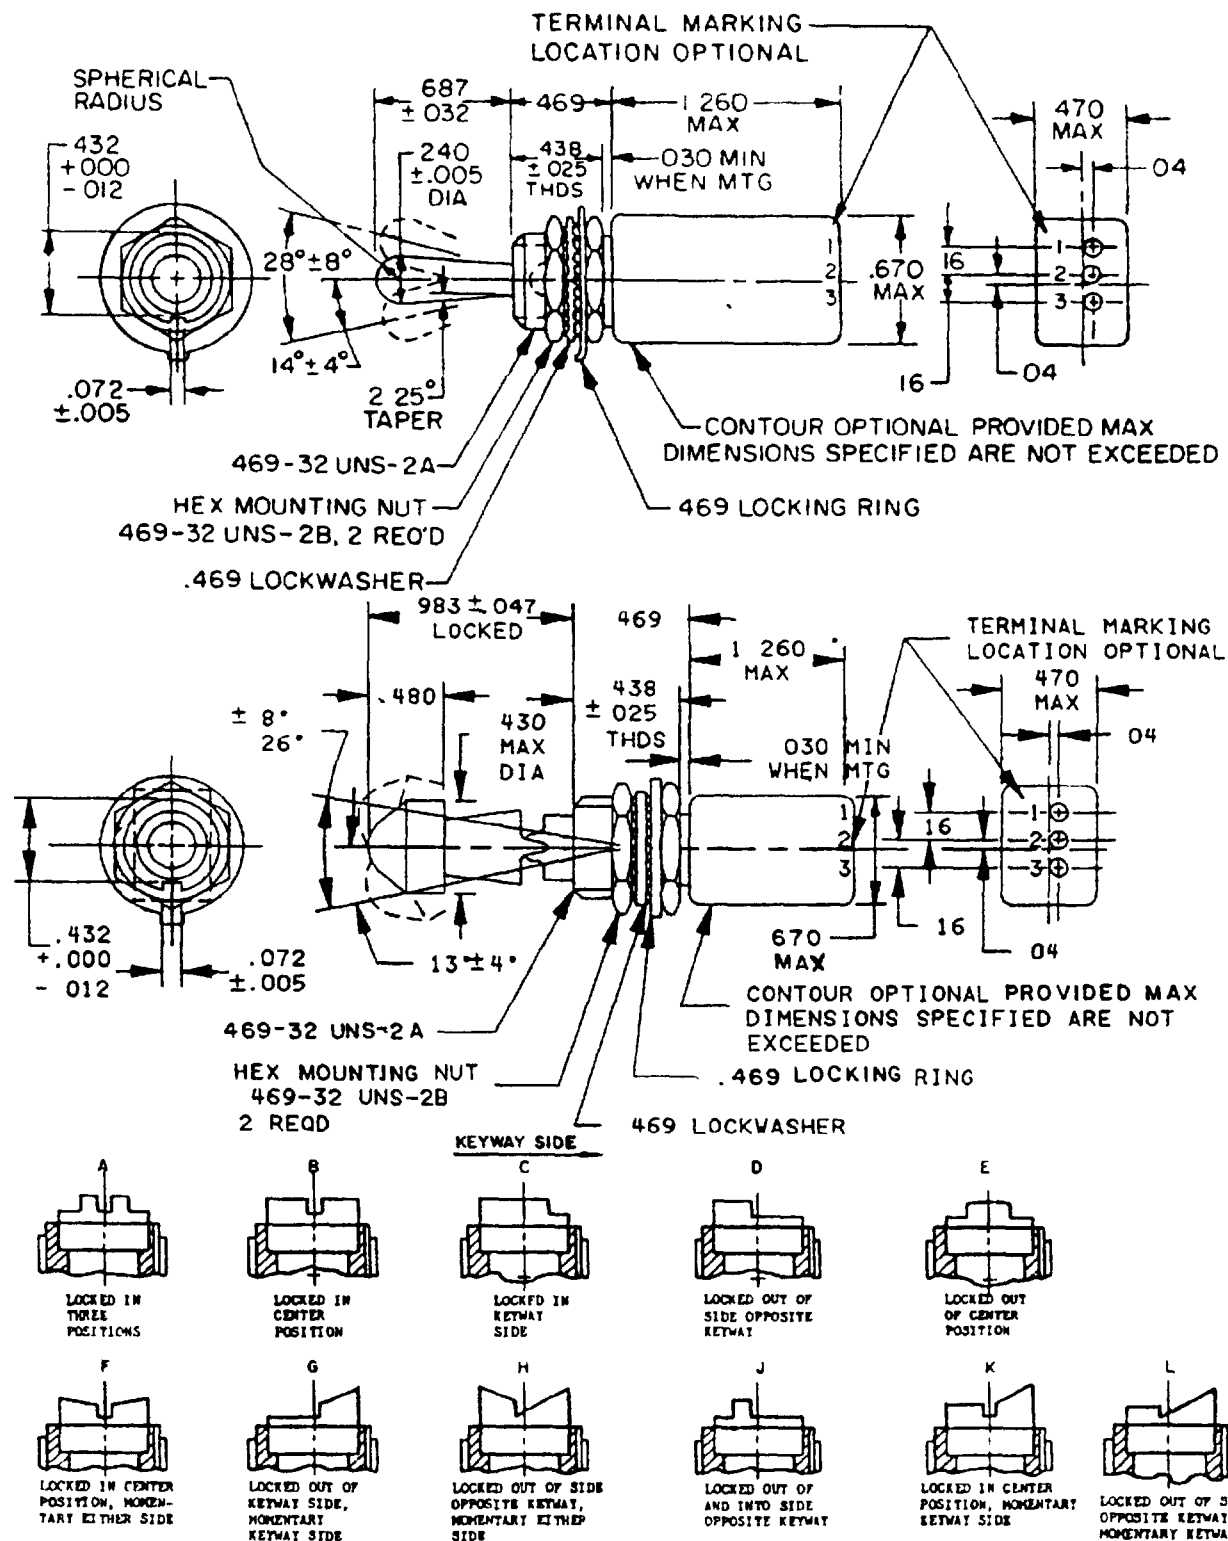

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY ER NAVY-AS
AIR FORCE DLA-
Army-ER, AR, MI Navy-AS, EC
REVIEW Air Force-99 (E)
USER
PROJECT NUMBER 5930-1454-10

MILITARY SPECIFICATION SHEET
TITLE SWITCH, TOGGLE, POSITIVE
BREAK, LEVER LOCK AND TOGGLE, MIN-
IATURE TOGGLE SEALED, INTEGRATED
WIRE TERMINALS, SINGLE POLE, 469
MOUNTING BUSHING

SPECIFICATION SHEET NUMBER
MS21346E 4 Sep 1991
SUPERSEDING
MS21346D 20 July 1984
AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A, Approved for public release, distribution is unlimited

Page 1 of 4

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-S-8834

THIS SPECIFICATION IS APPROVED FOR USE BY all departments and agencies of the
Department of Defense

Form Approved
OMB No 0704-0188

DETAIL REQUIREMENTS: 1/2/

MS DASH NO	LOCKING COMB.	CIRCUIT MADE BETWEEN TERMINALS AS INDICATED WITH THE TOGGLE LEVER IN THESE POSITIONS: 3/				CURRENT CAPACITY IN AMPERES				LIFE LOW CURRENT LEVEL - SWITCHING 5 mv	
		OPPOSITE KEYWAY SIDE 5/	CENTER POSITIONS	KEYWAY SIDE 5/	RESISTIVE LOAD		INDUCTIVE LOAD				
					28 VOLTS DC	115 VOLTS 60 HERTZ AC	28 VOLTS DC	115 VOLTS 60 HERTZ AC			
-211	A, B, C, D, E		OFF	ON 1-2						5/ 25 μ A	
-221	C, E	ON 2-3	NONE	OFF							
-231				ON 1-2							
-241	J, B		OFF	NONE	5	2	3	4/ 1	1		2
-271	F, H	MOM-ON 2-3	OFF	MOM-ON 1-2							
-281	K	NONE									
-311	G, K, L	ON 2-3									
-321	L	NONE	ON 2-3								

NOTES:

- 1/ For lever lock, part number shall consist of MS number, locking combination letter and dash number; example part number. MS21346-B211-Toggle sealed, on-off-on, Locked in center position.
- 2/ Without lever lock, part number shall consist of MS number and dash number. Example part number: MS21346-211-Toggle sealed on-off-on.
- 3/ Direction of movement of internal mechanism is opposite to the direction of the toggle movement.
- 4/ With time constant of .020 \pm .002 seconds.
- 5/ Contact resistance not to exceed 50 ohms during life, low current level switching
- 6/ Nonfunctional terminals shall not be supplied.
- 7/ Dielectric withstanding voltage: 1200 V rms at sea level (center on circuits).
- 8/ Delayed action of the switch toggle lever may cause circuit to close on open before snap action mechanism trips.

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY ER NAVY AS
AIR FORCE DLA
Army-ER, AR, MI Navy-AS, EC
REVIEW Air Force-99 (E)
USER
PROJECT NUMBER 5930-1454-10

MILITARY SPECIFICATION SHEET
TITLE SWITCH, TOGGLE, POSITIVE
BREAK, LEVER LOCK AND TOGGLE, MINI-
ATURE TOGGLE SEALED, INTEGRATED
WIRE TERMINALS, SINGLE POLE, 469
MOUNTING BUSHING

SPECIFICATION SHEET NUMBER

MS21346E

SUPERSEDING
MS21346D

20 July 1984

AMSC N/A

FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Page 2 of 4

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THE "SUE OF THE" JOISS SPECIFIED IN THE SOLICITATION MIL-S-8834

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPT. DIRECT, AND AGENCIES OF THE Department of Defense

Form Approved
OMB No 0704-0188

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	0.05	.024	0.61	.047	1.19	.364	9.52	.480	12.19
.003	0.08	.025	0.64	.052	1.32	.430	10.92	.572	14.53
.005	0.13	.030	0.76	.072	1.83	.432	10.97	.670	17.02
.010	0.25	.032	0.81	.160	4.06	.438	11.13	.706	17.93
.012	0.30	.04	1.02	.169	4.29	.469	11.91	.983	24.97
.016	0.41	.045	1.14	.338	8.59	.470	11.94	1.260	32.00

NOTES

- 1 Dimensions are in inches.
- 2 Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.010 on decimals and $\pm 5^\circ$ on angles.
4. For hardware detail specifications see appendix of MIL-S-8834.
5. For design feature purposes, this standard takes precedence over procurement documents reference herein.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.
- 7 Toggle seal test: Method II.
- 8 Unlocking force: 4 ± 1 pound.
- 9 Configuration of switch case housing, terminals and barriers: Design optional providing maximum dimensions specified are not exceeded.
- 10 Altitude 50,000 feet.
- 11 115 V ac 60 hertz electrical endurance tests are to be performed at room temperature and pressure.
12. Terminals shall adequately accept a wire contact within dimensional limits of M39029/1-101.
- 13 The sealing grommet shall seal on smooth wire insulations of .040 (1.02 mm) to .083 (2.11 mm) diameter.
14. Plug, grommet sealing, electrical connector per MS27488-20.
15. Tool contact, insertion-extraction, electrical connector per M81969/14-10.
16. The terminal sealing grommet shall be color coded red to indicate contact size.
17. Maximum weight for lever lock, .069 pound (31.5 grams).
18. Maximum weight for switch without lever lock, .053 pound (24 grams).

PREPARING ACTIVITY Air Force - 85 CUSTODIANS ARMY ER NAVY- AS AIR FORCE DLA Army-ER, AR, MI Navy-AS, EC REVIEW Air Force-99 (E) USER PROJECT NUMBER 5930-1454-10	MILITARY SPECIFICATION SHEET TITLE SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK AND TOGGLE, MIN- IATURE TOGGLE SEALED, INTEGRATED WIRE TERMINALS, SINGLE POLE, 469 MOUNTING BUSHING	SPECIFICATION SHEET NUMBER MS21346E SUPERSEDING MS21346D 20 July 1984 AMSC N/A FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited		Page 3 of 4

TEST REQUIREMENTS

Qualification and group B tests are to be performed in accordance with MIL-S-8834 except

During all tests switches are to be fully wired with appropriate wire and terminal contacts.

Contact voltage drop The contact voltage drop with two terminals and the switch contact in series shall not exceed 8 millivolts. This measurement shall be made from one wire contact through the switch contacts to the other wire contact with .1 ampere at a voltage of 2-4 volts DC.

Fluid immersion Two additional qualification of group B switches, fully wired, shall be subjected to three exposure cycles in accordance with a and b.

- a. The terminal end of the switch shall be immersed to a depth of 3/8 inch measured from the exposed face of the sealing grommet in each of the following fluids for 2 +1/2, -0 minutes with a maximum of two minutes between immersions. After each immersion the excess liquid is to be blown off the switch external surfaces with an air jet.
 - (1) MIL-T-5624 - Turbine fuel, aviation, grade JP-4 or JP-5.
 - (E) (2) Skydrol 500A - Federal stock number 9150-00-857-9069.
 - (E) (3) Coolanol - Federal stock number 9150-00-257-1298, (coolanol is a Monsanto Company's registered trademark)
 - (4) MIL-E-9500 - Ethylene glycol, technical uninhibited.
 - (5) MIL-L-7808 - Lubricating oil, aircraft turbine engine synthetic base.
- b. Exposure to ambient air for 24 ±2 hours.
- c. At the end of the third cycle, the insulation resistance shall be measured and the switches shall be inspected for cracking and loosening of bonds and seams. When switches are tested as specified the insulation resistance shall not be less than 1000 megohms and there shall be no evidence of cracking and loosening of bonds and seams.
- d. Toggle seal test Method II.

PREPARING ACTIVITY Air Force - 85 CUSTODIANS ARMY ER NAVY AS AIR FORCE DLA Army-ER, AR, MI Navy-AS, EC REVIEW Air Force-99 (E) USER PROJECT NUMBER 5930-1454-10	MILITARY SPECIFICATION SHEET TITLE SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK AND TOGGLE, MIN- IATURE TOGGLE SEALED, INTEGRATED WIRE TERMINALS, SINGLE POLE, 469 MOUNTING BUSHING	SPECIFICATION SHEET NUMBER MS21346E SUPERSUCCESSING MS21346D 20 July 1984 AMSC N/A FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited		Page 4 of 4