
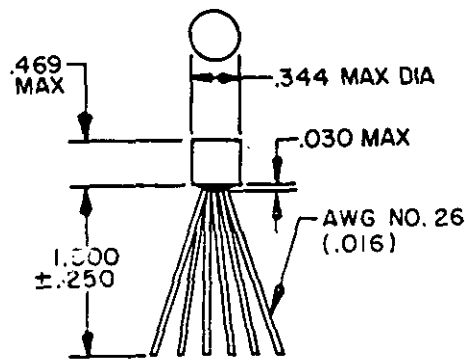


FED. SUP CLASS
5950

INCHES	MM
.016	.41
.030	.76
.250	6.35
.344	8.74
.469	11.91
1.500	38.10

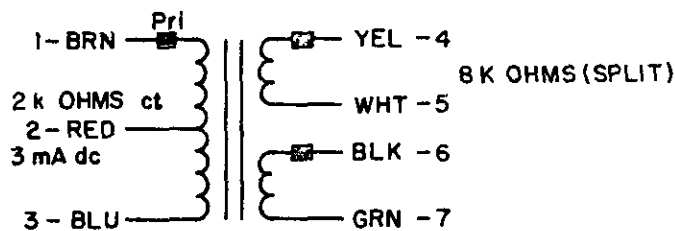

ALTITUDE: 150,000 FT
 WORKING VOLTAGE: 49 V PEAK
 FREQUENCY RANGE: 300 Hz TO 10 kHz
 POWER LEVEL: 100 mW
 BRN-RED-BLU = 2 k OHMS ct
 YEL-WHT-BLK-GRN = 8 k OHMS (SPLIT)

CIRCUIT DIAGRAM AND MARKING

ⓑ CANCELED AFTER 14 AUGUST 1979
 USE MIL-T-27/172-28

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The number of terminals shall be as shown in schematic.
4. Referenced document shall be of the issue in effect on date of invitation for bids.
5. This standard takes precedence over document referenced herein.
6. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.
7. The elevated temperature for thermal shock (step 3, method 107C, MIL-STD-202) shall be 85°C.

ⓑ DENOTES CHANGES

P.A. Air Force-85 Other Cust	International Interest	TITLE ⓑ TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TYPE TF5R21Z	MILITARY STANDARD MS 21375(USAF)
Procurement Specification MIL-T-27		SUPERSEDES:	PAGE 1 OF 1

DD FORM 672 (LIMITED COORDINATION)
 1 SEP 63

5950-F188-2

Review Activity:
 AF - 99

This military standard has been approved by the Directorate of Electronic Support (AFALD/PTS), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

APPROVED 15 DEC 1972 REVISED ⓐ 1 JUN 1973 ⓑ 14 AUG 79