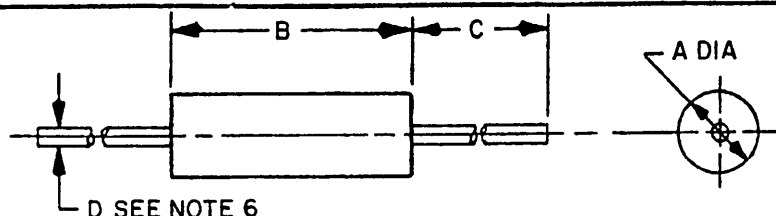


User activities:

Review activities:

This Military Standard is approved for use by AFALD/PTEs (Preparing Activity), (Department of the AF) and is available for use by all Departments and Agencies of the Department of Defense.

FED. SUP CLASS  
5950

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.085 (2.16)	.105 (2.67)
B	.240 (6.10)	.260 (6.60)
C	1.250 (31.75)	1.626 (41.30)
D	.0185 (.47)	.0215 (.55)

B

RATINGS	
Style	LT4
Grade	1
Class	B
Temperature rise	35°C
Ambient temperature	90°C
Operating temperature	-55° to +125°C
Dielectric withstanding voltage (sea level)	300 volts rms for a minimum of 60 sec.
Dielectric withstanding voltage (reduced barometric pressure)	100 volts rms for a minimum of 60 sec.
Terminal pull	3 pounds
Altitude	70,000 feet
Percent coupling	5 percent max.
Weight	.15 grams max.

B

B

B REINSTATED FOR DESIGN AFTER 10 MAY 83

Electrical characteristics (initial)							
Dash no.	Type designation	Inductance ±10%	Q min	Test frequency	Self-resonant frequency min	DC resistance at 25°C max	Max rated DC current
		$\mu$ h		MHz	MHz	ohms	mA
-1	LT4K	.10	52	25	500	.060	1500
-2	LT4K	.12	52	25	480	.070	1400
-3	LT4K	.15	52	25	450	.080	1300
-4	LT4K	.18	55	25	430	.090	1200
-5	LT4K	.22	55	25	390	.11	1100
-6	LT4K	.27	55	25	340	.12	1000

B DENOTES CHANGES

P.A AF 85

International  
Interest

Other Cust

TITLE COILS, RADIO FREQUENCY, MOLDED,  
FIXED, MICRO-MINIATURE, MAGNETICALLY  
SHIELDED (IRON CORE - IRON SLEEVE)  
TYPE LT4K

MILITARY STANDARD

MS21396 (85)

Procurement Specification  
MIL-C-15305

SUPERSEDES:

PAGE 1 OF 3

This military standard is approved for use by AFALD/PTES (Preparing Activity), (Department of the AF) and is available for use by all Departments and Agencies of the Department of Defense.

Review activities:

User activities:

Ⓑ

FED. SUP CLASS  
5950

Electrical characteristics (initial) continued

Dash no.	Type designation	Inductance ±10%	Q min	Test frequency	Self-resonant frequency min	DC resistance at 25°C max	Max rated DC current
		<u>μh</u>		<u>MHz</u>	<u>MHz</u>	<u>ohms</u>	<u>mA</u>
-7	LT4K	.33	52	25	310	.14	950
-8	LT4K	.39	52	25	280	.16	900
-9	LT4K	.47	50	25	250	.20	800
-10	LT4K	.56	50	25	220	.25	750
-11	LT4K	.68	48	25	200	.27	700
-12	LT4K	.82	48	25	180	.36	600
-13	LT4K	1.0	45	25	165	.40	525
-14	LT4K	1.2	45	7.9	150	.70	425
-15	LT4K	1.5	45	7.9	130	.80	400
-16	LT4K	1.8	45	7.9	120	.90	350
-17	LT4K	2.2	45	7.9	110	1.3	320
-18	LT4K	2.7	45	7.9	100	1.8	275
-19	LT4K	3.3	42	7.9	70	1.7	290
-20	LT4K	3.9	45	7.9	65	1.8	275
-21	LT4K	4.7	45	7.9	58	2.6	225
-22	LT4K	5.6	45	7.9	54	2.9	210
-23	LT4K	6.8	45	7.9	50	3.3	200
-24	LT4K	8.2	45	7.9	48	4.5	170
-25	LT4K	10	45	7.9	45	4.8	165

REVISED Ⓐ FOR CHANGES SEE PAGE 1 Ⓑ FOR CHANGES SEE PAGES 1 THRU 3

APPROVED 3 OCT 1973

P.A AF 85

Other Cust

International  
interest

TITLE COILS, RADIO FREQUENCY, MOLDED,  
FIXED, MICRO-MINIATURE, MAGNETICALLY  
SHIELDED (IRON CORE - IRON SLEEVE)  
TYPE LT4K

MILITARY STANDARD

MS21396 (85)

Procurement Specification  
MIL-C-15305

SUPERSEDES:

PAGE 2 OF 3

User activities:

Review activities:

## Electrical characteristics (Final)

Inspection Group	Allowable variation from initial measurement		Allowable % from specified minimum value in Electrical Characteristics (initial) table	
	Inductance	DC resistance	Self resonant frequency	Q
	Percent			
Qualification Inspection				
Group II	± 5	----	----	-10
Group III	± 5	± (3% + .001 ohm)	-8	-10
Group IV	± 5	± (2% + .001 ohm)	-5	-10
Quality Conformance Inspection				
Group C				
Subgroup I	± 5	----	----	-10
Subgroup II	± 5	± (2% + .001 ohm)	-5	-10
Subgroup III	± 5	± (3% + .001 ohm)	-5	-10

## NOTES:

- Barometric pressure test (test condition C) is applicable.
- Shock, specified pulse, method 213, test condition I, is applicable.
- These coils are intended to be supported by their leads.
- After the overload test is performed, a period of 24 hours shall elapse prior to taking electrical characteristics (final) measurements.
- DC resistance shall be the last measurement taken in the electrical characteristics test sequence.
- Tinned copper wire lead AWG 24.
- Dimensions are in inches.
- Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
- Referenced document shall be the issue in effect on date of invitation for bid.
- This standard takes precedence over the procurement specification referenced herein.
- The dash number added to the MS military standard number constitutes the MS part number, for example, MS21396-1.

This Military Standard is approved for use by AFALD/PTEs (Preparing Activity), (Department of the AF) and is available for use by all Departments and Agencies of the Department of Defense.

P.A AF 85	International Interest	TITLE COILS, RADIO FREQUENCY, MOLDED, FIXED, MICRO-MINIATURE, MAGNETICALLY SHIELDED (IRON CORE - IRON SLEEVE) TYPE LT4K	MILITARY STANDARD
Other Cust			MS21396 (85)
Procurement Specification MIL-C-15305	SUPERSEDES:		PAGE 3 OF 3

