
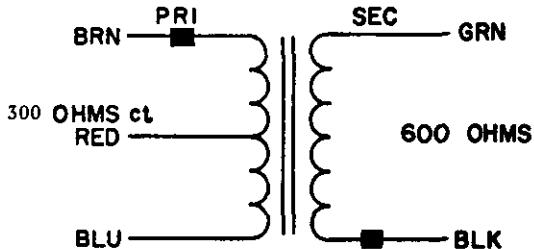


FED. SUP CLASS
5950Review Activity:
AF - 99

This military standard has been approved by the Directorate of Electronic Support (AFALD/PTS), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

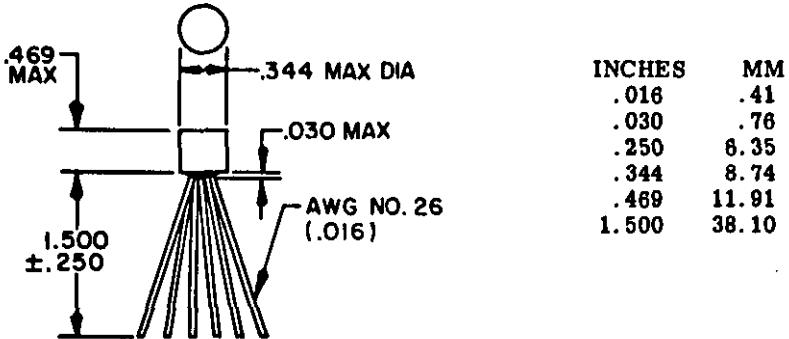

WORKING VOLTAGE: 49 V PEAK
 FREQUENCY RANGE: 300 Hz TO 20 kHz
 POWER LEVEL: 600 mW
 BRN - RED - BLU = 300 OHMS ct
 GRN - BLK = 600 OHMS

CIRCUIT DIAGRAM AND MARKING

CANCELED AFTER 14 AUGUST 1979 (A)
 USE MIL-T-27/172-05

NOTES:

- Dimensions are in inches.
- Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
- The number of terminals shall be as shown in schematic.
- Referenced document shall be of the issue in effect on date of invitation for bids.
- This standard takes precedence over document referenced herein.
- For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.
- The elevated temperature for thermal shock (step 3, method 107C, MIL-STD-202) shall be 85°C.

(A) DENOTES CHANGES

P.A. AF-85 Other Cust	INTERNATIONAL INTEREST	TITLE TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TYPE TF5R21ZZ	MILITARY STANDARD MS 21409 (USAF)
Procurement Specifications MIL-T-27	SUPERSEDES:		PAGE 1 OF 1