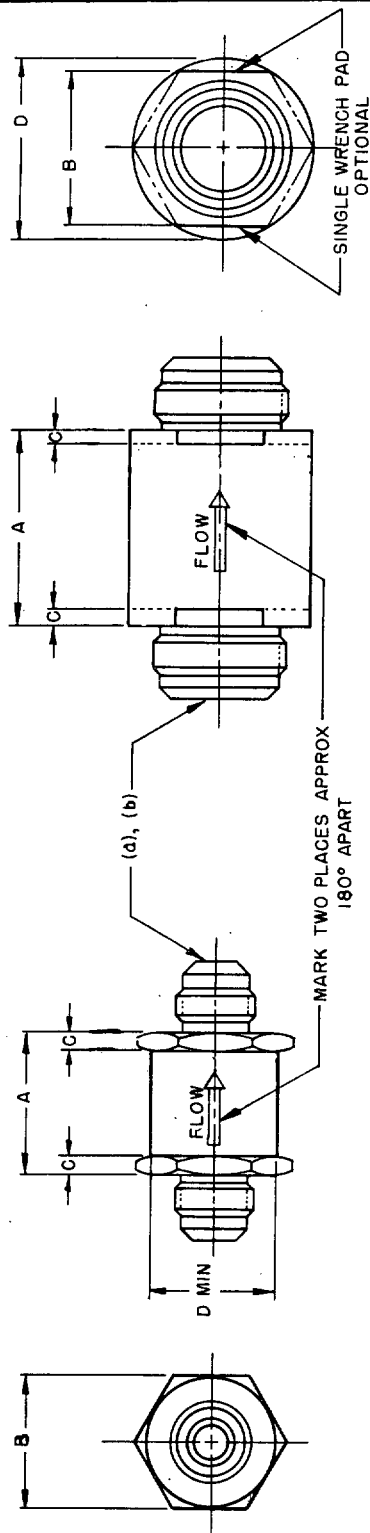


FED. SUP CLASS
2915

DASH NO. SIZE	TUBING O. D. (NOMINAL)	(A) A ±.030	(B) B ±.015	C MIN	D DIA MAX
-4	.250	1.34	1.000	.215	1.005
-6	.375	1.50	1.062	.215	1.065
-8	.500	1.56	1.250	.265	1.255
-10	.625	1.56	1.250	.265	1.255
-12	.750	2.06	1.500	.265	1.505
-16	1.000	2.37	1.875	.275	1.875
-20	1.250	2.69	2.500	.325	2.505
-24	1.500	3.05	2.750	.395	2.755
-32	2.000	3.80	3.125	.395	3.500

- (a) STYLE 1 - BOTH ENDS IN ACCORDANCE WITH MS33056, STYLE E, EXCEPT HEX.
 (b) STYLE 2 - INLET END IN ACCORDANCE WITH MS33057, STYLE E, EXCEPT HEX, AND OUTER END SAME AS STYLE 1.
 (c) "B" SHALL FIT STANDARD WRENCH OPENING.

MATERIAL: SEE PROCUREMENT SPECIFICATION.
 FINISH: SEE PROCUREMENT SPECIFICATION.

REMOVE ALL BARRS AND BREAK SHARP EDGES .016 MAXIMUM.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED. TOLERANCES: DIMENSIONS ±.010.

PART NUMBER: PART NUMBER CONSISTS OF MS NUMBER PLUS DATE CLASS LETTER "A", "B", "C", OR "D".

(SEE MIL-A-7899) FOLLOWED BY THE STYLE NUMBER PLUS THE DASH SIZE NUMBER.

EXAMPLES: MS21430A-24, MS21430B-24, MS21430C-24.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
 REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INITIATIONS FOR BID.

REVIEWER ACTIVITIES
 Army - AV, ME, MI
 Navy - AS
 USAF - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense.
 Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. Air Force-II Other Cust Army - AV Navy - AS	INTERNATIONAL INTEREST	TITLE VALVE, CHECK, FUEL AND AIR, POPPET TYPE, ZERO, LEAK
PROCUREMENT SPECIFICATION MIL-V-7899		SUPERSEDES:

MILITARY STANDARD

MS21430

SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Proj. No. 2915-0094

APPROVED 10 Jan 77 REVISED A 6 Dec 77