


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

<p>STAKE HEAD OF SCREW IN TWO PLACES</p> <p>SPRING RETAINER</p> <p>SPRING, COMPRESSION</p> <p>IMPRESSION STAMP MANUFACTURERS TRADE MARK</p> <p>MS20222-1</p> <p>HOOK ASSEMBLY</p> <p>(C1) TIP OF THE GUARD SHALL BE ALIGNED WITH THE SLOT AT THE TIP OF THE HOOK WITHIN .030 INCHES.</p> <p>BALL</p> <p>IMPRESSION STAMP PART NUMBER 22018</p> <p>BUSHING, GUARD</p> <p>MS20427-F2-5 (SEE NOTE 10)</p> <p>SPRING, DOUBLE TORSION</p> <p>(C2) GUARD (GUARD SHALL MOVE FREELY)</p> <p>SPRING, SINGLE TORSION</p> <p>BALL DETENT; BALL SHALL EXERT PRESSURE ON INSIDE CIRCUMFERENCE OF .125 DIA HOLE OF LEVER ARM GRIP. THE PULL REQUIRED TO REMOVE THE LEVER ARM GRIP (WITHOUT LOAD) FROM THE BALL DETENT SHALL BE BETWEEN 4 POUNDS AND 9 POUNDS, APPLIED AT THE END OF THE GRIP. (M1)</p> <p>DIRECTION OF PULL TESTS (SEE NOTES 7 AND 8)</p> <p>GRIP</p> <p>BUSHING, LEVER ARM PIVOT</p> <p>MS20427-F2-10 (SEE NOTE 10)</p> <p>LEVER ASSEMBLY</p> <p>MS20427-F3-7 (SEE NOTE 10)</p> <p>(E) EJECTOR SNAP ASSEMBLY</p> <p>THE BAR WITH A 20 POUND WEIGHT APPLIED SHALL BE COMPLETELY EJECTED WHEN A MANUAL PULL (NOT EXCEEDING 15 POUNDS) IS APPLIED TO OPEN THE LEVER ARM TO FULL RELEASE POSITION. (C3)</p> <p>WITH LEADING EDGE OF LEVER ARM GRIP RESTING ON THE PROJECTING BALL, A LOAD OF 20 POUNDS MAX. SHALL BE APPLIED TO THE END OF THE LEVER ARM (INSIDE HOOK MOUTH). THE GRIP SHALL CLOSE AND LOCK OVER THE BALL DETENT. (M2)</p> <p>(C4) SNAP SHALL ACCEPT A 9/32 DIA TEST BAR</p> <p>RELEASE OF LEVER ARM FROM THIS POSITION SHALL CLOSE AND SEAT LEVER ARM GRIP OVER BALL DETENT. (M3)</p> <p>(C5) LEVER ARM SHALL ROTATE TO ITS FULLY REJECTED POSITION (AGAINST DOUBLE TORSION SPRING BUSHING) WITHOUT RESISTANCE FROM DOUBLE TORSION SPRING.</p> <p>(E) REVISED AND REDRAWN</p>		<p>FORM APPROVED OMB NO. 0704-0188</p>
<p>PREPARING ACTIVITY: NAVY-AS</p> <p>CUSTODIANS: ARMY-CL NAVY-AS AIR FORCE-11</p> <p>REVIEW: USER:</p> <p>PROJECT NUMBER: 1670-0818</p>	<p>MILITARY SPECIFICATION SHEET</p> <p>TITLE: SNAP, PARACHUTE HARNESS QUICK-FIT EJECTOR</p>	<p>SPECIFICATION SHEET NUMBER MS22018 REVISION E 30 SEP 93</p> <p>SUPERSEDING MS22018 REVISION D 13 SEP 91</p> <p>AMSC- N/A FSC: 1670</p>
<p>DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED</p>		<p>PAGE 1 OF 12</p>

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195

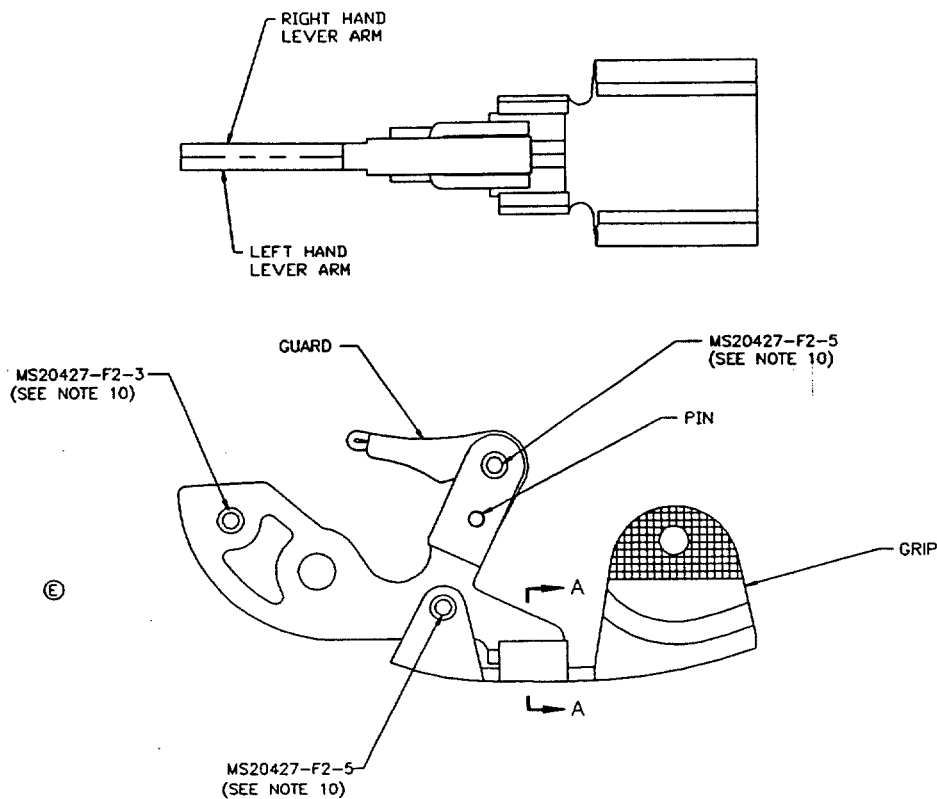

LEVER ASSEMBLY

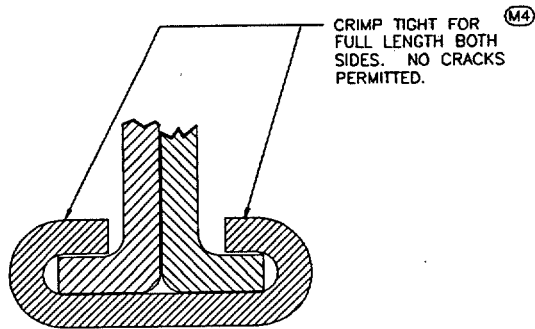

SECTION A-A

Ⓔ REVISED AND REDRAWN

THIS SPECIFICATION IS APPROVED FOR USE
BY ALL DEPARTMENTS AND AGENCIES OF THE
DEPARTMENT OF DEFENSE.

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-GL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818

MILITARY SPECIFICATION SHEET
TITLE: SNAP, PARACHUTE HARNESS
QUICK-FIT EJECTOR


SPECIFICATION SHEET NUMBER		
MS22018	REVISION E	30 SEP 93
SUPERSEDING		
MS22018	REVISION D	13 SEP 91
AMSC- N/A		FSC: 1670

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED

PAGE 2 OF 12

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195

THIS SPECIFICATION IS APPROVED FOR USE
BY ALL DEPARTMENTS AND AGENCIES OF THE
DEPARTMENT OF DEFENSE.

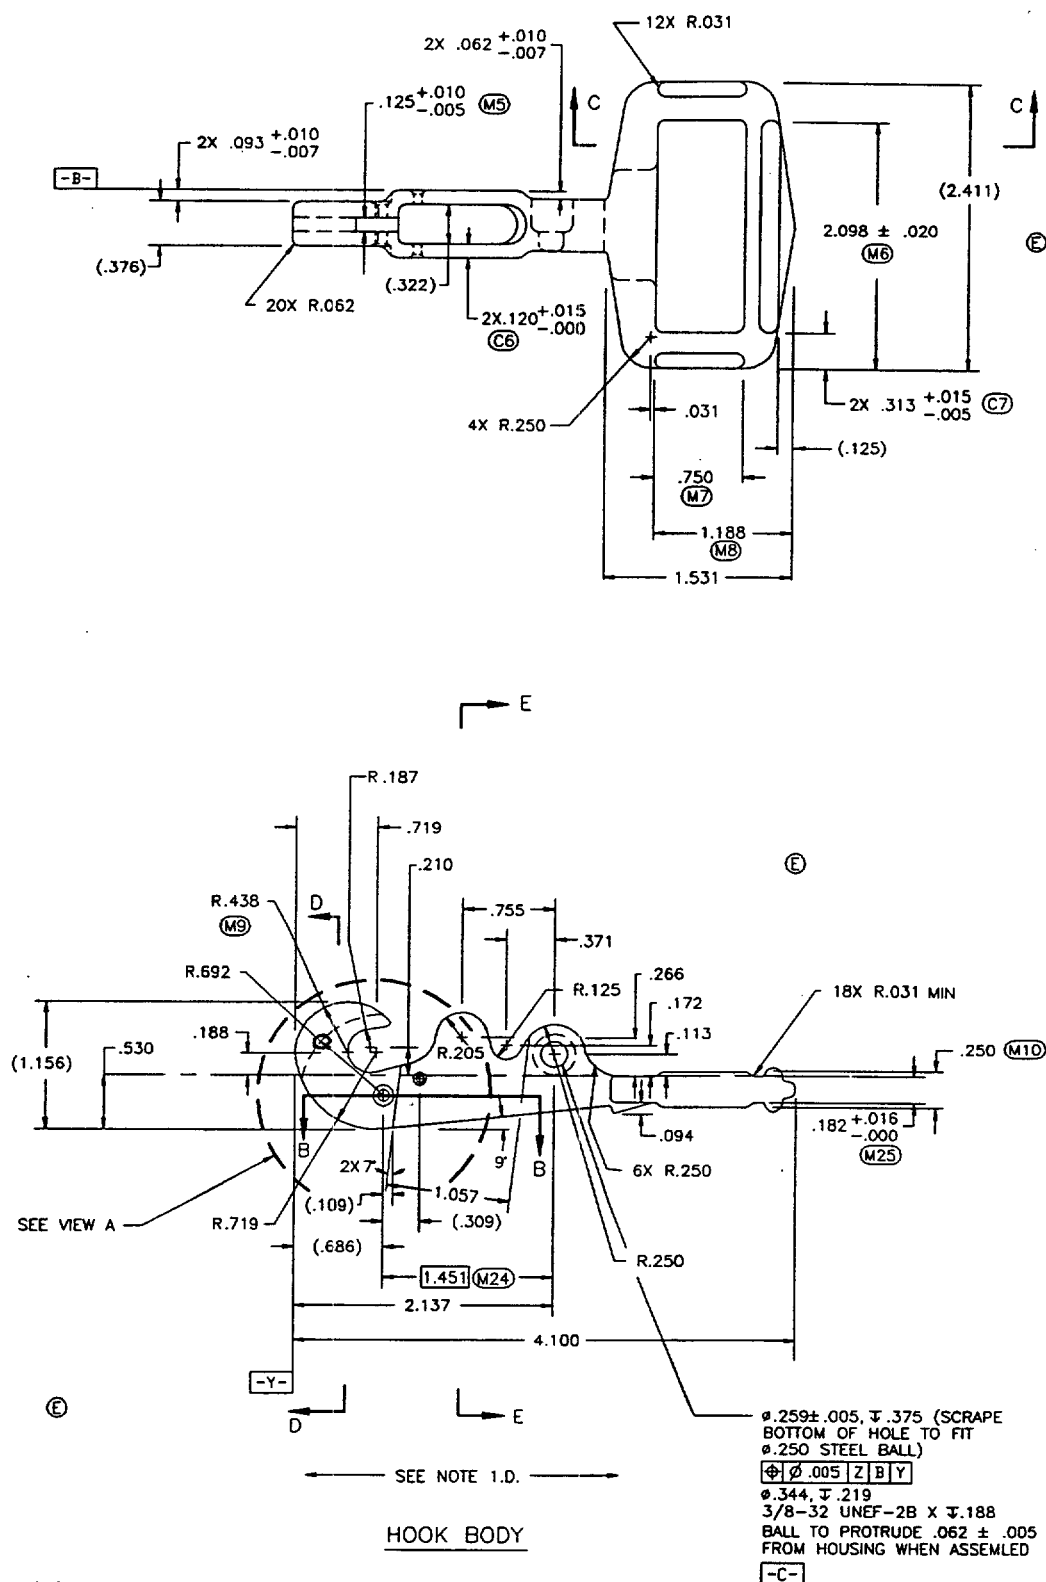

Ⓔ REVISED AND REDRAWN

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-GL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818

MILITARY SPECIFICATION SHEET

TITLE: SNAP, PARACHUTE HARNESS
QUICK-FIT EJECTOR


SPECIFICATION SHEET NUMBER		
MS22018	REVISION E	30 SEP 93
SUPERSEDING		
MS22018	REVISION D	13 SEP 91
AMSC- N/A		FSC: 1670

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

PAGE 3 OF 12

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195

THIS SPECIFICATION IS APPROVED FOR USE
BY ALL DEPARTMENTS AND AGENCIES OF THE
DEPARTMENT OF DEFENSE.

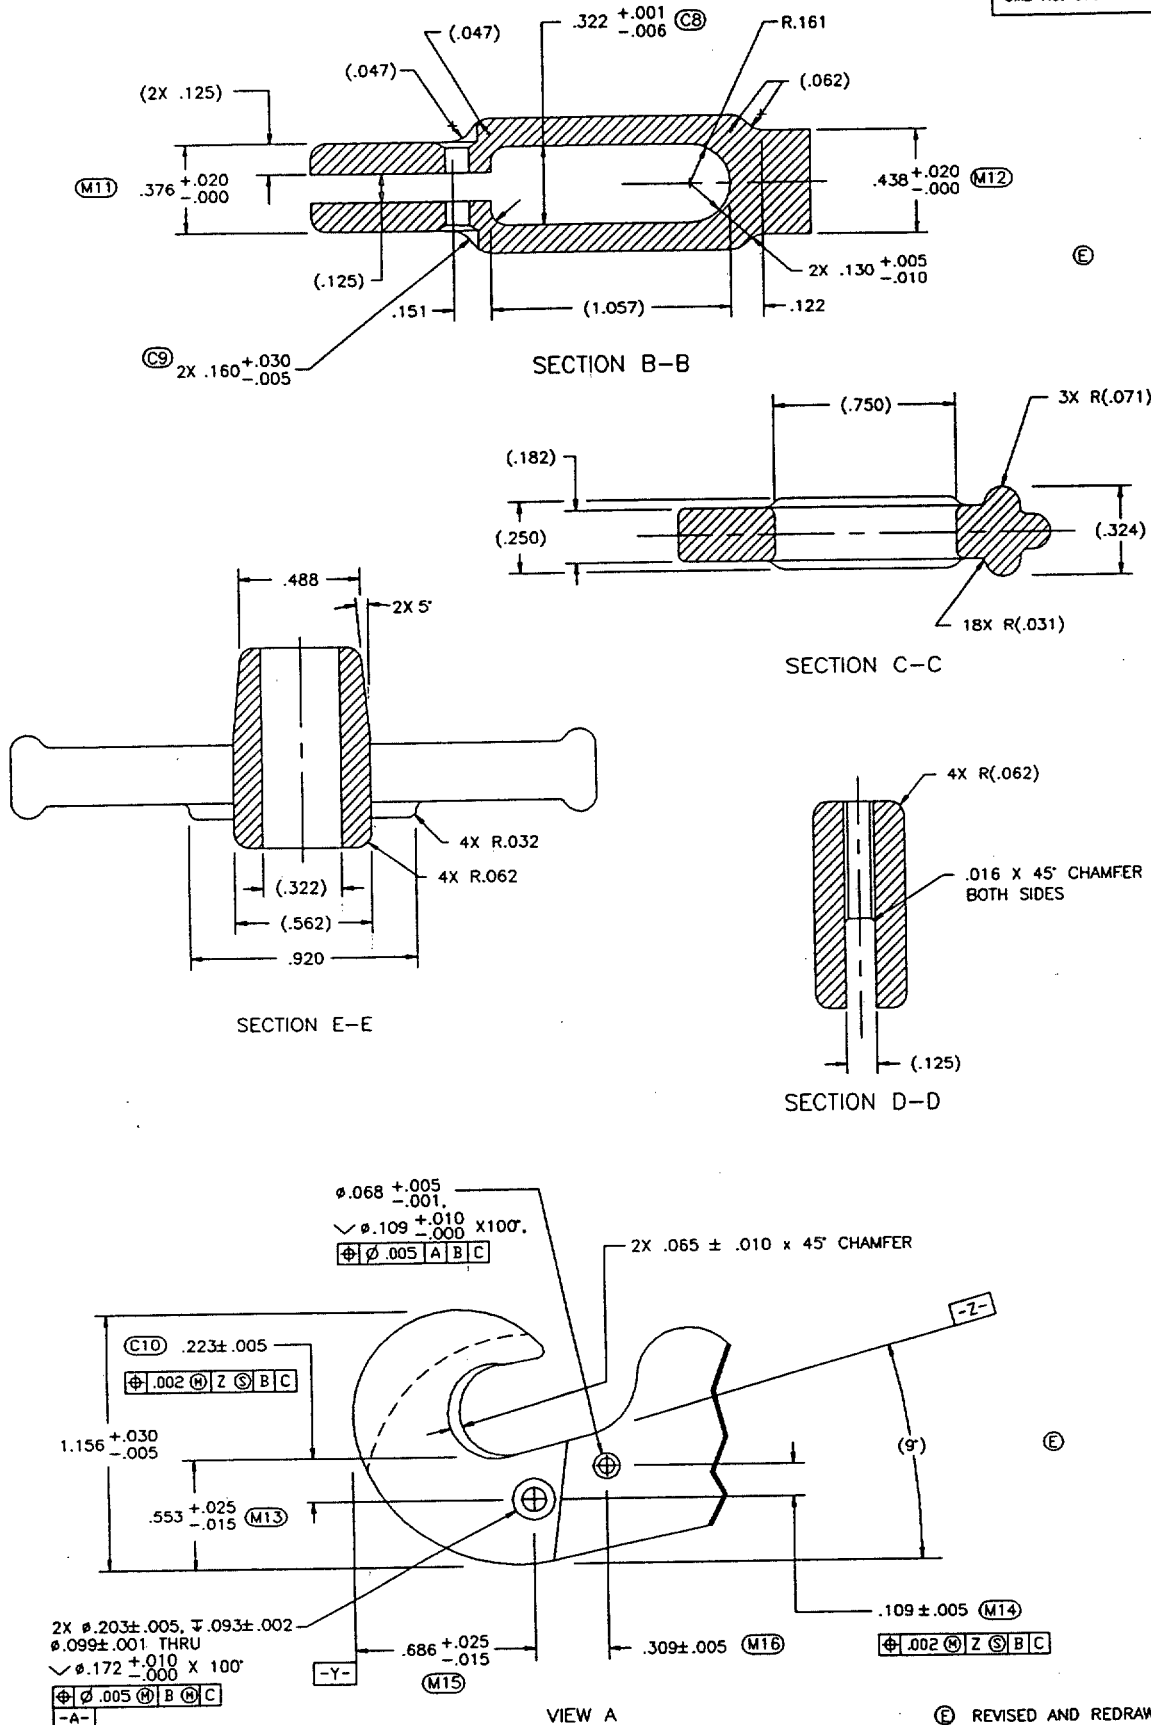

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818

MILITARY SPECIFICATION SHEET
TITLE: SNAP, PARACHUTE HARNESS
QUICK-FIT EJECTOR




SPECIFICATION SHEET NUMBER
MS22018 REVISION E 30 SEP 93
SUPERSEDING
MS22018 REVISION D 13 SEP 91
AMSC- N/A FSC: 1670

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED

PAGE 4 OF 12

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195

FORM APPROVED
OMB NO. 0704-0188

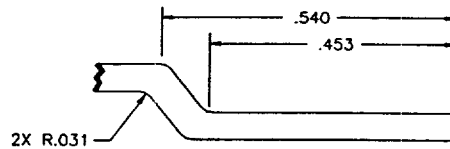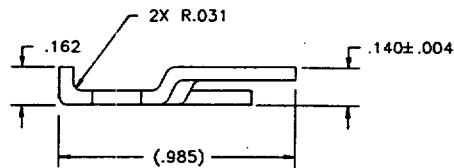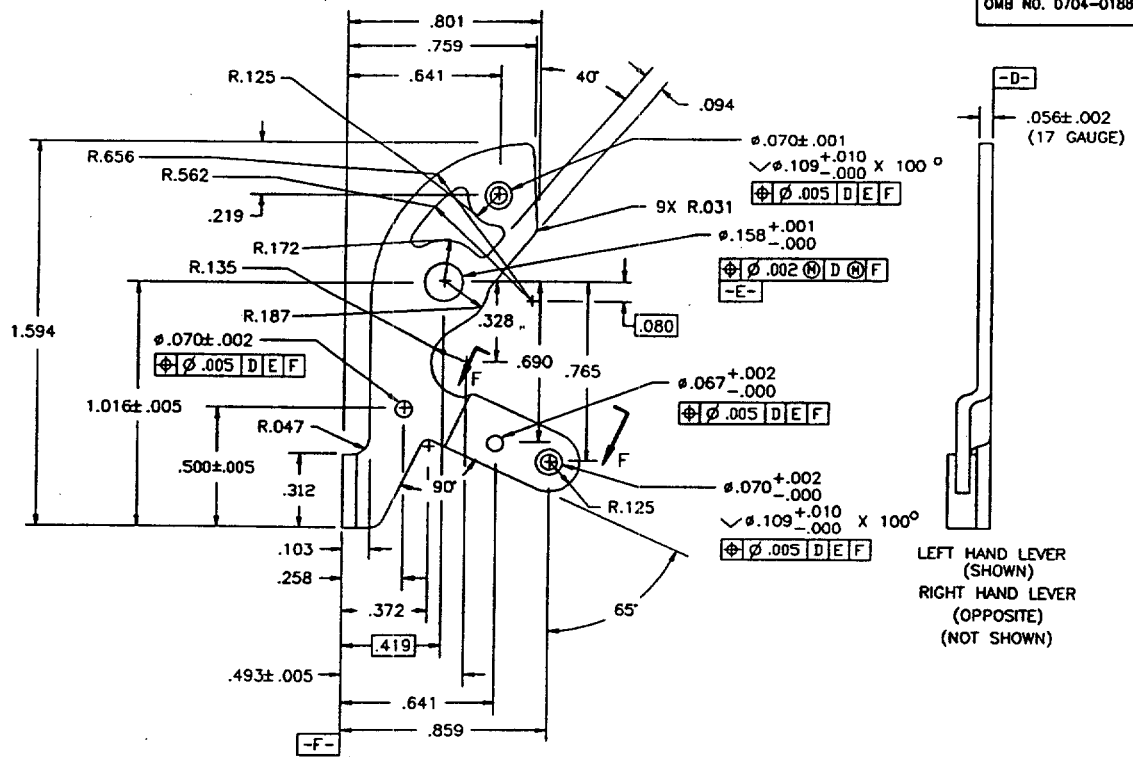

SECTION F-F
ROTATED 25° CCW

LEVER ARM

(E) REVISED AND REDRAWN

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-GL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818

MILITARY SPECIFICATION SHEET
TITLE: SNAP, PARACHUTE HARNESS
QUICK-FIT EJECTOR




SPECIFICATION SHEET NUMBER
MS22018 REVISION E 30 SEP 93
SUPERSEDING
MS22018 REVISION D 13 SEP 93
AMSC- N/A FSC: 1670

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED


PAGE 5 OF 12

THIS SPECIFICATION IS APPROVED FOR USE
BY ALL DEPARTMENTS AND AGENCIES OF THE
DEPARTMENT OF DEFENSE.

THIS SPECIFICATION IS APPROVED FOR USE
BY ALL DEPARTMENTS AND AGENCIES OF THE
DEPARTMENT OF DEFENSE.

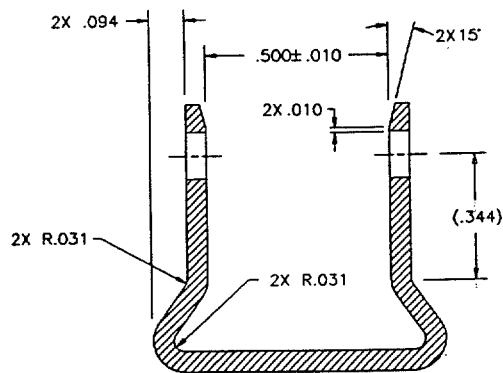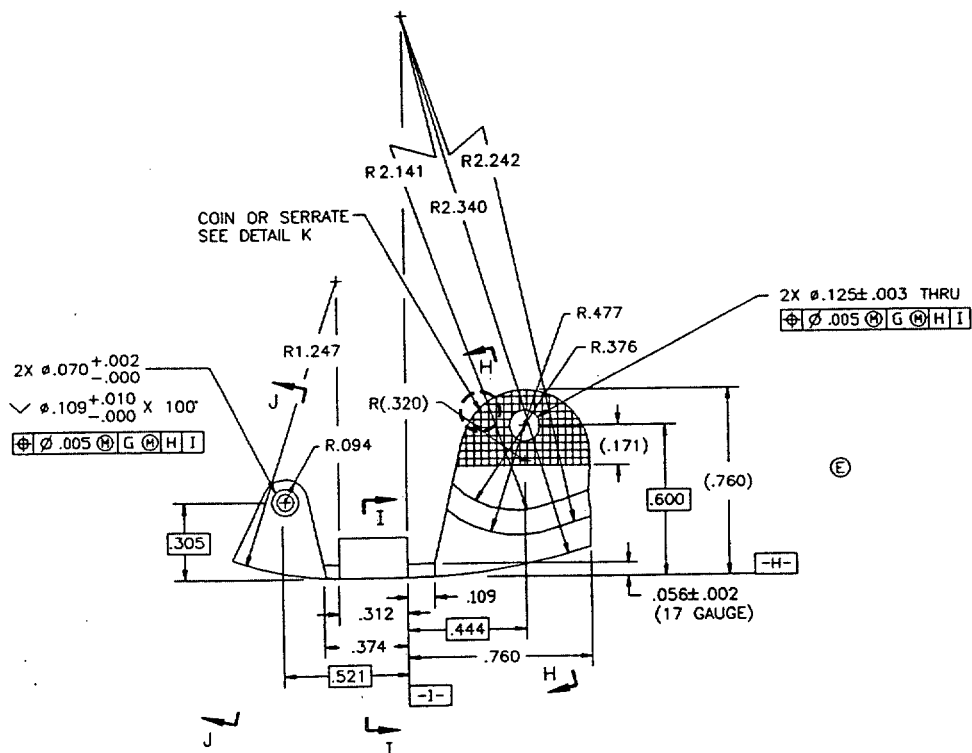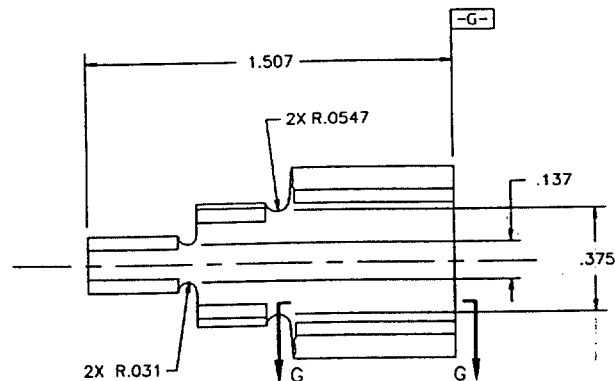

SECTION H-H

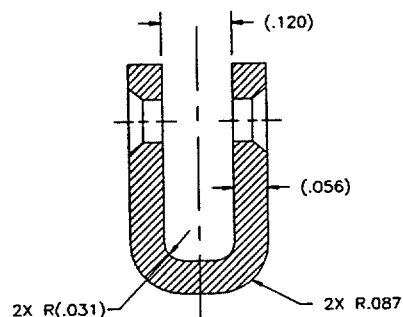

SECTION J-J

(E) REVISED AND REDRAWN

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-GL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818


MILITARY SPECIFICATION SHEET
TITLE: SNAP, PARACHUTE HARNESS
 QUICK-FIT EJECTOR

SPECIFICATION SHEET NUMBER		
MS22018	REVISION E	30 SEP 93
SUPERSEDING		
MS22018	REVISION D	13 SEP 91
AMSC- N/A		FSC: 1670


DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED

PAGE 6 OF 12


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195

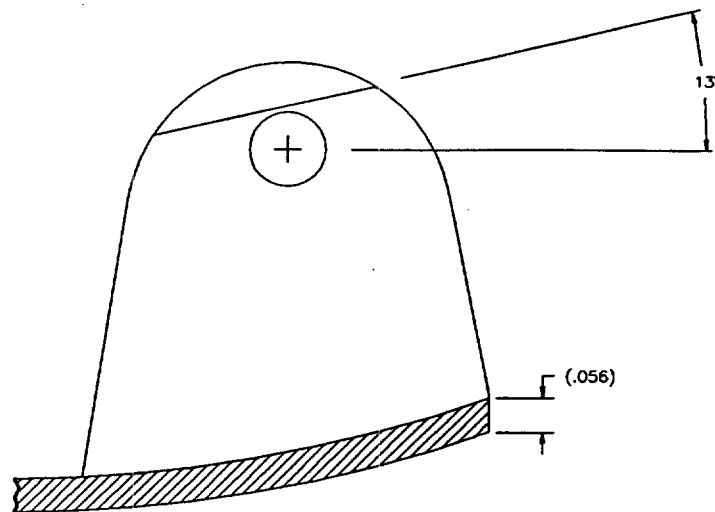

SECTION G-G

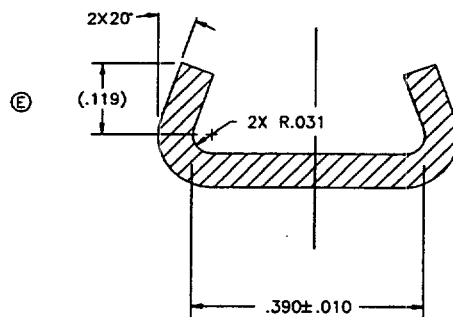

SECTION I-I



DETAIL K

Ⓔ REVISED AND REDRAWN

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-GL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818

MILITARY SPECIFICATION SHEET
TITLE: SNAP, PARACHUTE HARNESS
QUICK-FIT EJECTOR


SPECIFICATION SHEET NUMBER
MS22018 REVISION E 30 SEP 93
SUPERSEDING
MS22018 REVISION D 13 SEP 91
AMSC- N/A FSC: 1670

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED

PAGE 7 OF 12

THIS SPECIFICATION IS APPROVED FOR USE
BY ALL DEPARTMENTS AND AGENCIES OF THE
DEPARTMENT OF DEFENSE.



THIS SPECIFICATION IS APPROVED FOR USE
BY ALL DEPARTMENTS AND AGENCIES OF THE
DEPARTMENT OF DEFENSE.

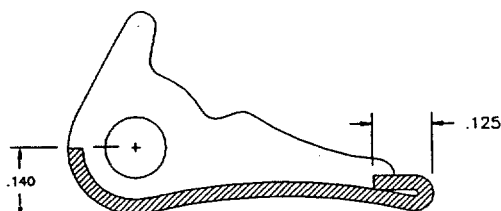



GUARD

PAGE 8 OF 12

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195

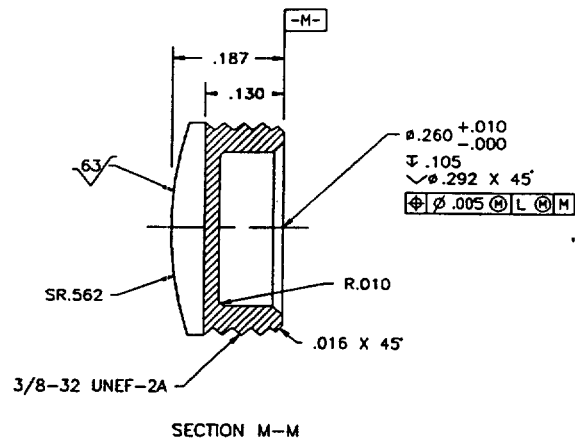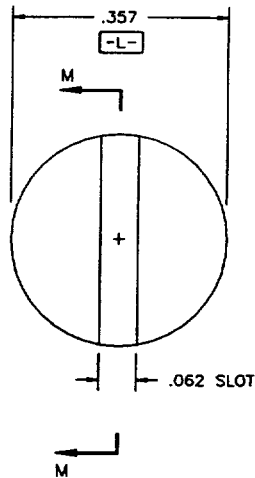


RETAINER, SPRING

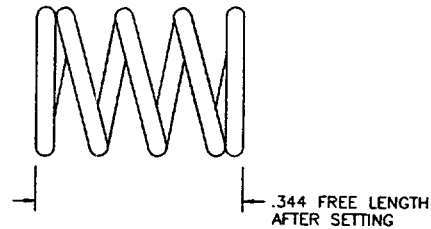

SPRING DATA	
WIRE DIA	.032 ± .005
DIRECTION OF HELIX	RIGHT OR LEFT HAND
TOTAL COILS	5.139
SOLID HEIGHT	.196
DEFLECTION RATE	42 LB/IN
TYPE OF ENDS	CLOSED ENDS NOT GROUND
5.0 ± 0.5 LB LOAD AT .225 MEAN ASSEMBLED LENGTH.	

SPRING, COMPRESSION

Ⓔ

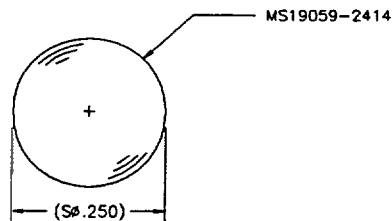

BALL

Ⓔ REVISED AND REDRAWN

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-GL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818

MILITARY SPECIFICATION SHEET
TITLE: SNAP, PARACHUTE HARNESS
QUICK-FIT EJECTOR


SPECIFICATION SHEET NUMBER
MS22018 REVISION E 30 SEP 93
SUPERSEDING
MS22018 REVISION D 13 SEP 91
AMSC- N/A FSC: 1670

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED


PAGE 9 OF 12

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195

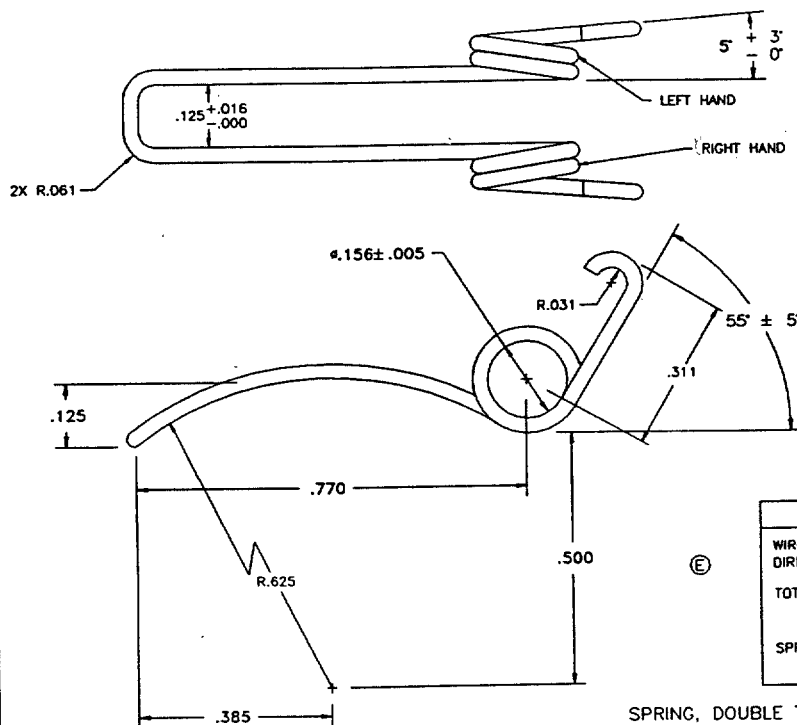

SPRING, DOUBLE TORSION

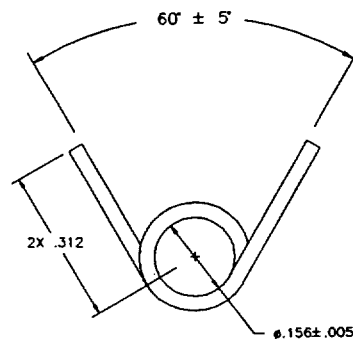

SPRING DATA	
WIRE DIA	.0300 ± .0005
DIRECTION OF HELIX	RIGHT HAND
TOTAL COILS	2 1/2 (2 COILS WOUND CLOSELY)
SPRING RATE	3 IN-LBS TORQUE

SPRING, SINGLE TORSION

Ⓔ REVISED AND REDRAWN

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-GL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818

MILITARY SPECIFICATION SHEET
TITLE: SNAP, PARACHUTE HARNESS
QUICK-FIT EJECTOR



SPECIFICATION SHEET NUMBER
MS22018 REVISION E 30 SEP 93
SUPERSEDING
MS22018 REVISION D 13 SEP 91
AMSC- N/A FSC: 1670

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED



PAGE 10 OF 12

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.



THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195





BUSHING, GUARD

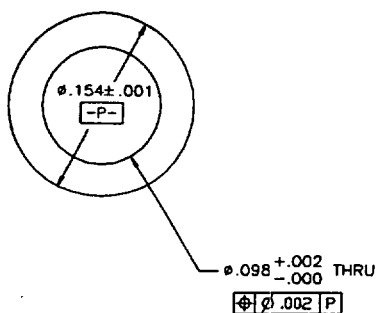

BUSHING, LEVER ARM

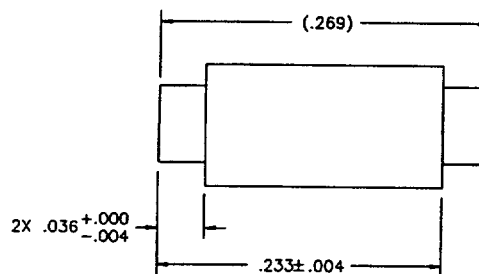

PIN

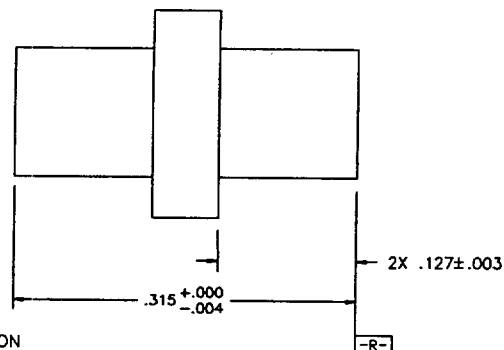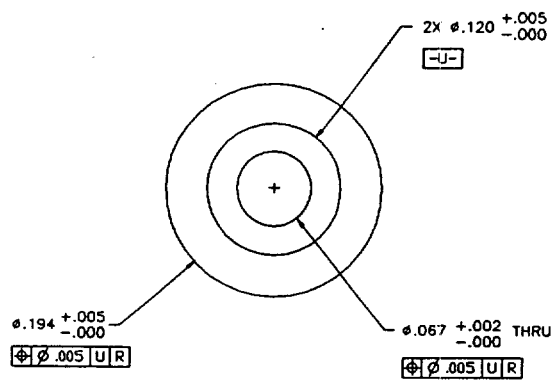

BUSHING, DOUBLE TORISON

(E) REVISED AND REDRAWN

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-GL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818

MILITARY SPECIFICATION SHEET
TITLE: SNAP, PARACHUTE HARNESS
QUICK-FIT EJECTOR

SPECIFICATION SHEET NUMBER
MS22018 REVISION E 30 SEP 93
SUPERSEDING
MS22018 REVISION D 13 SEP 91
AMSC- N/A FSC: 1670

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED

PAGE 11 OF 12

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-H-7195

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

NOTES:

1. MATERIALS:

- (A) GUARD BUSHING, LEVER ARM BUSHING, DOUBLE TORSION BUSHING, SPRING RETAINER AND PIN; TYPE 303, TYPE I, IN ACCORDANCE WITH AMS 5640.
- (B) LEVER ARM, GUARD AND GRIP; TYPE 302 OR 304 IN ACCORDANCE WITH AMS 5513.
- (C) COMPRESSION SPRING, DOUBLE TORSION SPRING AND SINGLE TORSION SPRING; TYPE 302 CLASS I OR 304 IN ACCORDANCE WITH ASTM A313-87.
- (D) HOOK BODY; HOT FORGED STEEL TYPE 4140 IN ACCORDANCE WITH MIL-S-5626 AND MIL-F-7190 GRADE A. FORGING GRAIN FLOW PATTERN SHALL BE PARALLEL WITH THE PREDOMINANT TENSILE STRESSES (AS INDICATED BY ARROWS). (E)

2. HEAT TREATMENT:

- (M18) (A) HOOK BODY; HEAT TREAT IN ACCORDANCE WITH MIL-H-6875, CLASS A, CONDITION H850, TENSILE STRENGTH RANGE OF 170 KSI TO 190 KSI (ROCKWELL C36 TO C41).
- (M19) (B) GUARD BUSHING, LEVER ARM BUSHING, DOUBLE TORSION BUSHING, SPRING RETAINER AND PIN; SHALL HAVE A MINIMUM HARDNESS OF ROCKWELL C23. (E)

3. FINISH:

- (M20) (A) GUARD BUSHING, LEVER ARM BUSHING, DOUBLE TORSION BUSHING, PIN, GRIP, SPRING RETAINER, LEVER ARM, GUARD, COMPRESSION SPRING, DOUBLE TORSION SPRING AND SINGLE TORSION SPRING; PASSIVATE IN ACCORDANCE WITH QQ-P-35, TABLE II, FOR MATERIAL BEING USED.
- (M21) (B) HOOK BODY; CADMIUM PLATING, CLASS I, TYPE I, IN ACCORDANCE WITH QQ-P-416. BAKE AT A MINIMUM OF 375 °F ± 25 °F FOR 3 HOURS MINIMUM, WITHIN FOUR HOURS AFTER PLATING, FOR EMBRITTLEMENT RELIEF.
- (M22) 4. ALL EDGES, INCLUDING EDGES OF HOLES, SHALL BE ROUNDED, TOP AND BOTTOM, WITH A MINIMUM RADIUS OF .005. PART SHALL BE SMOOTH AND FREE FROM FLASHING, PITS AND BURRS.
- (M23) 5. SURFACE ROUGHNESS SHALL BE $\sqrt{125}$ UNLESS OTHERWISE SPECIFIED. SURFACE CONDITION SHALL BE IN ACCORDANCE WITH ANSI B46.1.
6. ALL DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED FOR THE CRITICAL, MAJOR AND MINOR, TOLERANCES SHALL BE +0.030 AND -0.016 (DECIMALS) AND ± 1° (ANGLES). INTERPRET DIMENSION AND TOLERANCES IN ACCORDANCE WITH ANSI Y14.5M-1982.
- (C12) 7. EVERY HOOK BODY SHALL BE PROOF LOADED TO 2500 POUNDS (AS INDICATED), HELD FOR A MINIMUM OF 1 SECOND, AFTER HEAT TREAT AND MACHINING. FOLLOWING PROOF LOADING, INSPECT BY MAGNETIC PARTICLE INSPECTION IN ACCORDANCE WITH MIL-H-7195. (E)
- (C14) 8. ASSEMBLED SNAP ASSEMBLY SHALL BE PROOF LOADED TO 2500 POUNDS, HELD FOR A MINIMUM OF 1 SECOND, WITHOUT ANY BREAKAGE. IF ANY BREAKAGE, LOT SHALL BE REJECTED. (E)
- (C13) 9. ONE ASSEMBLY OF EACH INSPECTION LOT LESS THAN 500 OR ONE IN EVERY 500, SHALL BE LOADED TO 3750 POUNDS AND HELD FOR 15 SECONDS WITHOUT ANY BREAKAGE (AS INDICATED) ASSEMBLY SUBJECTED TO THIS SHALL NOT BE PLACED IN SERVICE. IF BREAKAGE, LOT SHALL BE REJECTED. (E)
- (C11) 10. RIVETS SHALL BE DRIVE COLD SATISFACTORILY WITH HEAD FREE FROM CRACKS AND OTHER DEFORMITIES. RIVETS SHALL BE TRUE TO FORM AND POSITION. UP-SET END OF RIVETS SHALL COMPLETELY FILL COUNTERSINK, BUT, RIVET HEADS SHALL NOT PROJECT BEYOND SURFACES OF THE EJECTOR SNAP ASSEMBLY, AFTER ASSEMBLY. (E)
- (C15) 11. GUARD BUSHING, LEVER ARM BUSHING, DOUBLE TORSION BUSHING, PIN, SPRING RETAINER, GUARD, DOUBLE TORSION SPRING AND SINGLE TORSION SPRING SHALL BE COATED WITH DRY FILM LUBRICITE IN ACCORDANCE WITH DOD-L-85645, TYPE I OR II, BEFORE ASSEMBLY. (E)

CRITICAL CHARACTERISTICS:

- (C1) THRU (C11) AND (C14) : SAMPLE SIZE IN ACCORDANCE WITH MIL-STD-105, GENERAL INSPECTION LEVEL II, SINGLE NORMAL SAMPLING, ACCEPT NO DEFECTS. (E)
- (C12), (C13) AND (C15) : INSPECT 100%, ACCEPT NO DEFECTS.

MAJOR CHARACTERISTICS:

- (M1) THRU (M25) : SAMPLE SIZE IN ACCORDANCE WITH MIL-STD-105, GENERAL INSPECTION LEVEL II, SINGLE NORMAL SAMPLING, AQL 2.5. (E)

UNLESS OTHERWISE STATED ALL OTHER DIMENSIONS IN THIS DOCUMENT ARE FOR MANUFACTURING PURPOSES. THE PROCURING ACTIVITY RESERVES THE RIGHT TO INSPECT/VERIFY THESE DIMENSION AT ANYTIME.

(E) REVISED AND REDRAWN

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-GL NAVY-AS
AIR FORCE-11
REVIEW:
USER:
PROJECT NUMBER: 1670-0818

MILITARY SPECIFICATION SHEET
TITLE: SNAP, PARACHUTE HARNESS
QUICK-FIT EJECTOR

SPECIFICATION SHEET NUMBER
MS22018 REVISION E 30 SEP 93
SUPERSEDING
MS22018 REVISION D 13 SEP 91
AMSC- N/A FSC: 1670

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED

PAGE 12 OF 12