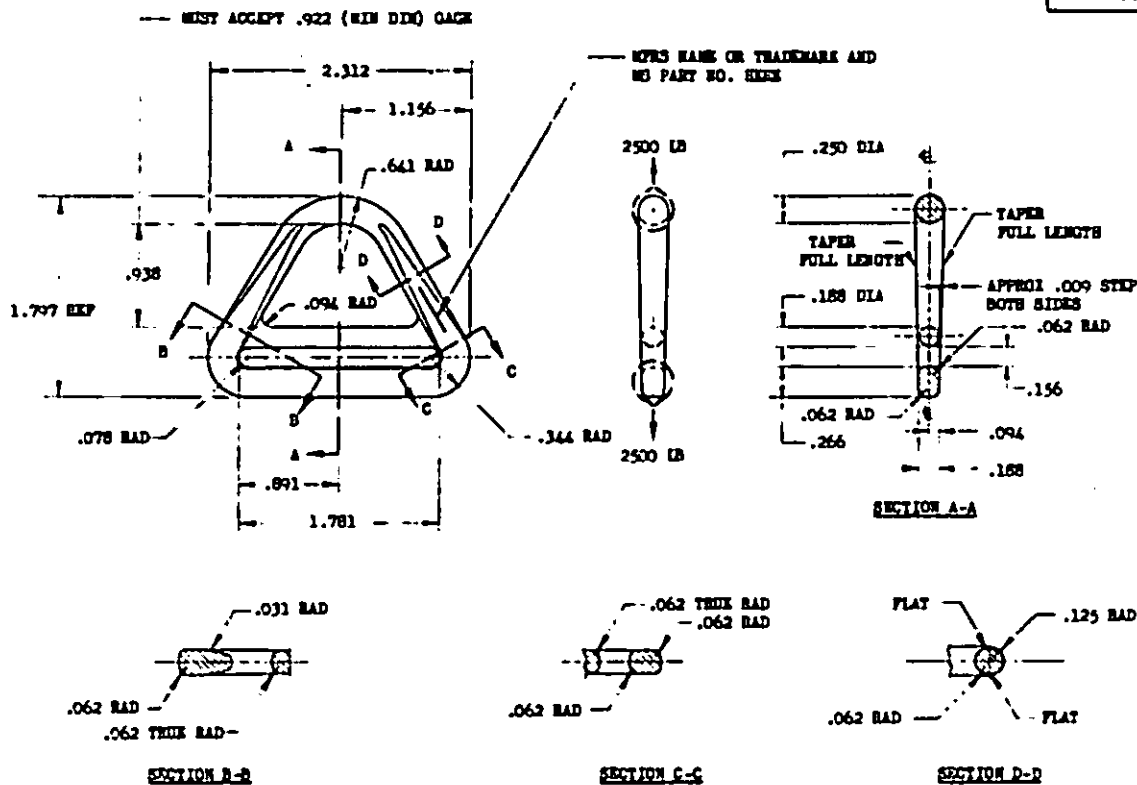


FED. SUP CLASS
1670

MS PART NO.	FILE
MS22020-1	

LINKS SHALL BE PROOF LOADED AS SPECIFIED HEREON, INDICATED BY ARROWS.

MATERIAL: STEEL, SPEC MIL-S-3626 OR MIL-S-6049.

METHOD OF FORMING: HOT FORGE.

HEAT TREATMENT: SPEC MIL-H-6875
ROCKWELL C38 TO C42. DECARBURIZATION SHALL NOT EXCEED .010

FINISH: CADMIUM PLATE, SPEC QQ-P-416, TYPE 1, CLASS A.

REMOVE ALL BURRS AND SHARP EDGES.

LINKS SHALL BE SMOOTH AND FREE FROM FINS AND PITS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS : .030

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREON.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS DRAWING HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

(B) REVISED AND REDRAWN

P.A. NAVY - AS Other Cost	TITLE LINK, PARACHUTE HARNESS TRIANGLE	MILITARY STANDARD MS22020 (AS)
PROCUREMENT SPECIFICATION MIL-H-7195	SUPSEDES:	SHEET 1 OF 1

DD FORM 672-1 (limited circulation)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 1670-N658

PLATE NO.

APPROVED 23 MAY 1957
REVISED
27 NOV 81

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.