


FED. SUP CLASS.
1660

Review activities:
Navy - WF
USAF - 11, 11

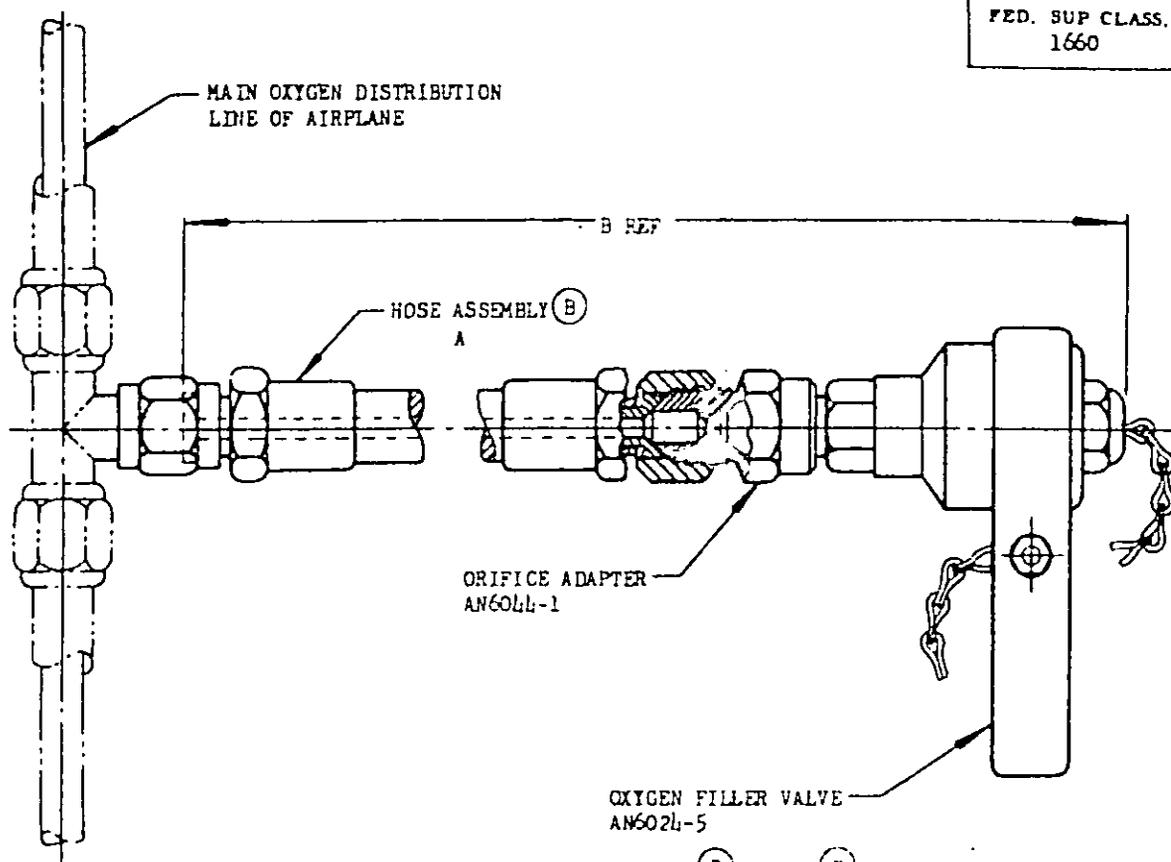

DASH NO.	A	B
-1	MS24548-5-24	27.625
-2	MS24548-5-18	21.625

DIMENSIONS IN INCHES.

ALL PARTS SHALL BE CLEAN, DRY AND FREE FROM OIL, GREASE, AND OTHER FOREIGN SUBSTANCES.

ASSEMBLY MUST BE LEAKPROOF WITH 400 POUNDS PER SQUARE INCH OXYGEN PRESSURE.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

This standard has been approved by the Department of the Air Force and the Bureau of Naval Weapons.

P.A. Navy - WP Other Cust USAF - 11	TITLE RECHARGER ASSEMBLY, PORTABLE OXYGEN	MILITARY STANDARD MS22032(ASG)
Procurement Specification NONE	SUPERSEDES: AN60L1	SHEET 1 OF 1

APPROVED 28 Oct 57 REVISED A 25 OCT 62 (B) 20 Apr. 66