

FED. SUP CLASS
1680LEFT SIDE OF BELT
SEE SHEET 2RIGHT SIDE OF BELT
SEE SHEET 345.00 ± 1.00 AT MAXIMUM ADJUSTMENT FOR -6
40.00 ± 1.00 AT MAXIMUM ADJUSTMENT FOR -5
34.00 ± 1.00 AT MAXIMUM ADJUSTMENT FOR -4

BELT ASSEMBLY

MS22033-1, -2 & -3 ARE CANCELED.
EXISTING STOCKS SHOULD BE USED UNTIL
DEPLETED

ASSY DASH NO.	FORMER DASH NO.
-4	-1
-5	-2
-6	-3

NOTES:



1. MATERIAL: a. WEBBING, NYLON, SPECIFICATION MIL-W-8630, TYPE III, SAGE GREEN.
b. PULL TAB, NYLON, SPECIFICATION MIL-W-4088, TYPE II, CONDITION U, OR MIL-T-5038, TYPE IV, SAGE GREEN.
c. POCKET, NYLON, SPECIFICATION MIL-T-5038, TYPE II, SAGE GREEN.
d. THREAD, NYLON, SPECIFICATION V-T-295, TYPE I, NO. 6 CORD, SAGE GREEN.
e. THREAD, NYLON, SPECIFICATION V-T-295, TYPE I, SIZE E, SAGE GREEN.
2. FINISH: MATERIAL DIED SAGE GREEN SHALL BE A VISUAL MATCH TO USAF SAGE GREEN NO. 1531. ALL STITCHING SHALL BE IN ACCORDANCE WITH FED STD NO. 751, TYPE 301, WITH **NOT LESS** THAN 4 NOR MORE THAN 6 STITCHES PER INCH. EXCEPT AS NOTED. ENDS OF STITCHING TO BE BACKSTITCHED A DISTANCE OF NOT LESS THAN 1/2 INCH. STITCHING TO BE WITH NO. 6 CORD NYLON THREAD, EXCEPT AS NOTED.
SEAR EXPOSED ENDS OF WEBBING TO PREVENT FRAYING. AVOID FORMING SHARP EDGES.
3. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.06.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

E REVISED AND REDRAWN


P.A. NAVY - AS Other Cust	TITLE BELT, AIRCRAFT SAFETY, LAP	MILITARY STANDARD MS22033(AS)
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: NAF 1201-8B, MS22033(WEP)	SHEET 1 OF 3

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
1680

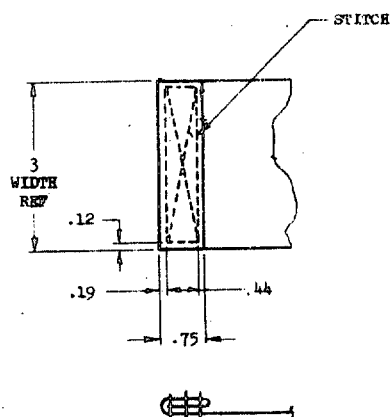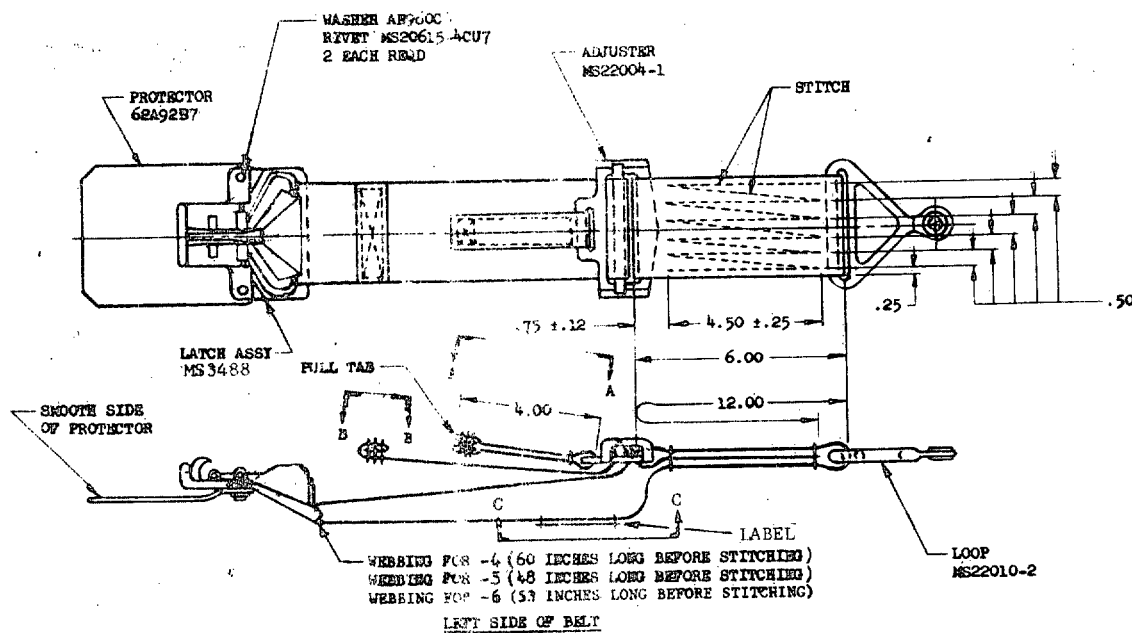

VIEW B-B
ENLARGED

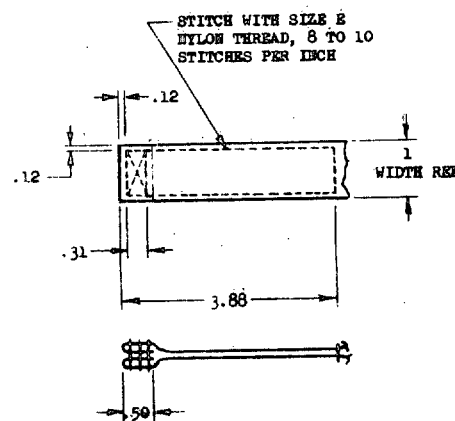


VIEW A-A
ENLARGED

APPROVED 25 OCT 57 REVISED (E) FOR CHANGES SEE SHEETS 1 THRU 3


P.A. NAVY - AS Other Cust	TITLE BELT, AIRCRAFT SAFETY, LAP	MILITARY STANDARD
		MS22033(AS)
PROCUREMENT SPECIFICATION MIL-R-81729 (AS)	SUPERSEDES: NAF 1201-84, MS22033(WEP)	SHEET 2 OF 3

FED. SUP CLASS

1680

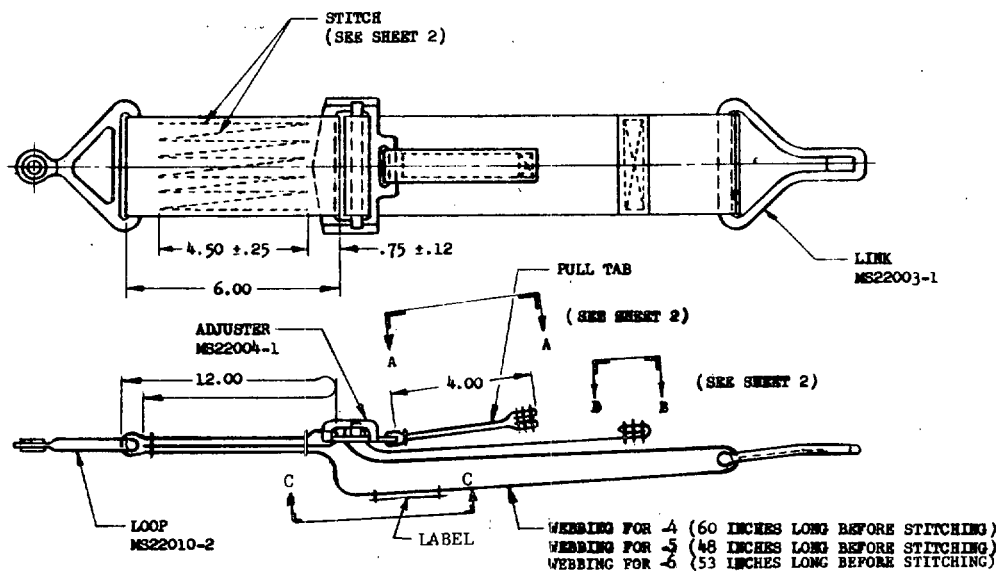

RIGHT SIDE OF BELT
(FOR DIMENSIONS NOT SHOWN SEE SHEET 2)

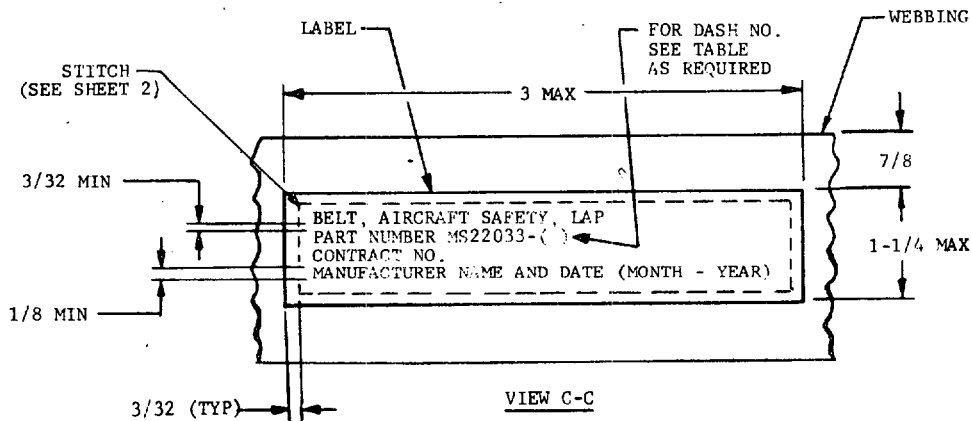

LABEL SHALL BE IN ACCORDANCE WITH
FEDERAL SPEC DDD-L-20, TYPE II,
CLASS 11 (ELEVEN)

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE BELT, AIRCRAFT SAFETY, LAP	MILITARY STANDARD MS22033(AS)
PROCUREMENT SPECIFICATION MIL-R-81729(AS)	SUPERSEDES: NAF 1201-8B, MS22033(WEP)	SHEET 3 OF 3