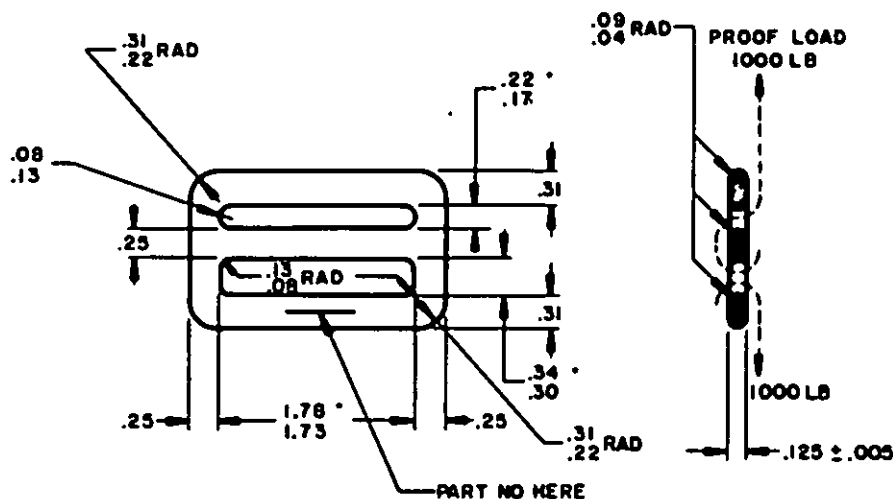


FED. SUP CLASS
 1670


DASH NO

-1

-2

(C) NOTES:

1. MATERIAL: STEEL, MIL-S-18728 OR MIL-S-18729.
2. SURFACE ROUGHNESS: UNLESS OTHERWISE SPECIFIED SURFACE ROUGHNESS SHALL BE 125 μ IN. IN ACCORDANCE WITH AMS1 446.1.
3. HEAT TREATMENT: 170,000 TO 190,000 LBS/SQ IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875.
4. FINISH: -1, CADMIUM PLATE, QQ-P-416, CLASS 1, TYPE 1.
-2, PHOSPHATE COAT, QQ-D-16232, TYPE 2, CLASS 4, FOLLOWED BY MIL-M-3688.
5. ADAPTER SHALL BE SUBJECTED TO THE PROOF LOAD SPECIFIED HEREIN AS INDICATED BY ARROWS, IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.
6. DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED HEREIN, TOLERANCES $\pm .03$.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. END ITEM EXAMINATION:
 - A. CRITICAL DIMENSIONS: AS SHOWN.
 - B. CRITICAL FUNCTIONAL TEST: NONE.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. USAF - 02 Other Code NAVY - AS ARMY - GL AF - 92 C	TITLE ADAPTER - PARACHUTE HARNESS STRAP	MILITARY STANDARD
		MS22047
PROCUREMENT SPECIFICATION REL-67196	SUPERSEDES: AMS65	SHEET 1 OF 1

 Der activities:
 NAVY - MC

 Review activities:
 ARMY - AV
 AIR FORCE - 11

"DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited."

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Deviation for all new engineering and design applications and for repetitive use shall be made from this document.