
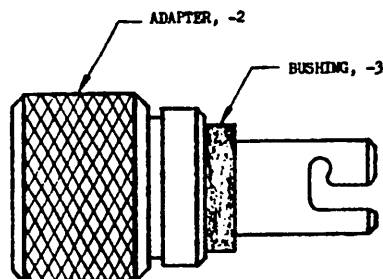
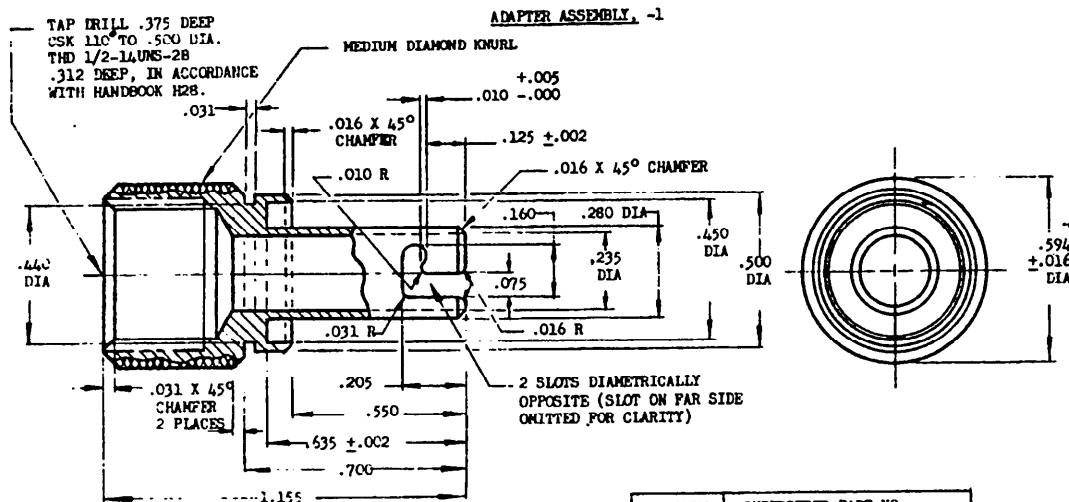


FED. SUP CLASS
4220

DASH NO.	CONSISTS OF
-1	-2 ADAPTER AND -3 BUSHING





DASH NO.	SUPERSEDED PART NO.
-2	62B4356

ADAPTER, -2

REMOVE ALL BURRS AND SHARP EDGES.

MATERIAL: STEEL BAR (CRES)
QQ-S-764, TYPE 416 PLUS Z,
CONDITION A.
HEAT TREAT 170,000 TO
200,000 PSI TENSILE
STRENGTH IN ACCORDANCE
WITH MIL-H-6875.



MATERIAL: RUBBER,
FLUID RESISTANT,
MIL-T-25897, TYPE II,
CLASS 1.

DASH NO.	SUPERSEDED PART NO.
-3	62A4357

BUSHING, -3

INTERCHANGEABILITY RELATIONSHIP: MS23004-2 ADAPTER IS FUNCTIONALLY AND DIMENSIONALLY INTERCHANGEABLE WITH 62B4356 ADAPTER. MS23004-3 BUSHING IS FUNCTIONALLY AND DIMENSIONALLY INTERCHANGEABLE WITH 62A4357 BUSHING. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±.2. ADAPTER FOR USE WITH TYPES I, II, III AND IV PUMPS CONFORMING TO MIL-P-8258. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCE HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

This military standard is approved by the Department of the Air Force SSG (11) Review activities: USAF - 11, 84 Navy - AS

This military standard is approved by the Department of the Air Force SSG (11) Review activities: USAF - 11, 84 Navy - AS

and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11
Other Cost
Navy - AS

TITLE

ADAPTER, STRAIGHT, 1/2-14
TO NOCE. DISTILLATION PIG

PROCUREMENT SPECIFICATION

SUPERSEDES:

USAF (MGR) 62B4356, 62A4357

MILITARY STANDARD

MS23004(ASG)

SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

U.S. GOVERNMENT PRINTING OFFICE: 1957-561-510/548

APPROVED 24 MAR 1965
REVISED (A) 20 JULY 1967