



FED. SUP CLASS
6115

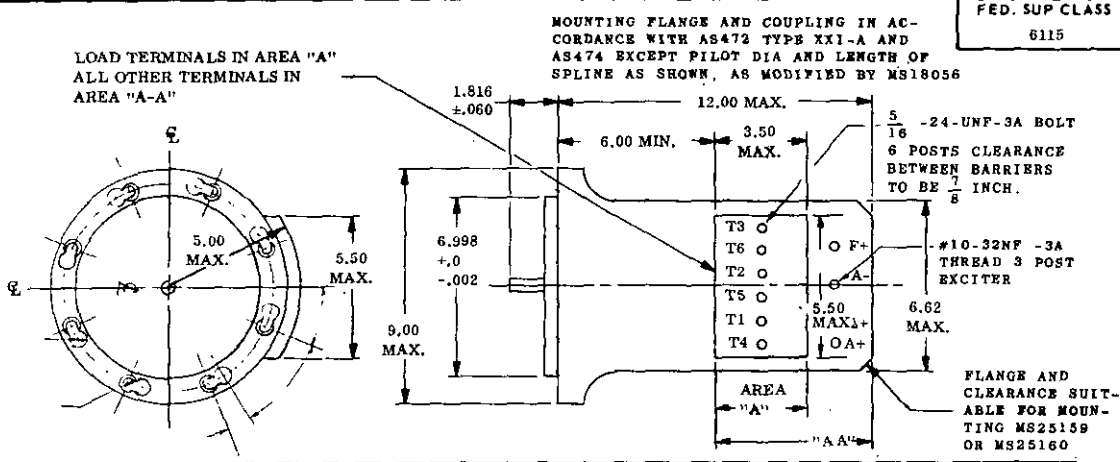

GENERATOR			
RATED VOLTAGE	120/208V	EFFICIENCY MIN. AT RATED LOAD	80%
RATED OUTPUT	20 KVA	MAX. WEIGHT	50 LB.
PHASE	3	OVERHUNG MOMENT, MAX.	300 IN. LB.
SPEED RANGE	7600-8400 RPM	FREQUENCY	380-420 CPS
MAX. SPEED FOR REGULATION	8800 RPM	CLASS	C
OVERSPEED	10,500 RPM	SHEAR	1200 IN.-LB. ±10%
RATED POWER FACTOR	.75 LAGGING TO 1.0	ROTATION	FACING DRIVE END COUNTER CLOCKWISE

CANCELED AFTER 22, APRIL 1976
(E) SUPERSEDED BY MS-90313

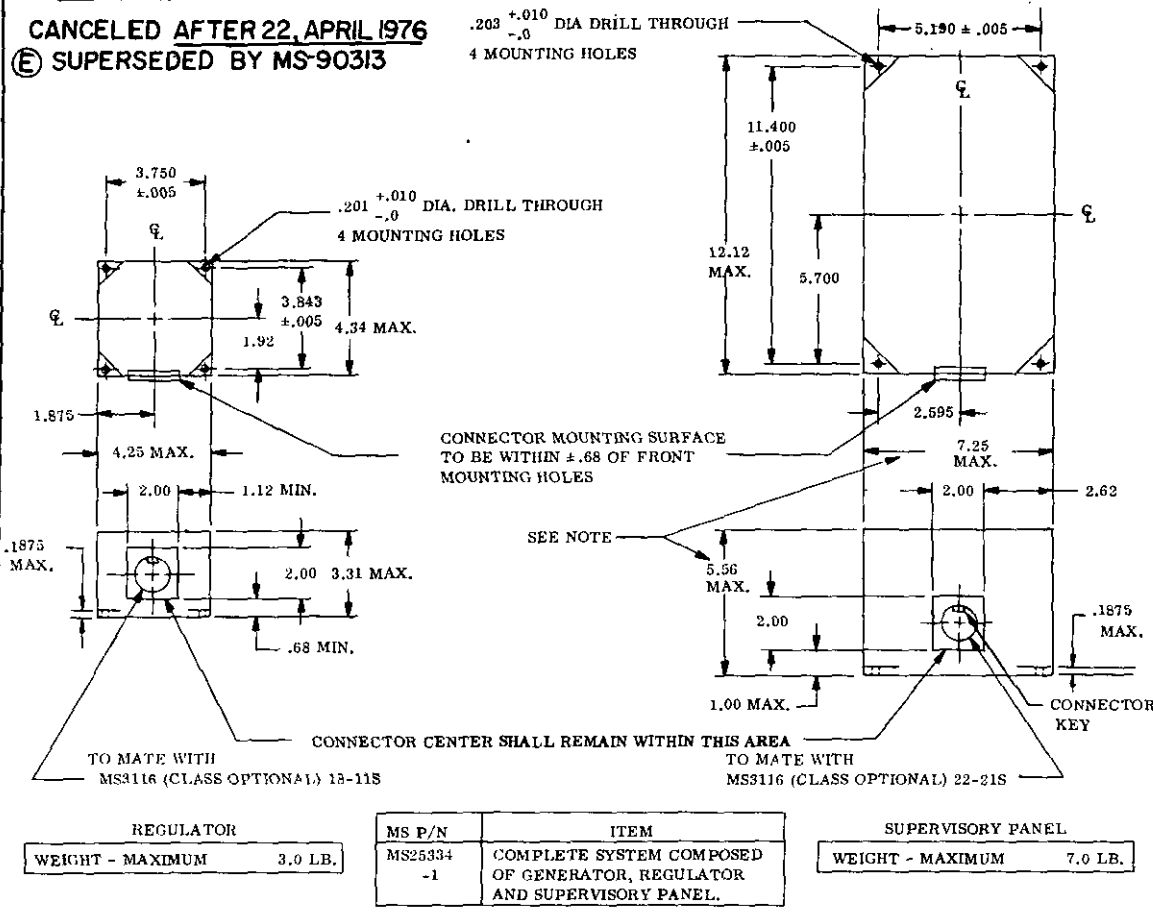

This standard has been approved by the Bureau of Naval Weapons Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY-WEPS Other Cust	TITLE GENERATOR SYSTEM, 400 CYCLE ALTERNATING CURRENT, INTEGRALLY EXCITED, 20KVA	MILITARY STANDARD MS25334 (Weps)
PROCUREMENT SPECIFICATION MIL-G-21480	SUPERSEDES:	SHEET 1 OF 4

APPROVED 30 OCT. 58 REVISED (A) 1 AUG. 60 (B) 14 FEB. 1963 (C) 9 APR 1964 (D) 21 JULY 1975 (E) 22 APRIL 1976