



FED. SUP CLASS  
6150

User activities:

Review activities:

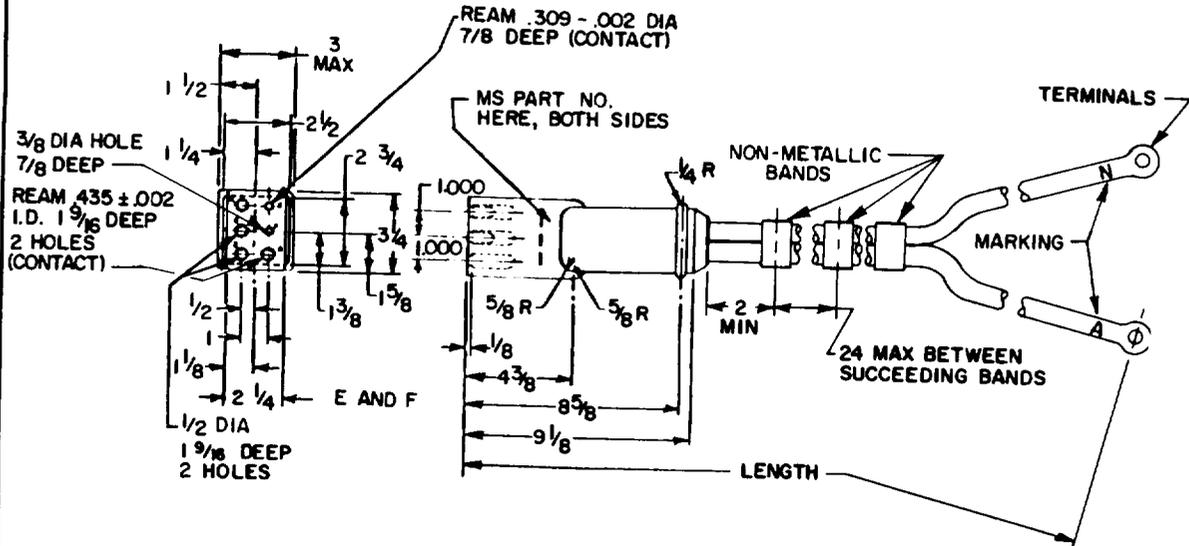

MS PART NO.	LENGTH IN. FT ± 2 IN.	AWG WIRE SIZE	TERMINAL (2 REQ'D)
MS24122-1	20	2	MS20659-133
MS24122-2	30	2	MS20659-133
MS24122-3	40	2	MS20659-133
MS24122-4	60	2	MS20659-133
MS24122-5	20	1/0	MS20659-135
MS24122-6	30	1/0	MS20659-135
MS24122-7	40	1/0	MS20659-135
MS24122-8	60	1/0	MS20659-135

1/ Jumper - Socket contact "E" to socket contact "N" with AWG No. 14 wire.

MATERIAL: Plug - molded to cable - rubber or synthetic rubber suitable for operation at temperatures down to -65°C.

Dimensions in inches. Unless otherwise specified tolerances are: Fractions ± 1/64, Decimals ± .008.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Ⓢ denotes changes

APPROVED 17 AUG 54 REVISED 10 JULY 55 5 NOV 50 28 JULY 86

This military standard is approved for use by Directorate of Electronic Support 2750 ABW/ESP, Department of the AIR FORCE, and is available for use by all Departments and Agencies of the Department of Defense.

P.A Air Force - 55 Other Cust	International Interest	TITLE <b>WIRING HARNESS-EXTERNAL POWER, 115 VOLT AC, SINGLE PHASE</b>	MILITARY STANDARD
			<b>MS24122(USAF)</b>
Procurement Specification MIL-C-7974		SUPERSEDES: USAF Drawing 50B6836	PAGE 1 OF 1

DD FORM 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.  
1 MAY 73

6150-F205