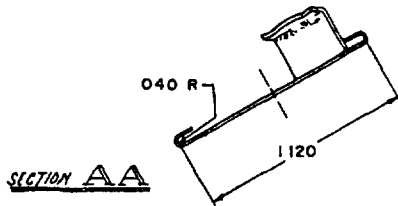
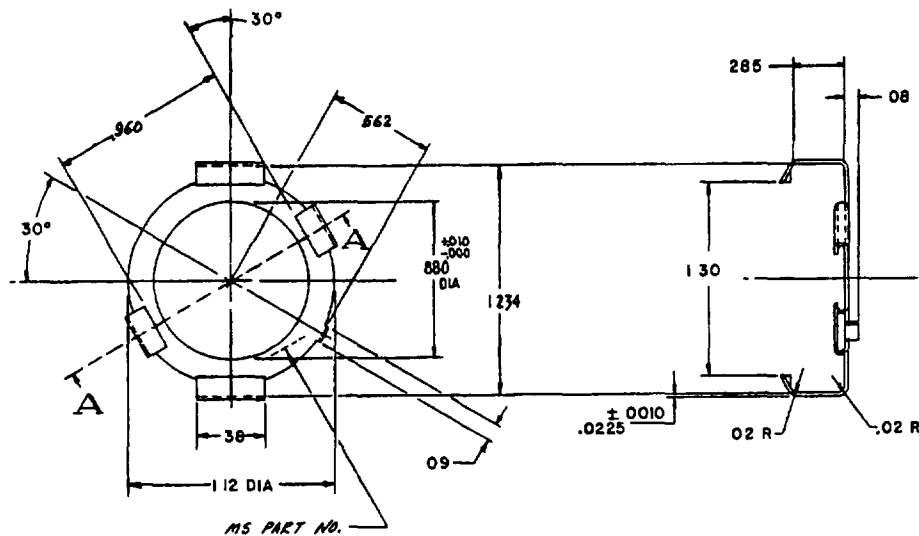


FED SUP CLASS
5935

INCHES	MM	INCHES	MM
.0010	.03	.285	7.24
.010	.25	.38	9.65
.02	.51	.562	14.27
.0225	.57	.880	22.35
.040	1.02	.960	24.38
.08	2.03	1.120	28.45
.09	2.29	1.234	31.34

MS Part No. MS24128-1

C

INACTIVE FOR NEW DESIGN
AFTER 6 DECEMBER 1971

NOTES.

- 1 Material - Phosphor bronze, spec. QQ-B-750, comp A, spring temper.
Finish - Cadmium plate, spec. QQ-P-416, type II, class 3.
- 2 Dimensions in inches. Unless otherwise specified, tolerances are $\pm .02$ (.51 mm) for two place decimals, $\pm .005$ (.13 mm) for three place decimals, and $\pm 1^\circ$ for angles.
3. Referenced documents shall be of the issue in effect on the date of invitation for bids.
4. This standard takes precedence over documents referenced herein.
- 5 The MS part number marking required on the item may be omitted by marking the packages or tagging the parts per MIL-STD-130.
- 6 Group A and B inspection is required in lieu of qualification

C REDRAWN

P A NAVY-EC	International interest	TITLE	MILITARY STANDARD
Other Cust AF-80		RING-COUPLING, FIXED	MS24128
ARMY-EL			
Procurement Specification MIL-C-28748	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-1722-11

APPROVED 31 AUG 1954 REVISED C 6 Dec 1971

User activities: Army ME, AM, WC
Navy MC, SH
Air ForceReviewer activities: Army MI, MU, AT
Navy AS, OS
Air Force II

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.