

INCH-POUND

MS24184M
 15 April 2003
 SUPERSEDING
 MS24184L
 4 March 1994

DETAIL SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 300 AMPERES, 1 PST (N.O.),
 TYPE I, WITH AUXILIARY CONTACTS,
 HERMETICALLY SEALED

This specification is approved for use by all Departments
 and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall
 consist of this specification and the latest issue of MIL-PRF-6106.


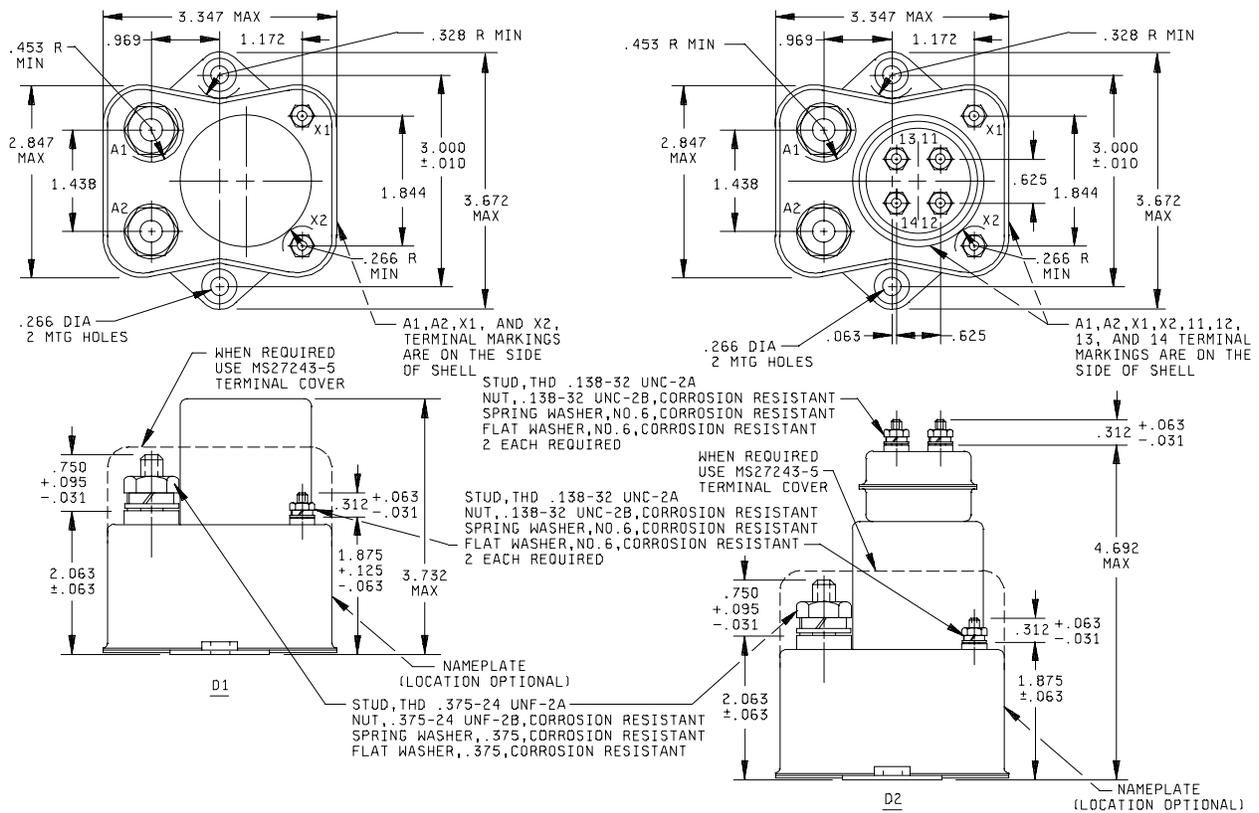


FIGURE 1. Dimensions and configurations.

MS24184M

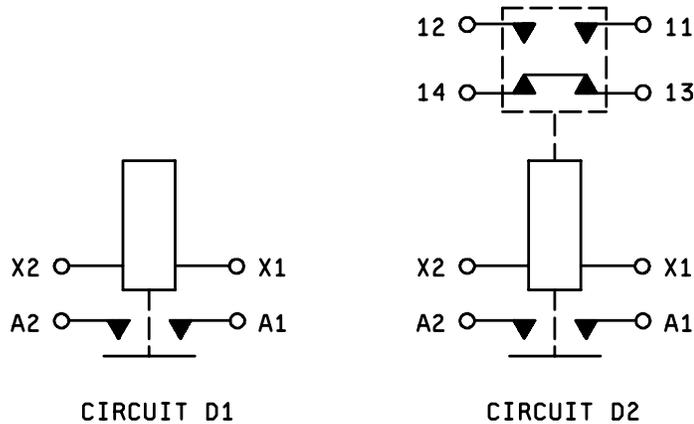

Inches	mm	Inches	mm	Inches	mm
.010	0.25	.625	15.88	3.000	76.2
.031	0.79	.750	19.05	3.347	85.01
.063	1.60	.969	24.61	3.672	93.27
.095	2.41	1.172	29.77	3.732	94.79
.125	3.18	1.438	36.53	4.692	119.18
.266	6.76	1.844	46.83		
.312	7.92	1.875	47.63		
.328	8.33	2.063	52.40		
.453	11.51	2.847	72.31		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is $\pm .031$.
4. Coil and auxiliary terminals may use additional flat washer for terminal seat.
5. Weight includes covers and barriers.
6. All test requirements of specification MIL-PRF-6106 apply except that off time for motor load shall be six seconds minimum and average contact voltage drop reading before tests shall not exceed .15 volt.
7. PIN MS24184-1 is inactive for new design after 10 December 1957.
PIN MS24184-D1 replaces MS24184-1.
8. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
9. Cadmium or cadmium compounds are prohibited on external hardware. A transition period to non-cadmium hardware is authorized for up to 1 year from the date of this revision.
10. Spring washer on drawing is a spring lock washer.

FIGURE 1. Dimensions and configurations - Continued.

MS24184M

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Dash numbers and general characteristics: See table I.

Contact data:

Load ratings: See table II.

Maximum contact drop, initial: 0.150 V.

After life test: 0.175 V.

Overload current (NO): 2,400 amperes.

Rupture current (NO): 3,000 amperes.

Coil data: See table III.

Duty rating: Continuous.

RFI specification: MIL-STD-461 (applicable to coil circuits of ac operated relays).

Electrical data:

Minimum insulation resistance:

Initial: 100 megohms.

After life or environmental test: 50 megohms.

Dielectric strength:

Sea level, 2-5 seconds:

	Initial		After life tests	
	28 V dc	115 V ac	28 V dc	115 V ac
Coil to case	1,250	1,500	1,000	1,125
Aux contacts	1,250	1,500	1,000	1,125
All other points	1,250	1,500	1,000	1,125

Dielectric strength (altitude): 1 minute.

	28 V dc	115 V ac
Coil to case	500	500
Aux contacts	500	500
All other points	500	500

Environmental characteristics:

Temperature range: -70°C to + 71°C.

Maximum altitude rating: 80,000 ft.

MS24184M

Shock g-level: 25 g's.

Duration: 6-9 ms.

Maximum duration contact opening: 2 ms.

Vibration - sinusoidal: See table IV.

Acceleration: 15 g's.

Part or Identifying Number (PIN): MS24184- (plus applicable dash number from table I).

Qualification by similarity: See MIL-PRF-6101.

TABLE I. PIN and general characteristics.

<u>1/</u> <u>2/</u> Part number MS24184-	Type	Coil type	Terminal type	Mounting or mating socket	Auxiliary contacts	Maximum weight in pounds
D1	I	dc	Stud	Flange	No	2.4
D2	I	dc	Stud	Flange	Yes	2.5

1/ MS24184-A1 has been canceled without replacement.

2/ The term Part or Identifying Number (PIN) is equivalent to the former term MS dash number.

TABLE II. Rated contact load (amperes per pole) case grounded. 1/

Type of load	Life operat ing cycles x 10 ³	28 V dc				115 V ac, 1 phase				See appro- priate notes
		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	50	300		5	5	300		5		
Inductive	50	100		5	5			5		
Motor	50	250				150				
Lamp				.75	.75			.75		
Transfer load										<u>3/</u>
Mechanical life reduced current	100	75		1.25	1.25	75		1.25		
Mixed loads	50	10	Applicable per MIL-PRF-6106							

1/ Absence of value means parameter is not applicable to this specification sheet.

2/ Off time for motor load shall be 6 seconds minimum.

3/ Transfer load indicates relay is suitable for transfer between unsynchronized ac power supplies at the rating indicated.

MS24184M

TABLE III. Operating characteristics.

PIN MS 24184-	Coil data										Time - milliseconds maximum						
	Coil	Rated			Max		Max pick-up voltage			Hold voltage ^{2/}	Drop out voltage ^{2/}	Oper-ate ^{3/}	Rel-ease ^{4/}	Bounce ^{3/}			
		Volts ^{1/}	Freq Hz	Ω Res +15% -10	Volts	Amp	Normal ^{2/}	High temp test	Cont current test					Main		Aux	
														NO	NC	NO	NC
D1	X1,X2	28	dc	52	29	0.6	18	21	22.5	7.0	1.0	40	15	4.0	---	---	---
D2	X1,X2	28	dc	52	29	0.6	18	21	22.5	7.0	1.0	40	15	4.0	---	5.0	5.0

^{1/} CAUTION: Use of any coil voltage less than rated coil voltage will compromise the operation of the relay.

^{2/} Over the temperature range.

^{3/} With rated coil voltage.

^{4/} From rated coil voltage.

TABLE IV. Vibration levels (sinusoidal).

PIN MS24184-	5-10 Hz	10-55 Hz	55-250 Hz	250-500 Hz	500-1,500 Hz
D1	.08 DA	.06 DA	8 g's	4 g's	3 g's
D2	.08 DA	.06 DA	8 g's	4 g's	3 g's

Custodians:
NAVY - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-1206-12)

Review activities:
Navy - EC