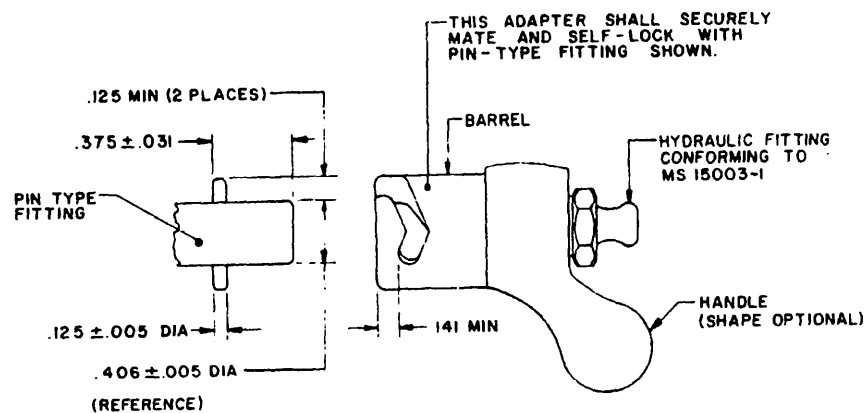


FED. SUP CLASS  
4930

## NOTES

1. Dimensions are in inches.
2. Material: Barrel and handle - steel.
3. Heat treatment: Case harden barrel to a depth of not less than .005 inch.
4. Finish for material that is not corrosion resistant shall be in accordance with QQ-P-416, Class 2, Type II, or QQ-Z-325, Type II, Class 2.
5. Reference documents shall be of the issue in effect on date of invitations for bid or request for proposal.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(B) ENTIRE STANDARD REVISED

P. A. ARMY-ME Other Cust NAVY-YD AIR FORCE-99	TITLE Adapter, grease gun coupling; hydraulic type inlet fitting, pin type nozzle	MILITARY STANDARD MS 24204
PROCUREMENT SPECIFICATIONS MIL-L-4387	SUPERSEDES:	PAGE 1 OF 1

DD FORM 672-1  
1 SEP 57

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

4930-0275

User activities:  
Army - AT  
Navy - SH, MCReview activity:  
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 27 JULY 1954 REVISED (A) 29 AUGUST 1966 (B) 21 APRIL 1977