


FED. SUP CLASS
6/50

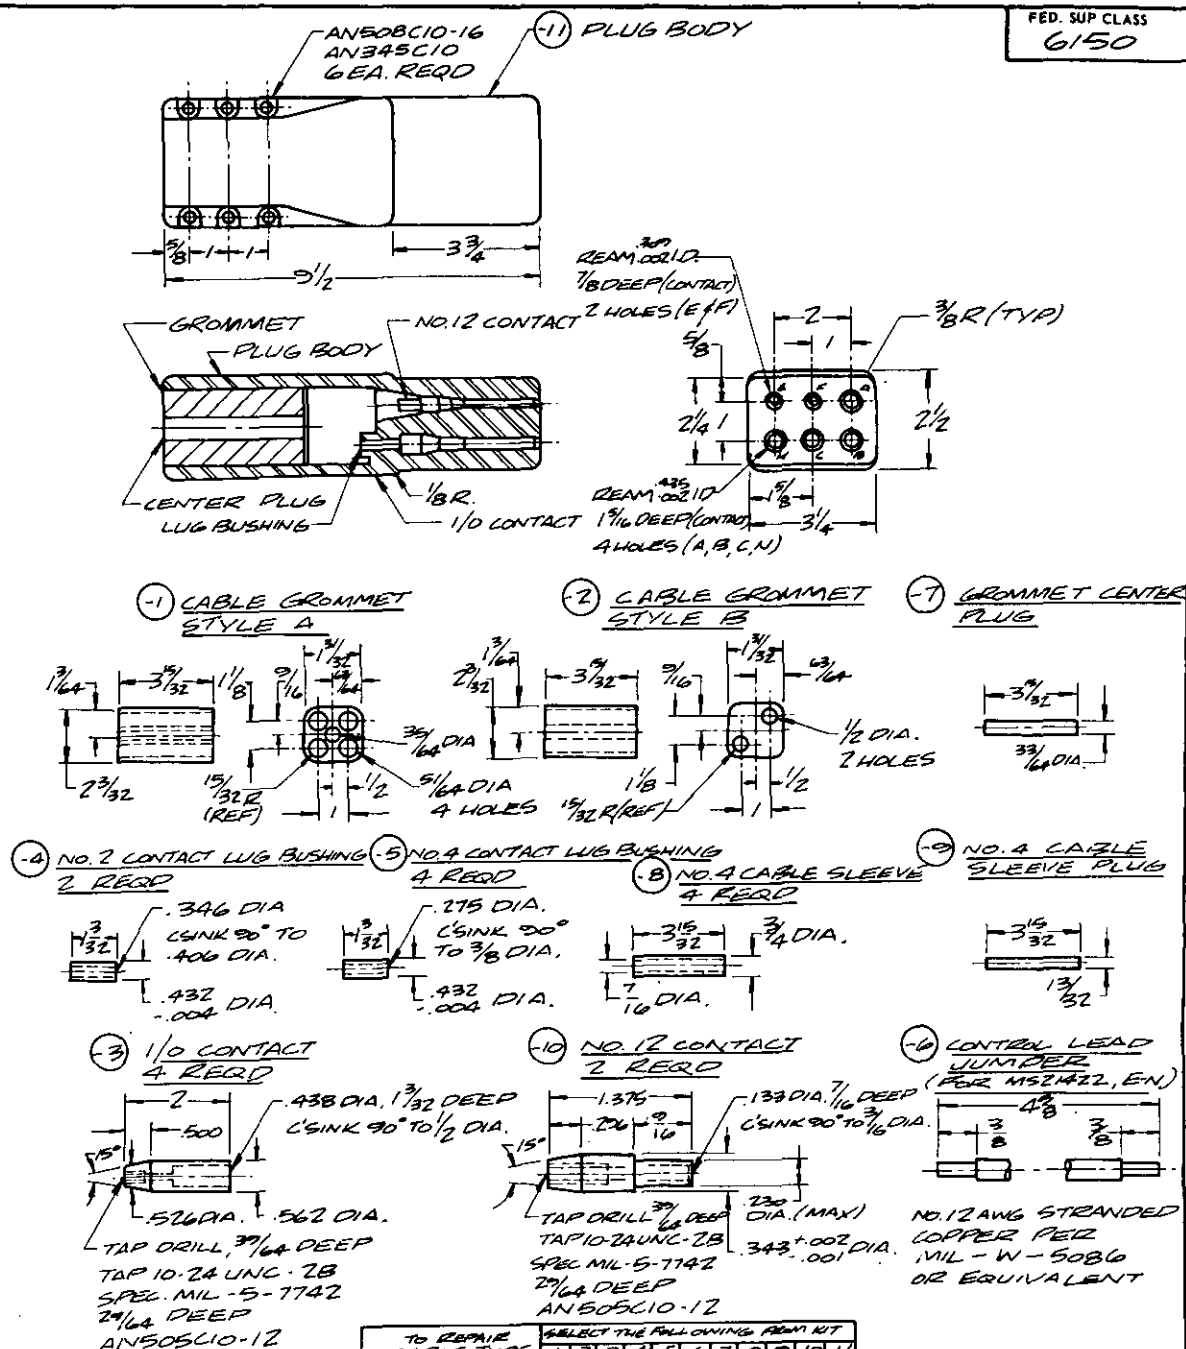

Material: Parts: MS24249-3,-4,-5, and -10 tellurium copper or brass with .0002 minimum silver plate (same material and finish as spec. requirements for socket contacts).

Part: MS24249-1,-2,-7,-8,-9, and
-11 Fungus-resistant rubber
Spec. MIL-I-3930 or
Butadiene-acrylonitrile type
(same as spec. requirements for plug body)

Each kit contains in addition to items given in table, one copy of MS24249 or equivalent.
Dimensions in inches, unless otherwise specified, tolerances: Fractions + 1/64, Decimals + .01 and +.005
Provision for securing grommet in plug body to be provided

This standard takes precedence over documents referenced herein
Referenced documents shall be the issue in effect on date of invitations to bid
This standard has been approved by the department of the Air Force and is
mandatory for use by that department.

TO REPAIR CABLE TYPE	SELECT THE FOLLOWING FROM KIT									
	-1-	-2-	-3-	-4-	-5-	-6-	-7-	-8-	-9-	-10-
AN330-1A-2A-5-7										2
AN330-3-6-6			2				1			2
MS2422-1-2-3-4			1	2		1				1
MS2422-5-6-7-8		1		2			1	2	2	1
MS2422B		1		4		4		4		2
MS2423		1	1	4	2	4	1	1	4	2

① CANCELLED

P. A. 99 Other Cust		INTERNATIONAL INTEREST	TITLE PARTS KIT, ELECTRICAL CABLE - PLUG	mandatory for use by that department	MILITARY STANDARD MS MS24249 (USAF)
PROCUREMENT SPECIFICATION MIL-C-1974		SUPERSEDES:		SHEET OF	

This military standard is approved by the Department of the Army and shall be used by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 18 APR 80
REVISED (A) 30 JUN 83