


2-611

NOTICE: These Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatever, and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any way licensing the holder or any other person or corporation, or conveying any rights or protection in manufacture, use, or sell any patented invention that may in any way be related thereto.

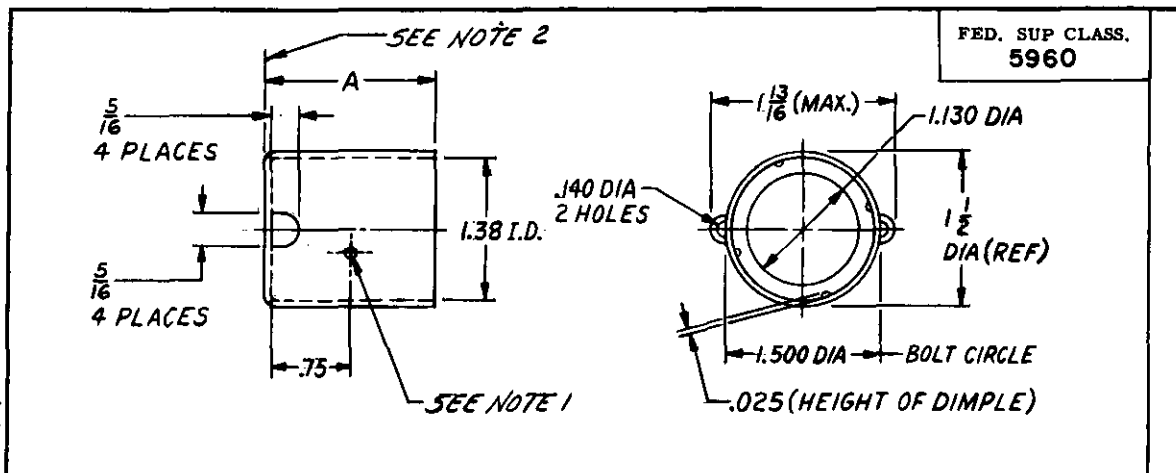

MS PART NO.	$\pm 1/16$	WEIGHT GRAMS MAX.	SOCKET NOT FURNISHED
MS24271-4	1	13.3	MIL-S-12883/1
MS24271-2	1 5/8	21.9	MIL-S-12883/1

Material: Aluminum per WW-T-789, Condition T6

Finish: Anodize per MIL-A-8625 and Henderlube 502A8 or equal

Dimensions in inches. Unless otherwise specified, tolerances: fractions $\pm 1/64$, decimals $\pm .005$, and $\pm .01$

- NOTES:
- 3 DIMPLES .093 DIA. AND 1 DIMPLE .115 DIA.
DIMPLES SHALL BE EQUALLY SPACED TO EACH OTHER WITHIN $\pm .005$
1/4 DIA. APPROX. AREA TO BE CLEAR OF FINISH ON CONVEX SIDE
OF LARGE DIMPLE ONLY.
 - SURFACE INDICATED TO BE CLEAR OF FINISH

**ⓑ CANCELED AFTER 17 JULY 1967
USE MIL-S-24251/8**

This standard takes precedence over documents referenced herein.

Referenced documents shall be the issue in effect on date of invitations for bid.

This standard has been approved by the department of the Air Force and is mandatory for use by that department. All other military activities are required to employ this standard where suitable.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS24271 (USAF)
Air Force--//	A - N - AF -		
Procurement Specification MIL-S-9372		RETAINER, ELECTRICAL SHIELD-BASE, ELECTRON TUBE, HEAT DISSIPATING, OCTAL, TS	SHEET OF

APPROVED 10 MAR 60 REVISED (A) 8 JUN 61 (B) 17 JULY 1967