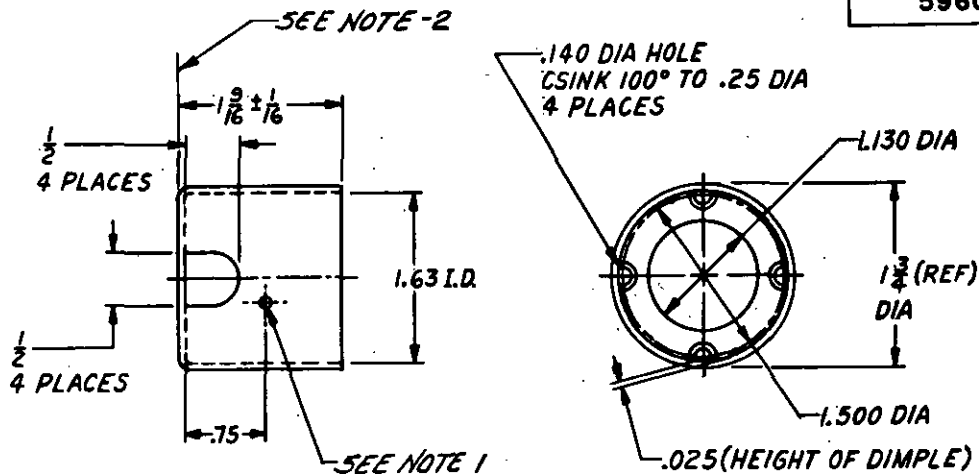


FED. SUP CLASS.
5960

| MS PART NO. | WEIGHT GRAMS MAX. | SOCKET NOT FURNISHED |
|-------------|-------------------------|----------------------|
| MS24273-1 | 25.2 | MIL-S-12883/1 |

Material: Aluminum per. WW-T-789, Condition T6

Finish: Anodize per MIL-A-8625 and Henderlube 502A8 or equal

Dimensions in inches. Unless otherwise specified, tolerances: fractions $\pm 1/64$, decimals $\pm .005$ and $\pm .01$

- NOTES:
- 3 DIMPLES .093 DIA. AND 1 DIMPLE .115 DIA.
DIMPLES SHALL BE EQUALLY SPACED TO EACH OTHER WITHIN $\pm .005$.
1/4 DIA. APPROX. AREA TO BE CLEAR OF FINISH ON CONVEX SIDE
OF LARGE DIMPLE ONLY.
 - SURFACE INDICATED TO BE CLEAR OF FINISH.

ⓑ CANCELED AFTER 17 JULY 1967
USE MIL-S-24251/10

This standard takes precedence over documents referenced herein.

Referenced documents shall be the issue in effect on date of invitations for bid.

This standard has been approved by the department of the Air Force and is mandatory for use by that department. All other military activities are required to employ this standard where suitable.

| | | | |
|---|----------------------------------|--|-------------------|
| CUSTODIANS Air Force-11 | OTHER INT. A - N - AF - | MILITARY STANDARD | MS24273 (USAF) |
| | | RETAINER, ELECTRICAL SHIELD-BASE ELECTRON TUBE, HEAT DISSIPATING, OCTAL T11 | |
| Procurement Specification MIL-S-9372 | | SUPERSEDES: | SHEET 1 OF 1 |