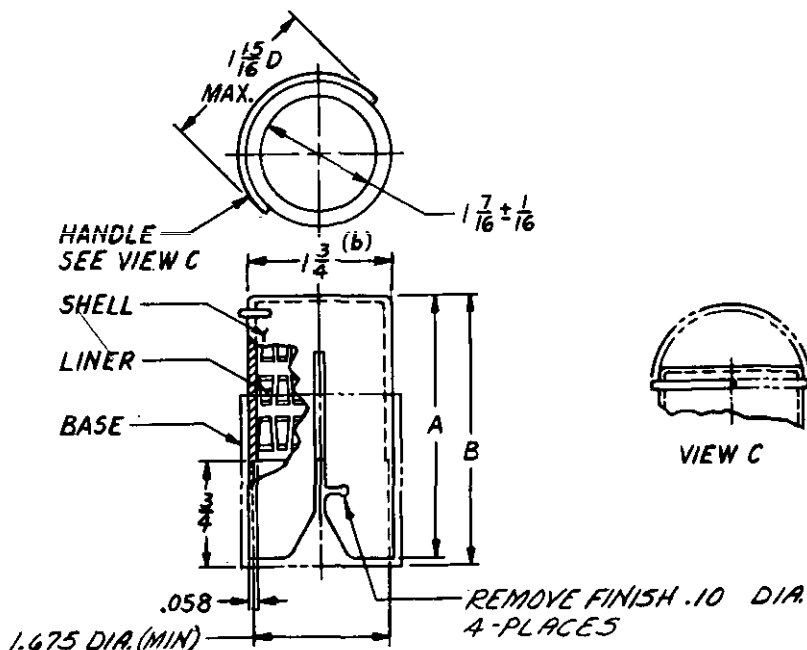


FED. SUP CLASS.
5960

MS PART NO.	A ± 1/16	B MAX.	WEIGHT GRAMS MAX.	TUBE ENVELOPE STYLE T12 (a)	USE WITH RETAINER
				LENGTH	
MS24276-1	2 1/4	2 5/8	37	2 1/2	MS24277-2 ONLY
MS24276-2	2 1/2	2 7/8	41	2 3/4	
MS24276-3	2 3/4	3 1/8	47	3	
MS24276-4	3	3 3/8	51	3 1/4	
MS24276-5	3 1/4	3 5/8	54	3 1/2	
MS24276-6	3 1/2	3 7/8	60	3 3/4	
MS24276-7	4	4 3/8	70	4 1/4	
MS24276-8	4 1/2	4 7/8	79	4 3/4	

(a) For reference purpose only

Material: Handle; Beryllium Copper Wire Spec. QQ-C-530
 Liner; Beryllium Copper Spec. QQ-C-533
 Shell; Aluminum Spec. WW-1-789

Heat treatment: Liner; Heat treat full hard

Finish: Handle; Chemical oxide Spec. MIL-F-495 and Henderlube 502A8 or equal
 Liner; Chemical oxide Spec. MIL-F-495 and Henderlube 502A8 or equal
 Shell; Anodize Spec. MIL-A-8625 and Henderlube 502A8 or equal

Dimensions in inches. Unless otherwise specified, tolerances: fractions ±1/64, decimals ±.005 and ±.01

Installation force shall not exceed 20 lbs to install shield over tube. No tool required for application or removal of shield from tube and mounting base. Top end of shield open. Engaging torque: 20 pound inches max.

(b) Out-Of-Round resulting from slotting and forming shall not be cause for rejection.

This shield fits tube types with bases max. dia 1.690 such as B8-86, B8-98, B-6-100 and B5-101.

This standard takes precedence over documents referenced herein.

Referenced documents shall be the issue in effect on date of invitations for bid.

This standard has been approved by the department of the Air Force and is mandatory for use by that department. All other military activities are required to employ this standard

CANCELED AFTER 17 JULY 1967 USE MIL-S-24251/13

CUSTODIANS	OTHER INT.	MILITARY STANDARD	
		SHIELD, ELECTRON-TUBE-HEAT DISSIPATING, FOR OCTAL T12 TYPE TUBES	
Air Force - 11	A - N - AF -	MS24276 (USAF)	
Procurement Specification MIL-S-9372		SHEET 1 OF 1	