


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, and any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder in any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

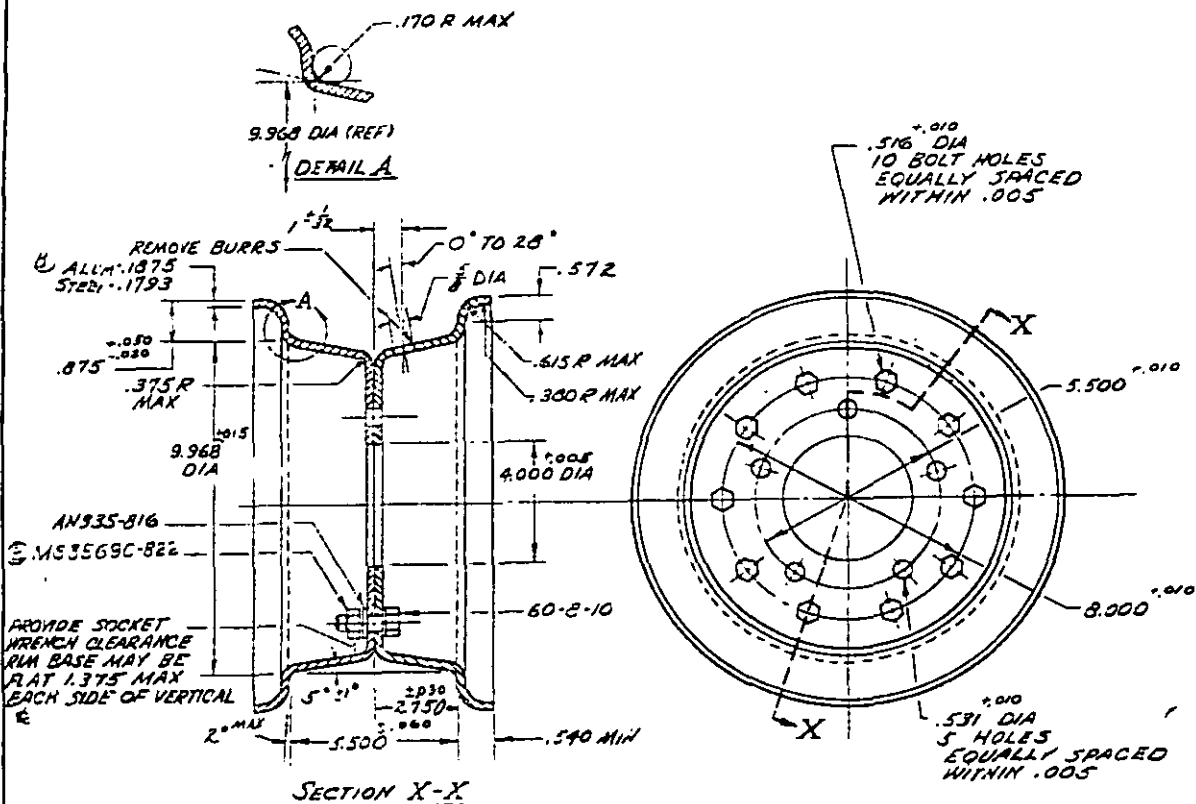

THIS SHALL BE A DEMOUNTABLE TYPE WHEEL WHICH CAN BE REMOVED FROM THE HUB WITHOUT DEFLATING THE TIRE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, FRACTIONS ± 1/64.

MS PART NO.	MATERIAL
MS 24326 - 1	STEEL
MS 24326 - 2	ALUMINUM ALLOY

(A) FEDERAL ITEM IDENTIFICATION NO.

SHALL FIT HUBS, MS 24328 & MS 24330, EXCEPT 9.00-10 SIZE USED ONLY WITH MS 24328. SEE MS 24322.

NOTE:

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

PA. MEM.	OTHER INT.	MILITARY STANDARD	MS24326
OTHER CUST.	ARMY-GMC		
DOCS	NAVY-WEP		
ORD.	SEA	WHEEL FOR 750-10 & 900-10 TIRES	
PROCUREMENT SPECIFICATION	MC		
MIL-W-8005		SUPERSEDES:	SHEET / OF /