


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL
CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION
LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-25427

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND
AGENCIES OF THE DEPARTMENT OF DEFENSE.

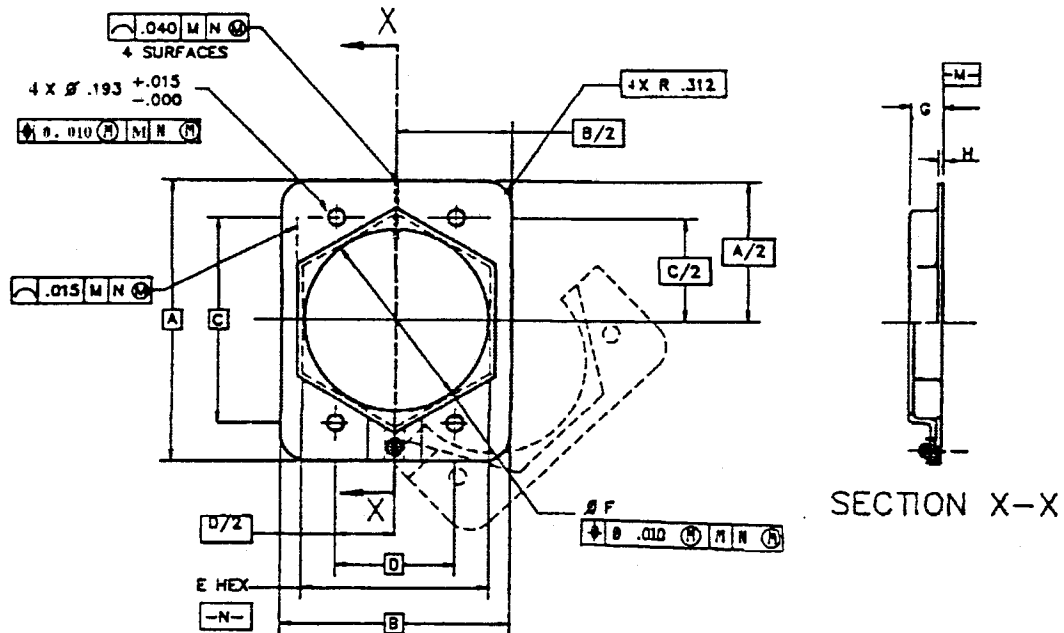

DASH NO.	EQUIV TUBE DIA	A +.000 -.010	B +.000 -.020	C ± .010	D ± .010	E +.010 -.000	F +.000 -.010	G +.000 -.016	H ± .015
4	.250	2.250	1.625	1.516	.876	1.130	1.090	.250	.060
6	.375	2.500	1.812	1.732	1.000	1.380	1.340	.250	.060
8	.500	2.750	1.938	1.948	1.126	1.642	1.602	.250	.060
10	.625	2.750	2.125	1.948	1.126	1.642	1.602	.250	.060
12	.750	3.000	2.375	2.162	1.250	1.892	1.852	.312	.060
16	1.000	3.250	2.625	2.380	1.376	2.146	2.106	.312	.060
20	1.250	4.125	3.250	2.938	1.750	2.772	2.482	.312	.060

EXAMPLE OF PART NUMBER: MS24335-8- .500 INCH TO BE FLANGE

MATERIAL: SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

DIMENSIONS IN INCHES. PER ANSI Y14.5M-1982

FLANGE FOR USE WITH STANDARDS MS24333 AND MS 24334

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

Revision letters are not used to denote changes due to the extensiveness of the changes.

PREPARING ACTIVITY: USAF - 82

CUSTODIANS: ARMY. NAVY. AS

AIR FORCE - 99 DLA - CS

REVIEWER:

PROJECT NUMBER: 4730-0045

MILITARY SPECIFICATION SHEET

TITLE
FLANGE, BULKHEAD
MOUNTING, HYDRAULIC, SELF-
SEALING COUPLING

SPECIFICATION SHEET NUMBER

MS24335 Rev C 15 AUG 94

SUPERSEDING

MS24335 Rev B, 10 May 68

AMSC N/A

FSC - 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution unlimited.

Page 1 of 1