


THE REQUIREMENTS FOR ACQUIRING THE PRODUCTION DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE ODSS SPECIFIED IN THE SOLICITATION: MIL-N-25161

THIS SPECIFICATION IS APPROVED FOR USE BY the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

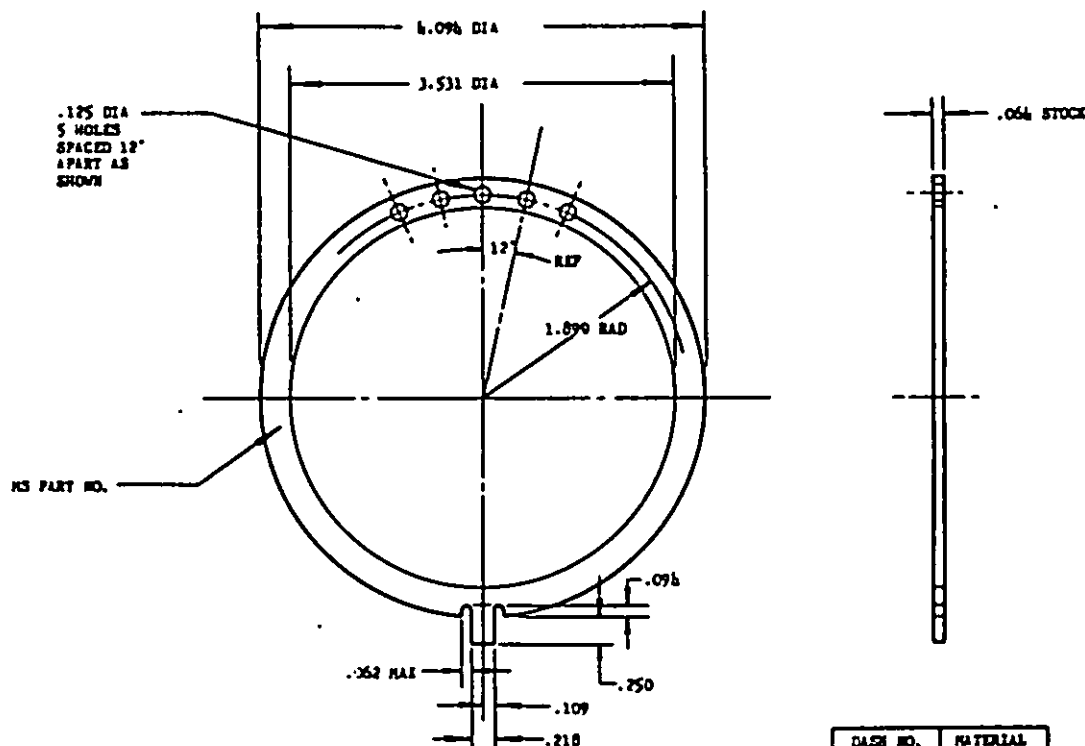

DASH NO.	MATERIAL
-1	ALUMINUM
-2	CRCS

- (B) MATERIAL: ALUMINUM, SPECIFICATION QQ-A-250/1 PLATE, SHEET, STRIP, AND FOIL; NONFERROUS BASE METAL, CORROSION RESISTANT STEEL, SPEC MIL-S-5059 COMP 304 ANNEALED. REMOVE ALL BURRS AND BREAK SHARP EDGES .016 MAX DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS  $\pm .010$ , ANGLES  $\pm 2^\circ$ . THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

- (B) Denotes changes

PREPARING ACTIVITY: USAF-82 CUSTODIAN: ARMY- NAVY- AIR FORCE-99 DLA- REVIEW: USER: PROJECT NUMBER: 1680-0551	MILITARY SPECIFICATION SHEET TITLE <b>RING, LOCK FLIGHT PRESSURE REFUELING NOZZLE</b>	SPECIFICATION SHEET NUMBER <b>MS24360B 01 Feb 1994</b> SUPERSEDING <b>MS24360A 11 APR 60</b> NASC: N/A REC: 1680
DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.		Page 1 of 1