


Ⓐ This military standard is approved by the OQAMA, Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

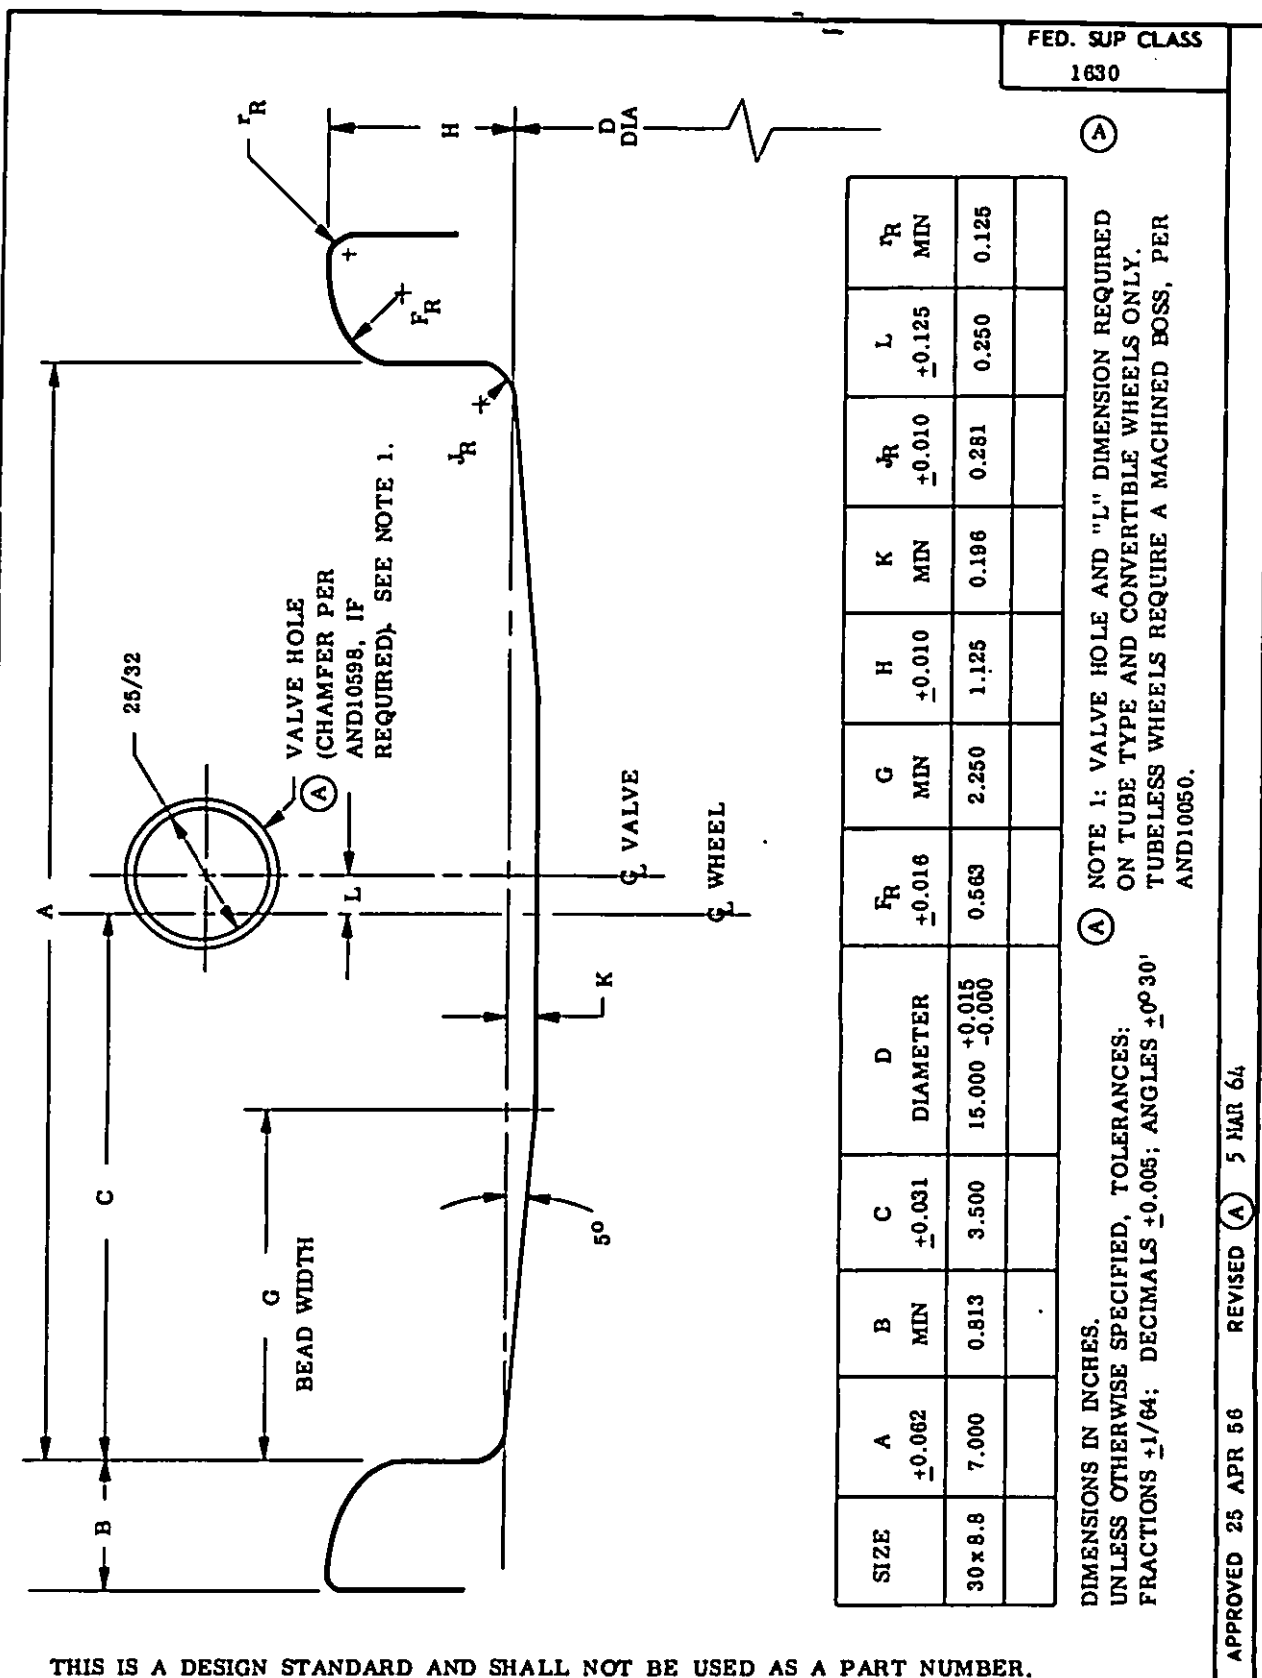

SIZE	A +0.082	B MIN	C +0.031	D DIAMETER	F <sub>R</sub> +0.016	G MIN	H +0.010	K MIN	φ <sub>R</sub> +0.010	L +0.125	r <sub>R</sub> MIN
30 x 8.8	7.000	0.813	3.500	15.000 +0.015 -0.000	0.563	2.250	1.125	0.196	0.281	0.250	0.125

DIMENSIONS IN INCHES.  
UNLESS OTHERWISE SPECIFIED, TOLERANCES:  
FRACTIONS +1/64; DECIMALS +0.005; ANGLES +0°30'

Ⓐ NOTE 1: VALVE HOLE AND "L" DIMENSION REQUIRED ON TUBE TYPE AND CONVERTIBLE WHEELS ONLY. TUBELESS WHEELS REQUIRE A MACHINED BOSS, PER AND10050.

FED. SUP CLASS  
1630

APPROVED 25 APR 56 REVISED (A) 5 MAR 64