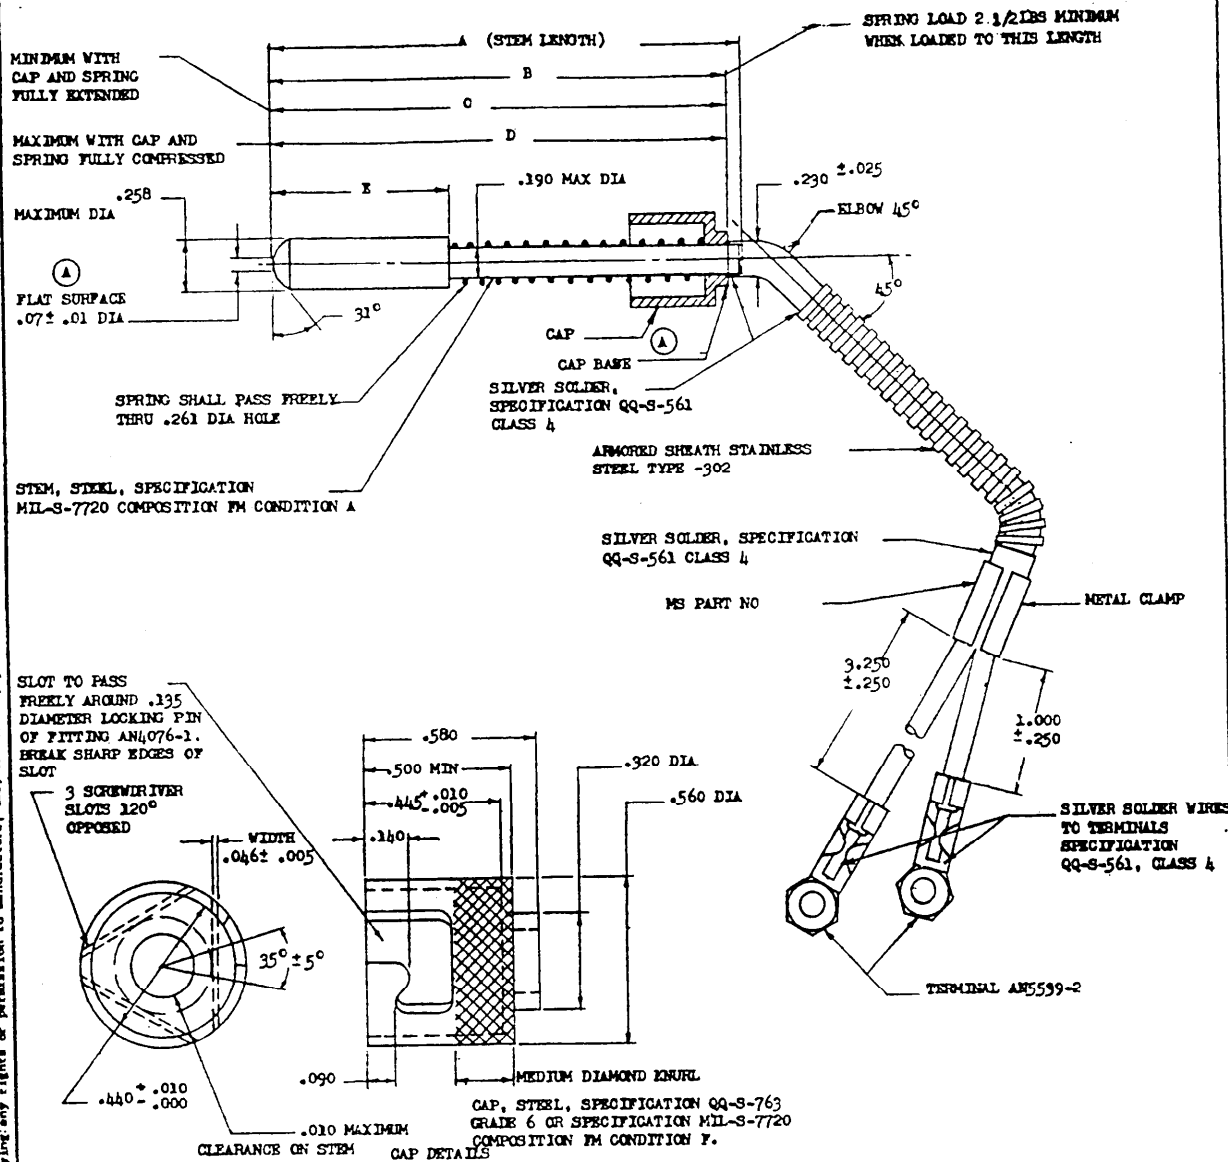


FED. SUP CLASS.
6620

MS PART NO	FIN	A	B	C	D	E
MS24482-1		2.850 ± .030	2.50	2.62	1.78	1.00 MAX
MS24482-2		2.203 ± .016	2.00	2.06	1.63	0.76 MAX

OVERALL LENGTH: 15.00 ± .50 FROM TIP OF BULB TO DISCONNECT ASSEMBLY ON LONGEST LEAD.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: TWO PLACE DECIMALS ± .02,
THREE PLACE DECIMALS ± .010, ANGLES 1°.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS
Navy - BuAer
Air Force

OTHER INT.
A -
N -
AF -

MILITARY STANDARD

TRANSMITTER; TEMPERATURE, ELECTRICAL RESISTANCE, ARMORED, BAYONET
LOCKING TYPE. (-50° to 300°C)

MS24482(USAF)

PROCUREMENT SPECIFICATION
MIL-T-25446

SUPERSEDES:

SHEET 1 OF 1