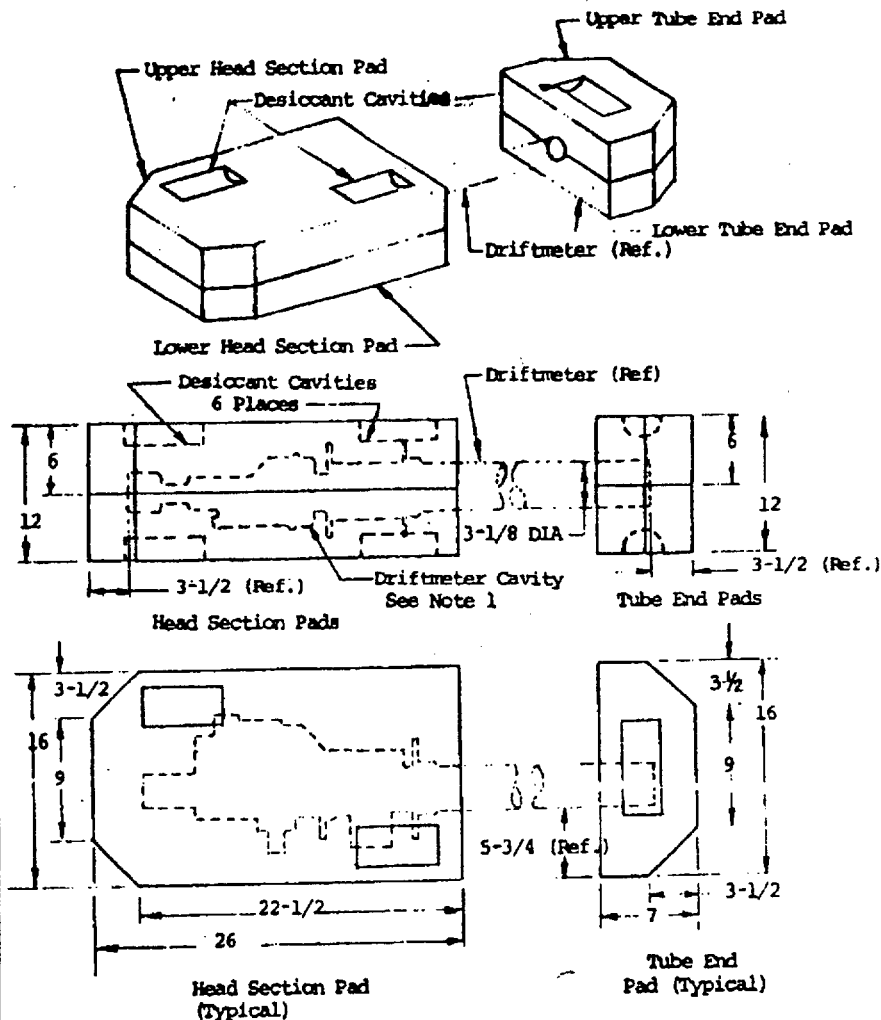


FED. SUP CLASS
8135

NOTES: (A)

1. Cavity to conform to the configuration of the driftmeter head section (MS28012) Ref.
2. Desiccant cavities to be located to avoid interference with driftmeter cavity.
3. Dimensions in inches unless otherwise specified.
4. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
5. Referenced documents shall be of the issue in effect on date of invitations for bid.

(A) Redrawn

(B) CANCELLED - No superseding standard.

This standard has been approved by the Packaging Evaluation Agency (PEA), Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard when suitable.

P.A.	TITLE	MILITARY STANDARD
Air Force - 69 Other Cost	Packaging Cushion Pad B-3 & B-6A Driftmeter	MS24485(USAF)
Procurement Specification NONE	SUPERSEDES: MS 24486 (USAF)	SHEET 1 OF 1

APPROVED 4 2 5 1 5 1 REVISED (A) 1 DEC TO (B) 7 APR 87