



Ⓑ

CANCELLED 1 JUNE 1975

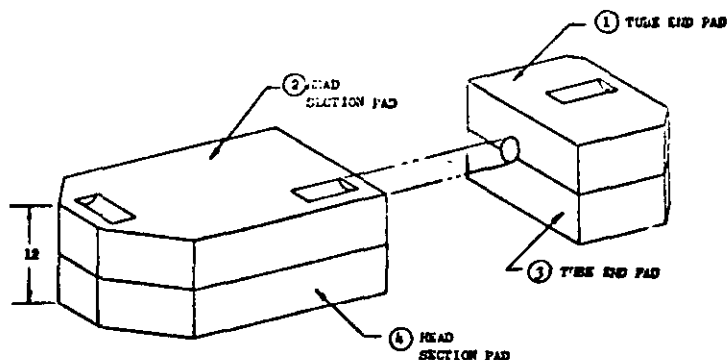


**(B)**


CANCELLED 1 JUNE 1975 USE MS24485




② HEAD SECTION PAD

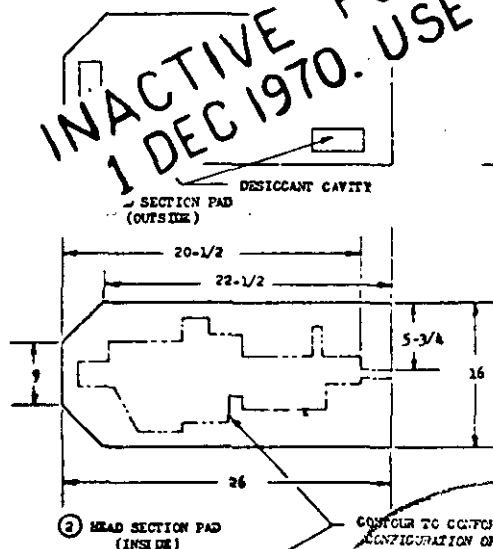


② HEAD SECTION PAD  
(INSIDE)




③ TUBE END PAD  
(OUTSIDE)



① TUBE END PA  
(INSIDE)




④ HEAD SECTION PAD  
(INSIDE)




④ HEAD SECTION FAD  
(OUTSIDE)


② HEAD SECTION PAD



INACTIVE FOR DESIGN A  
1 DEC 1970. USE MS24485



DESICCANT CAVITY



16  
5-3/8  
3-1/2  
9

CONTROL TO CONFORM TO THE  
CONFIGURATION OF THE  
DRIFTMETER HEAD SECTION  
H3(AK5763) REF.

50102: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as an assumption by the Government of any right or permission to manufacture, or to attempt to manufacture, or to attempt to use, or in any way may be related thereto.

APPROVED & SIGNED 57 REVISED A 1 DEC 70 B 1 June 1975

CUSTODIANS		OTHER INT.	MILITARY STANDARD		MS24486 (USAF)
Air Force - 69		A - N - AF -	PACKAGING CUSHION PAD - B-3 DRIPTRONER		
PROCUREMENT SPECIFICATION MIL-P-7106			SUPERSEDES:		SHEET 1 OF 1