


NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation in carrying any right or permission to manufacture use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bufileps (Department of the Navy) and the Department of the USAF, and is mandatory for use by their activity. All other military activities are required to comply with this standard where suitable.

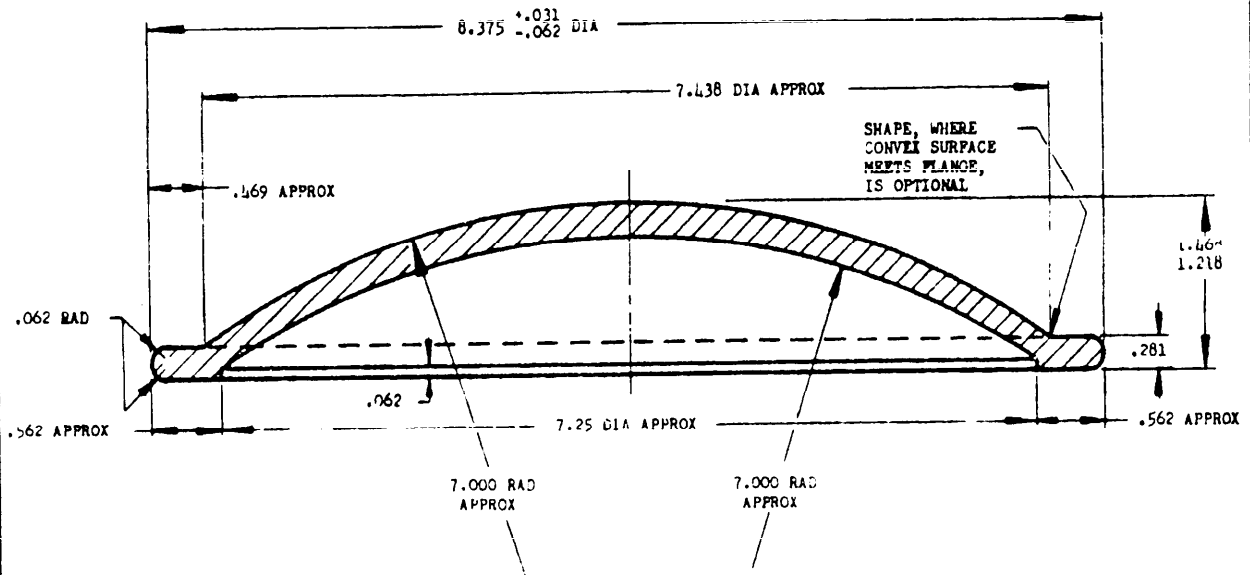

| DASH NO. | COLOR |
|----------|--------|
| -1 | RED |
| -2 | GREEN |
| -3 | BLUE |
| -4 | YELLOW |

MATERIAL: CLASS P IN ACCORDANCE WITH MIL-C-7949 EXCEPT TEMPERED TO WITHSTAND THE FOLLOWING TEMPERATURE SHOCK TEST: SAMPLES SHALL BE HEATED IN AN OVEN AT 150° ±2°C FOR 1 HOUR AND THEN IMMEDIATELY IMMERSED FOR 1 MINUTE IN WATER AT 0° TO 5°C.

COLORS: TYPE I, GRADE A, IN ACCORDANCE WITH MIL-C-25450 FOR RED, GREEN, AND YELLOW FILTERS AND TYPE I, GRADE B, IN ACCORDANCE WITH MIL-C-25050 FOR BLUE FILTERS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS 1.031.

MS DRAWING NUMBER AND MANUFACTURER'S IDENTIFICATION TO BE MARKED ON BOTTOM OF FLANGE.

(D) THIS STANDARD CONVERTED FROM MS24489(USAF) TO MS24489(ASG).

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

| | | |
|---|--|-------------------|
| P.A. USAF Other Cust Navy - Neps | TITLE FILTER, MARKER LIGHT, AIRPORT APPROACH, GLASS | MILITARY STANDARD |
| | | MS24489(ASG) |
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES: | SHEET 1 OF 1 |