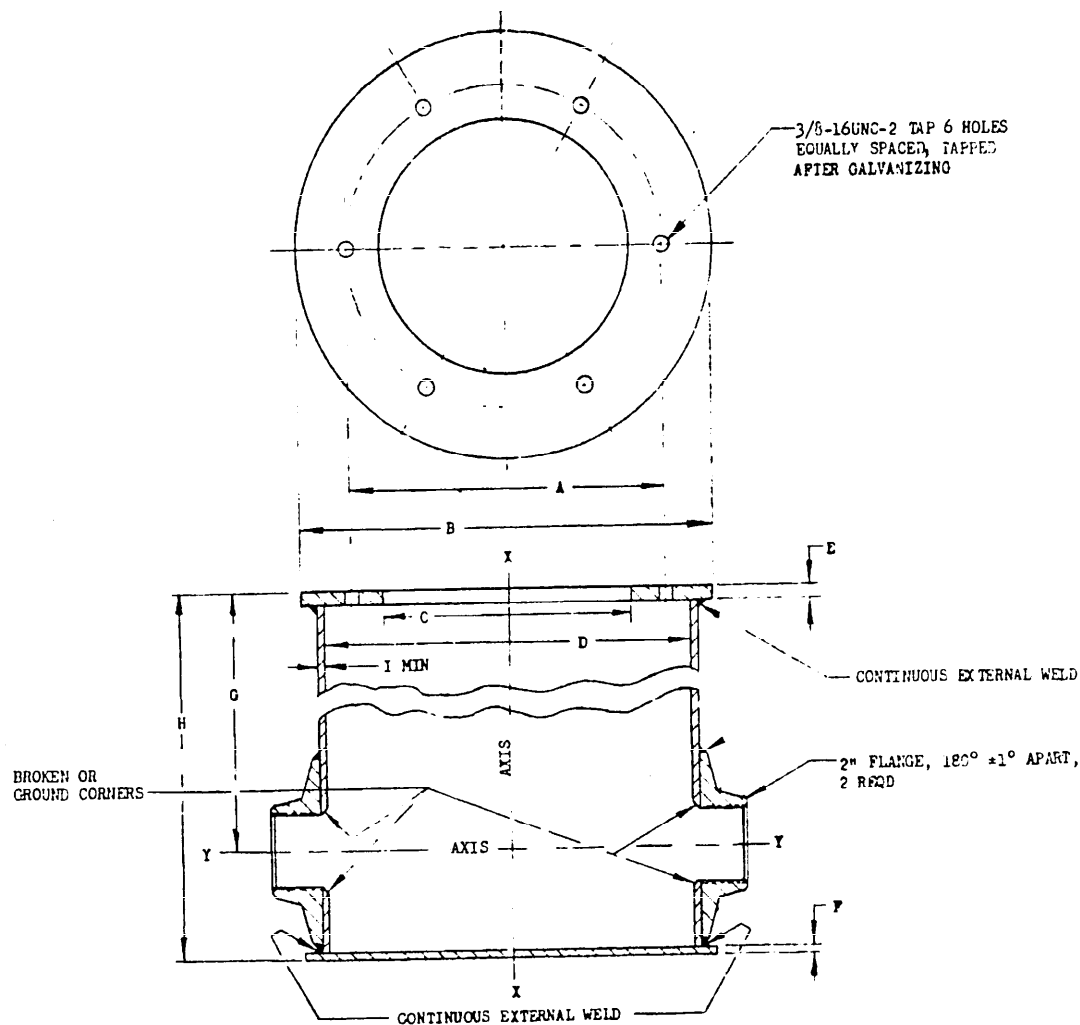


FED. SUP CLASS  
6210

DASH NO.	A ±.01 DIA	B +.10 -.00 DIA	C +.06 -.00 DIA	D MIN ID	E MIN	F MIN THICK	G +.00 -.12	H ±.25 HEIGHT	I MIN THICK
-1	10.250	13.500	8.000	12.375	.375	.109	-	16.000	.109
-2	10.250	13.500	8.000	12.375	.375	.109	-	20.500	.109
-3	10.250	13.500	8.000	12.375	.375	.109	-	20.500	.109
-4	10.250	13.500	8.000	12.375	.367	.109	17.500	20.000	.109
-5	14.250	17.375	12.375	16.250	.367	.109	17.500	20.000	.109

-1 AND -2 INACTIVE FOR NEW DESIGN AFTER 3 APRIL 1963.  
-3 INACTIVE FOR NEW DESIGN AFTER 20 MAY 1965.

-3 AND -2 BASES ARE UNIVERSALLY, FUNCTIONALLY AND DIMENSIONALLY INTERCHANGEABLE. -3 AND -1 BASES ARE FUNCTIONALLY INTERCHANGEABLE. -2 HAS ±.10 TOLERANCE ON THE TANK FLANGE LOCATION, WHILE -3 HAS ±1 TOLERANCE.  
-4 SUPERSEDES AND IS FUNCTIONALLY INTERCHANGEABLE WITH -2 AND -3.

MINIMUM MARKING: MS PART NO. AND MANUFACTURERS NAME, ABBREVIATION, OR TRADE MARK.

DIMENSIONS IN INCHES.

(D) ENTIRE STANDARD REVISED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. USAP - 11 Other Cust Navy - WP	TITLE  BASE, AIRPORT MARKER LIGHT	MILITARY STANDARD  MS24526(ASG)
PROCUREMENT SPECIFICATION MIL-B-8954	SUPERSEDES: AN2509	SHEET 1 OF 1

This standard has been approved by the Department of the Air Force (11) and the Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Review activities:  
USAF - 11  
Navy - WP

APPROVED 31 JUL 58 REVISED (A) 15 MAY 59 (B) 12 AUG 59 (C) 3 APR 63 (D) 20 MAY 65