



DIALS SHOWN FOR REFERENCE ONLY  
SEE PROCUREMENT SPECIFICATION  
FOR DETAIL REQUIREMENTS

MUST BE SYMMETRICAL  
ABOUT  $\pm .031$

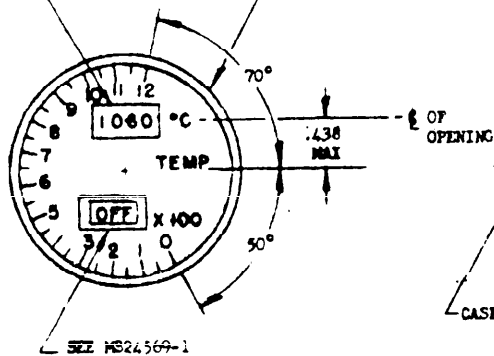

ELECTRICAL RECEPTACLE IN ACCORDANCE WITH MS33678C-18-9P  
LOCATE ON VERTICAL AND HORIZONTAL CENTERLINE  
POLARIZING PIN SHALL BE LOCATED AT TOP CENTER OF RECEPTACLE

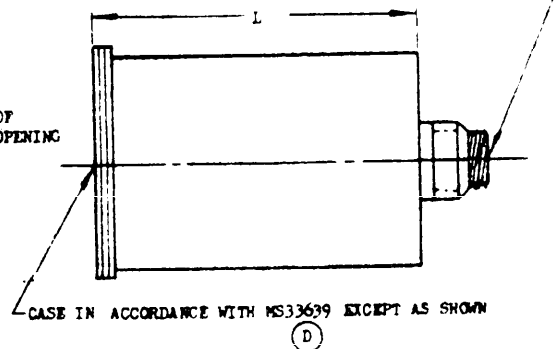

DASH NO.	APPROXIMATE SCALE LENGTH DEGREES	$\pm .250$
-1	270	5.750
-2	360	6.250
-3	240	6.250

BREAK SHARP EDGES APPROX .010 RAD.  
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS  $\pm .016$ .

THE "OFF" WARNING SHALL BE LOCATED WITHIN THE AREA DEFINED.  
THE NUMERAL 4 MAY BE OMITTED FROM THE -3 DIAL.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. USAF - 11	TITLE	MILITARY STANDARD
Other Cus: Navy - 11	INDICATOR, TEMPERATURE - THERMOCOUPLE, SELF BALANCING POTENTIOMETER TYPE	MS24569(ASG)
PROCUREMENT SPECIFICATION NIL-2-27209(ASG)	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (limited coordination)

PREVIOUS EDITIONS OF THIS SPEC ARE OBSOLETE

This standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by those activities. All other military activities are required to employ this standard where suitable.

USAF - 11  
Navy - 11  
Review activities

APPROVED 79 Jan 60 REVISED A 13 Feb 51 B 15 Aug 61 C 15 Nov 65 D 18 Feb 66