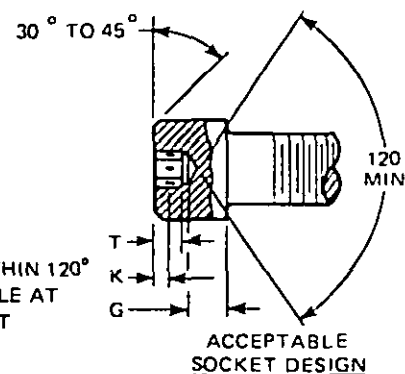
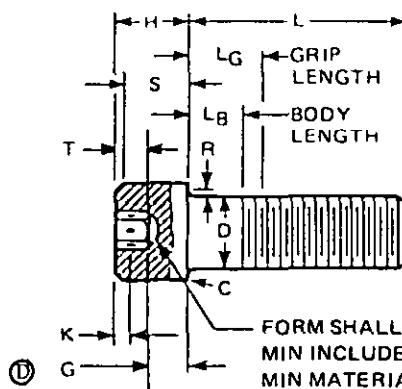



FED. SUP CLASS

5305

FOR NUMBER OF HOLES
SEE NOTE 8

USER ACTIVITIES:

Army - AT, ME
Navy - AS, SH

REVIEWER ACTIVITIES:

Army - MI
Navy - MC
Air Force - 11
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Nominal size			#6 (.138)	#8 (.164)	#10 (.190)	#14 (.250)
Threads per inch (UNC-3A)			32	32	24	20
D	Body diameter	Max	0.1380	0.1640	0.1900	0.2500
		Min	0.1329	0.1585	0.1840	0.2435
A	Head diameter	Max	0.226	0.270	0.312	0.375
		Min	0.218	0.262	0.303	0.365
H	Head height	Max	0.138	0.164	0.190	0.250
		Min	0.134	0.159	0.185	0.244
S	Head side height	Min	0.124	0.148	0.171	0.225
J	Socket width across flats	Max	0.1111	0.1426	0.1587	0.1900
		Min	0.1094	0.1406	0.1562	0.1875
T	Key engagement	Min	0.064	0.077	0.090	0.120
G	Wall thickness	Min	0.047	0.056	0.065	0.095
C	Chamfer or radius	Max	0.005	0.005	0.005	0.008
		Min	0.010	0.012	0.014	0.014
R	Fillet extension	Max	0.006	0.007	0.009	0.009
		Min	0.050	0.060	0.065	0.085
K	Hole location	Max	0.035	0.040	0.045	0.065
		Min	0.039	0.050	0.050	0.050
L	Hole diameter	Max	0.033	0.044	0.044	0.044
		Min	0.028	0.040	0.040	0.040
..	Tensile strength, lbs	Max	0.020	0.032	0.032	0.032
		Min	0.025	0.030	0.030	0.030

L Length	Tolerance	Dash no.	LG Max	LG Min	Dash no.	LG Max	LG Min	Dash no.	LG Max	LG Min	Dash no.	LG Max	LG Min
0.250		-1			-6						-21		
0.375		-2			-7						-22		
0.500	+0.00	-3			-8			-13			-23		
0.625	-0.03	-4			-9			-14			-24		
0.750		-5			-10			-15			-25		
0.875					-11			-16			-26		
1.000					-12			-17			-27		
1.250								-18	0.38	0.17			
1.500	+0.00							-19	0.38	0.17	-28	0.50	0.25
1.750	-0.04							-20			-29	0.50	0.25
2.000											-30	1.00	0.75

For NOTES see SHEET 3.

© denotes changes

P.A.	OS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	AR 99		SCREW, CAP, SOCKET HEAD, HEXAGON, DRILLED CORROSION-RESISTING STEEL (UNC-3A)	MS 24674
Procurement Specification	FF-S-86	SUPERSEDES:		SHEET 1 OF 3

9 November 1984

15 March 1976

7 July 1975

27 January 1961

7 April 1960

APPROVED

FED. SUP CLASS
5305

Nominal size			5/16 (.3125)	3/8 (.375)	1/2 (.500)	5/8 (.625)							
Threads per inch (UNC-3A)			18	16	13	11							
D	Body diameter	Max	0.3125	0.3750	0.5000	0.6250							
		Min	0.3053	0.3678	0.4919	0.6163							
A	Head diameter	Max	0.469	0.562	0.750	0.938							
		Min	0.457	0.550	0.735	0.921							
H	Head height	Max	0.312	0.375	0.500	0.625							
		Min	0.306	0.368	0.492	0.616							
S	Head side height	Min	0.281	0.337	0.450	0.562							
J	Socket width across flats	Max	0.2530	0.3160	0.3790	0.5050							
		Min	0.2500	0.3125	0.3750	0.5000							
T	Key engagement	Min	0.151	0.182	0.245	0.307							
G	Wall thickness	Min	0.119	0.143	0.190	0.238							
C	Chamfer or radius	Max	0.008	0.008	0.010	0.010							
R	Fillet extension	Max	0.017	0.020	0.026	0.032							
		Min	0.012	0.015	0.020	0.024							
K	Hole location	Max	0.104	0.123	0.160	0.198							
		Min	0.084	0.103	0.140	0.178							
I	Hole diameter	Max	0.050	0.067	0.067	0.067							
		Min	0.044	0.061	0.061	0.061							
	Recommended wire diameter	Max	0.040	0.057	0.057	0.057							
		Min	0.032	0.045	0.045	0.045							
.	Alignment plug diameter		0.030	0.051	0.051	0.051							
..	Tensile strength, lbs	Min	4,200	6,200	11,400	18,000							
L Length	Tolerance	Dash no.	L _G Max	L _B Min	Dash no.	L _G Max	L _B Min	Dash no.	L _G Max	L _B Min	Dash no.	L _G Max	L _B Min
0.375	+0.00 -0.03	-31											
0.500		-32			-43								
0.625		-33			-44								
0.750		-34			-45			-54					
0.875		-35			-46			-55					
1.000	+0.00 -0.04	-36			-47			-56			-65		
1.250		-37			-48			-57			-66		
1.500		-38			-49			-58			-67		
1.750		-39	0.62	0.35	-50	0.50	0.19	-59			-68		
2.000		-40	0.62	0.35	-51	0.50	0.19	-60			-69		
2.250		-41	1.12	0.85	-52	1.00	0.69	-61	0.75	0.36	-70		
2.500		-42	1.12	0.85	-53	1.00	0.69	-62	0.75	0.36	-71	0.75	0.30
2.750		+0.00 -0.08						-63	0.75	0.36	-72	0.75	0.30
3.000							-64	1.50	1.12	-73	0.75	0.30	

For NOTES see SHEET 3.

APPROVED 7 April 1960 REVISED ① 1-or changes see sheet 1.

P.A.	OS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	AR		SCREW, CAP, SOCKET HEAD, HEXAGON, DRILLED CORROSION- RESISTING STEEL (UNC-3A)	MS 24674
Procurement Specification	99	SUPERSEDES:		SHEET 2 OF 3

NOTES:

1. MATERIAL: Austenitic corrosion-resisting steel in accordance with FF-S-86.
2. PROTECTIVE COATING: Passivate in accordance with QQ-P-35.
3. MECHANICAL PROPERTIES: Screws shall meet the mechanical property requirements of FF-S-86 as well as the magnetic permeability requirements specified in Note 4.
4. MAGNETIC PERMEABILITY: Screws shall have a magnetic permeability of 2.0 MAX (Air = 1.0) for a field strength of H = 200 oersteds, using a magnetic indicator conforming to MIL-I-17214, or equivalent.
5. THREADS: Threads shall be in accordance with MIL-S-7742.
6. THREAD LENGTH: Screws above heavy line shall have complete (full form) threads extending within two threads of the head as measured with a thread ring gage.
7. HEAD: Head may or may not be knurled at manufacturer's option. Type of knurling optional. Diameter of knurled head shall not exceed the maximum head diameter specified.
8. DRILLED HOLE DATA:
 - (a) Screw #6 (.138) shall have one (1) hole drilled through the head. Screws #8 (.164) and larger shall have three (3) holes drilled through the head.
 - (b) On Screw #6 (.138) the drilled hole shall be centered as close as practicable on the flat of the hexagon socket. On Screws #8 (.164) and larger the drilled holes shall be within the flats on the hexagon socket and shall not break the corners of the hexagon socket.
 - (c) Edges of the holes on the outside of the head shall be chamfered 45° by 0.010 to 0.020 deep.
- *9. ALIGNMENT PLUG: Plug shall pass completely through the head without deflection.
- **10. TENSILE STRENGTH: Based on 80,000 PSI minimum ultimate tensile strength. Load pounds calculated by the stress areas indicated in FED-STD-H28.
11. DIMENSIONS: Dimensions are in inches, unless otherwise specified.
12. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
Example: MS 24674-1 is the part number for a screw .138-32UNC-3A by 0.250 long of corrosion-resisting steel.
13. OTHER NOTES:
 - (a) Referenced documents shall be of the issue in effect on date of invitation for bids.
 - (b) For design feature purposes, this standard takes precedence over procurement documents referenced herein.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A.	OS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	AR		SCREW, CAP, SOCKET HEAD, HEXAGON, DRILLED CORROSION-RESISTING STEEL (UNC-3A)	MS 24674
Procurement Specification	FF-S-86	SUPERSEDES:		SHEET 3 OF 3