


FED. SUP CLASS  
5330

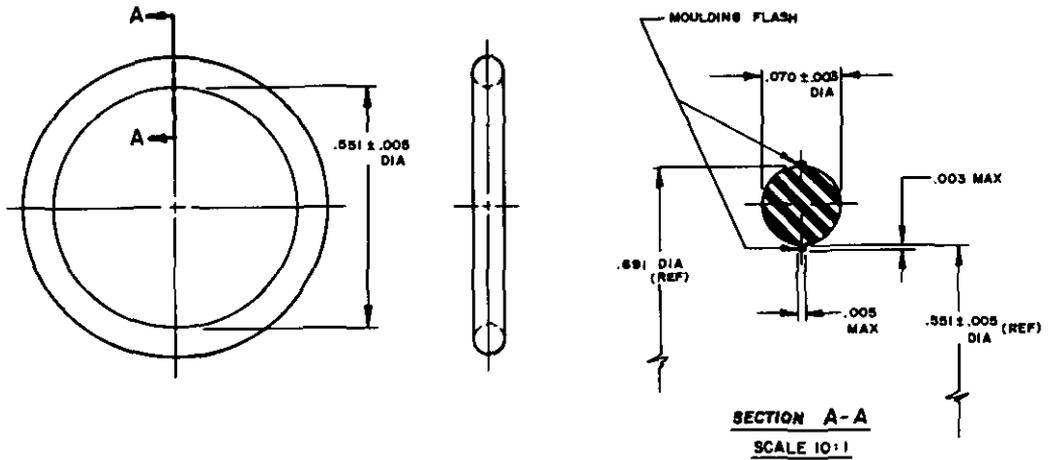

RINGS MAY BE OFF-REGISTER, DUE TO MOLD MISALIGNMENT, NOT TO EXCEED .003 INCH, PROVIDED ALL CROSS-SECTIONAL DIAMETERS, INCLUDING THE PROTRUSIONS (FLASH EXCLUDED) OF BOTH HALVES, WHERE APPLICABLE, SATISFY THE SPECIFIED CROSS-SECTION DIMENSION (.070 ± .003 DIA).

D CERTAIN PROVISIONS (DIMENSIONS AND TOLERANCES) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/27 AND STANAG 3444. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ±.010.

**E CANCELLED with no superseding standard**

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

NAVY - AS  
USAF - 69, 85

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This standard has been approved by the Department of the Air Force and the Department of the Navy and is mandatory for use by that activity.

All other military activities are required to employ this standard where suitable.

|   |                        |   |  |
|---|------------------------|---|--|
| P. A. USAF - 82<br>Other Cust<br>NAVY - AS<br>AF - 99   | INTERNATIONAL INTEREST | TITLE<br>PACKING, PREFORMED HIGH PRESSURE AIR VALVE | MILITARY STANDARD<br><b>MS 24690 (ASG)</b> |
| PROCUREMENT SPECIFICATION<br>MIL-P-25732 or MIL-P-83461 | SUPERSEDES: 47A1562    | SHEET   OF  |  |

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

APPROVED 25 OCT 60 REVISED (A) 13 JAN 61 (B) 22 OCT 64 (C) 15 NOV 66 (D) 1 JUNE 67 (E) 20 OCT 86