

INCH-POUND

MS24698A  
 14 July 2005  
 SUPERSEDING  
 MS24698  
 13 October 1960

## DETAIL SPECIFICATION SHEET


 RETAINER, CONNECTOR,  
 RACK AND PANEL, MINIATURE

Inactive for new design after 8 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26518.

The Qualified Products List (QPL) associated with this inactive for new design specification will be maintained until acquisition of the product is no longer required, where upon the specification and QPL will be canceled.

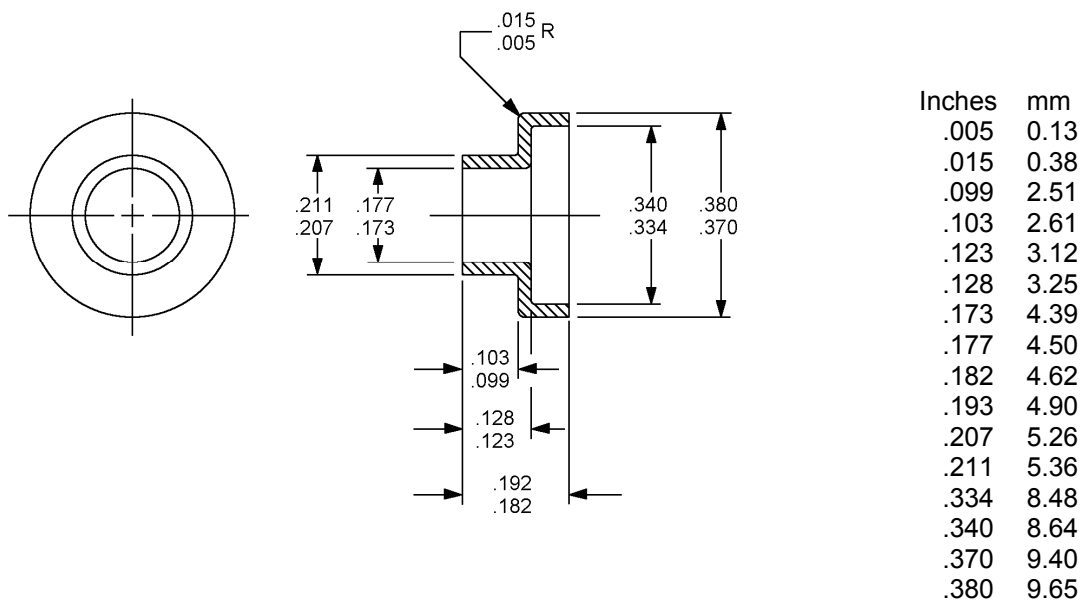

## NOTES:

1. All dimensions in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are  $+0.003 -0.000$  inches (0.08 mm). All diameters shall be concentric within  $.002$  inches (0.05 mm) T.I.R (total Indicated runout).

 FIGURE 1. Spring loaded mounting assembly.

MS24698A

REQUIREMENTS:

Dimensions and configuration see figure 1.

Material: Stainless steel type 303 in accordance with ASTM A582 UNS designator 530300.

Part or identifying number (PIN): MS24698-1

Referenced documents: In addition to MIL-DTL-26518 this document references the following:

ASTM A582

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:  
Air Force - 11  
DLA - CC

Preparing activity:  
DLA - CC

(Project 5935-4699-000)

Review activities:  
DLA - IS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.