
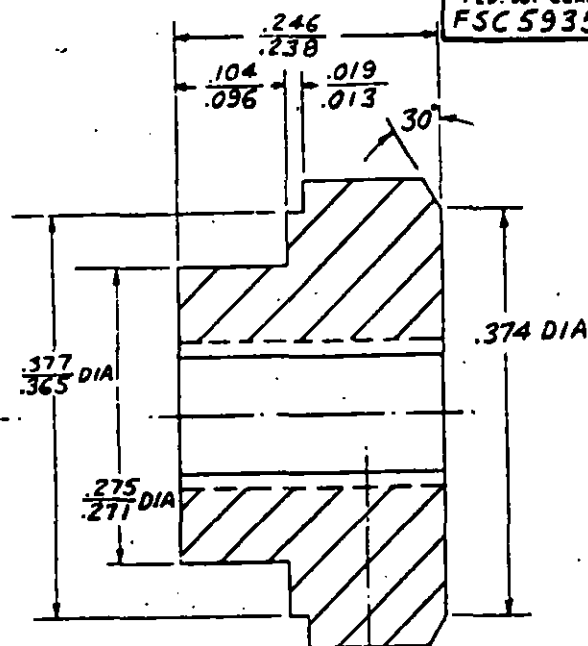


NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby grants its permission, and the fact that the Government may have furnished, furnished, or may be furnished, such data in any form, in any medium, or by any means, shall not be construed as an endorsement, approval, or recommendation of any product, process, or procedure, or as representing any opinion or permission to manufacture, use, or sell any product, process, or procedure, or as representing any opinion or permission to manufacture, use, or sell any product, process, or procedure, or as representing any opinion or permission to manufacture, use, or sell any product, process, or procedure.

This standard has been approved by the Department of the Air Force and is mandatory for use by all military activities and is required to comply with standard where applicable.

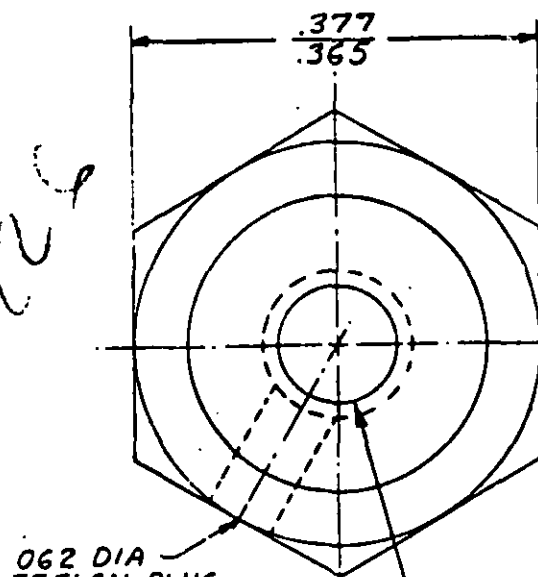

FED. SUP CLASS
FSC 5935

0.062 DIA
TEFLON PLUG
LOCATE APPROX
AS SHOWN

TAP DRILL THRU
TAP 6(.138)-32 UNC-28 Q OF PLUG
SPEC MIL-S-7742

(A)

MS PART NUMBER	MATERIAL
MS 24700-1	ALUMINUM ALLOY, SPEC QQ-A-267, TEMPER-T4
MS 24700-2	STAINLESS STEEL SPEC. QQ-S-763, TYPE 302

① MS24700-1 TO BE CADMIUM PLATED, SPEC. QQ-P-416 TYPE II, CLASS 3.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED,
TOLERANCES: DECIMALS ± 0.005 , ANGLES $\pm 2^\circ$.

ALL DIAMETERS TO BE CONCENTRIC WITH EACH OTHER WITHIN .002 T.I.R.

REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE
OF INVITATIONS FOR BID

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS
REFERENCED HEREIN

P.A. USAF Other Cont	TITLE BUSHING, FIXED, CONNECTOR, RACK AND PANEL, MINIATURE	MILITARY STANDARD MS24700(USAF)
PROCUREMENT SPECIFICATION MIL-C-26518	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.