

FED. SUP CLASS
5925


USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/revise information is current as of the date of this document. For future coordination of changes to this document, draft elimination should be based on the information in the current 00BSS."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

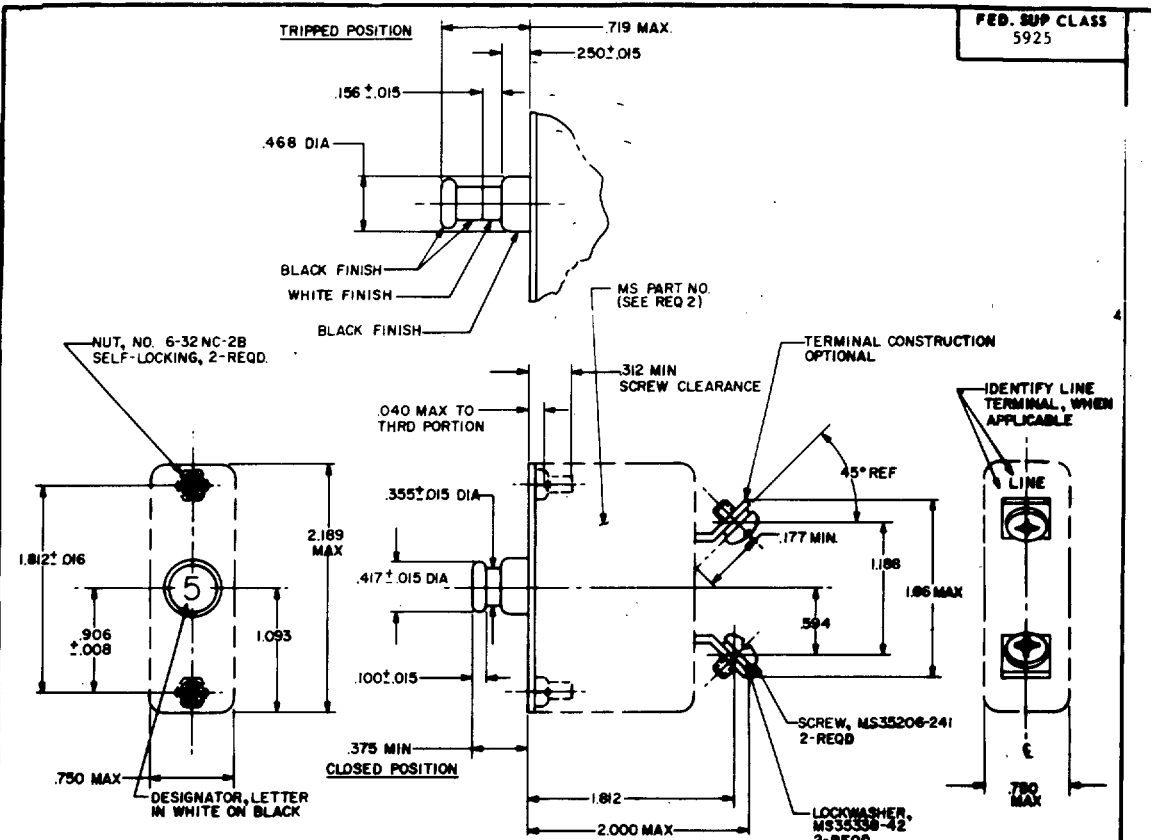

REQUIREMENTS:

- TRIP FREE REQUIREMENTS SHALL BE IN ACCORDANCE WITH MIL-C-5809.
- THE FOLLOWING ADDITIONAL NOTE SHALL BE STAMPED ON THE SIDE OF THE CIRCUIT CASE, "MAY BE USED IN PLACE OF MS25005 BREAKERS BUT MUST BE REPLACED WITH MS25017 BREAKERS."

NOTES:

- DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCE: DECIMALS $\pm .031$; ANGLES $\pm 2^\circ$.
- PHANTOM LINES INDICATE THAT CONTOUR IS OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED.
- MS 25017-5 THRU MS 25017-35 INACTIVE FOR NEW DESIGN AFTER 1 JUNE 1968. NO SUPERSEDING STANDARD. SEE TABLES I, II & III SHEET 2.
- IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THE STANDARD SHALL TAKE PRECEDENCE.
- VOLTAGE RATING: 28VDC NOMINAL OR 115V 400 HZ NOMINAL.

CERTAIN PROVISIONS OF THIS STANDARD ARE SUBJECT OF INTERNATIONAL AGREEMENT ASCC 12/3. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

J CANCELLED AFTER 30 NOV 87 SUPERSEDED BY MS25244-PT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

J DENOTES CHANGES

P.A. NAVY - AS Other Cust ARMY - ER USAF - 85	INTERNATIONAL INTEREST (SEE NOTE)	TITLE CIRCUIT BREAKER; TRIP-FREE, PUSH-PULL, 5 TO 50 AMP, TYPE I	MILITARY STANDARD
	PROCUREMENT SPECIFICATION MIL-C-5809	SUPERSEDES: MS25005	MS 25017
SHEET 1 OF 2			

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17709
PROJECT NO. 5925-0162

ENGINEERING SPECIFICATIONS
AND STANDARDS DEPARTMENT DATE

APPROVED 11 JULY 52 REVISED 30 NOV 1987