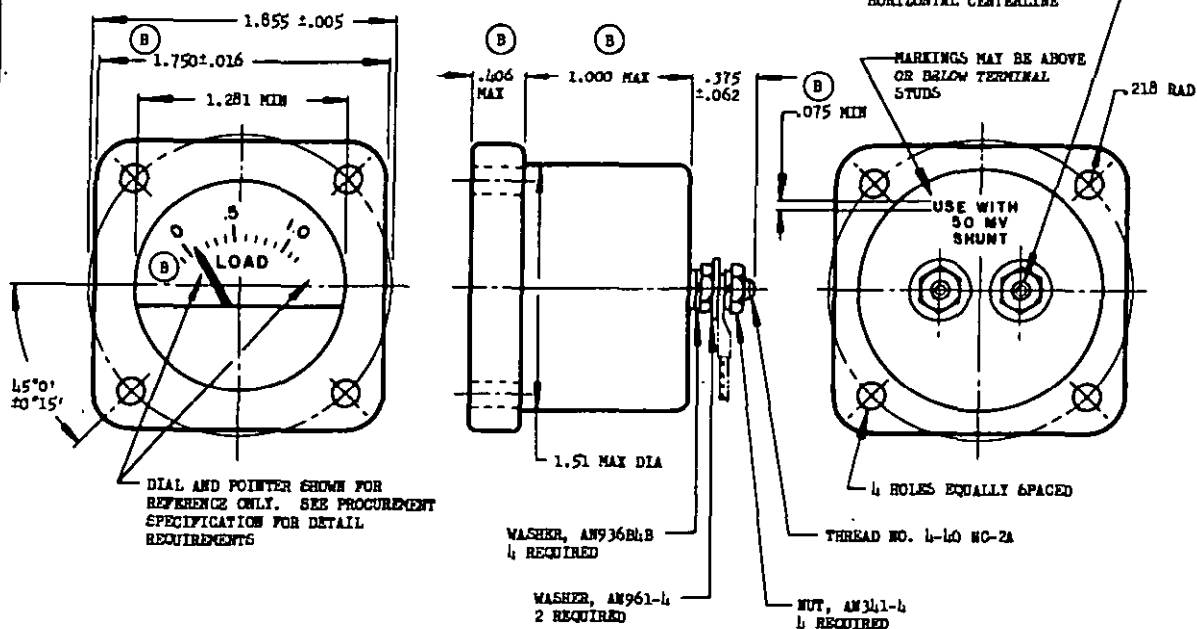


FED. SUP CLASS.  
1680

DASH NO.	FILE	MOUNTING NOT PROVISION	HOLE DIA
-1		NONE	.145 ± .002
-2		(B) WITH TINKERMAN PART NO. 08940-632-24 OR EQUAL	.145 ± .005 WITH NUT INSTALLED -.002

ZERO ADJUSTMENT NOT REQUIRED.  
 DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010.  
 THESE LOADMETERS TO BE USED WITH EXTERNAL SHUNTS IN ACCORDANCE WITH SPECIFICATION MIL-S-61.  
 ACCURACY ± 3 PER CENT.  
 THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.  
 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

CUSTODIANS Navy - BuAer Air Force	OTHER INT. A - N - AF -	MILITARY STANDARD		MS25025 (ASG)
		LOADMETER, DIRECT CURRENT, AIRCRAFT		
PROCUREMENT SPECIFICATION KIL-A-6752		SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1  
1 OCT 62

APPROVED 24 Dec 53 REVISED 4 23 May 56 7 Apr 58

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.