

PROJECT NO. 5985-0839-4

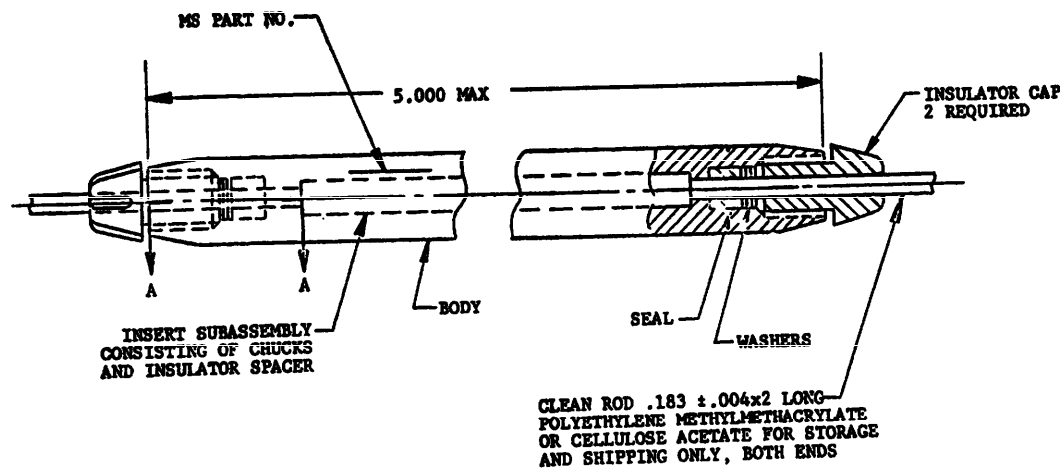
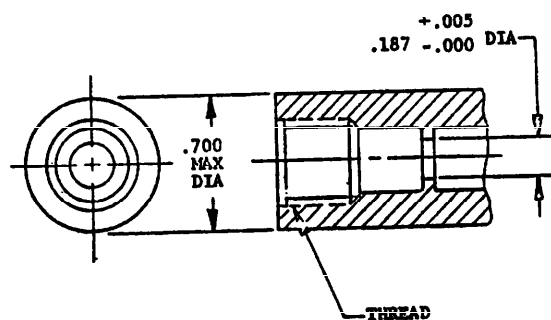
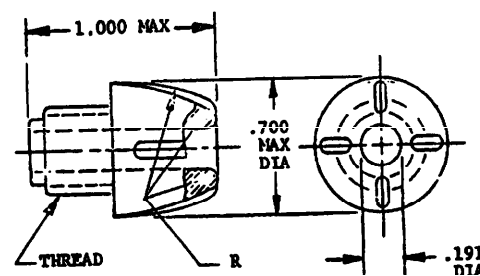
FED. SUP CLASS
5985

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for reutilization use shall be made from this document.

ASSEMBLYSECTION A-A
ENLARGEDCAP

MS PART NO.	CLASS
MS25052-1A	A
MS25052-1B	B

NOTES:

1. MATERIAL: SHALL BE SUITABLE FOR THE PURPOSE.
2. EXAMPLES OF PART NUMBERS: MS25052-1A = INSULATOR, STRAIN, ANTENNA, 7,500 VOLTS.
MS25052-1B = INSULATOR, STRAIN, ANTENNA, 10,000 VOLTS.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES $\pm .005$.
4. THREADS SHALL CONFORM TO MIL-S-7742.
5. MAXIMUM WEIGHT .13 POUND.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) REVISED

P.A. NAVY-AS Other Cust USAF - 85	TITLE INSULATOR, STRAIN, ANTENNA	MILITARY STANDARD	
		MS25052	
PROCUREMENT SPECIFICATION MIL-A-7965	SUPERSEDES: MS25052 (ASG)	SHEET 1	OF 1

DD FORM 672-1 (Coordinated)
1 MAR 72

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 39065

APPROVED 18 AUG 55 REVISED (A) 8 APR 66 (B) 18 JUNE 76