


FED SUP CLASS  
5985

USER SYMBOLS

REVIE ER SYMBOLS-

"Review/ear information is current as of the date of this document  
For future coordination of changes in this document draft circulation  
should be based on the information in the current 0001SS -"

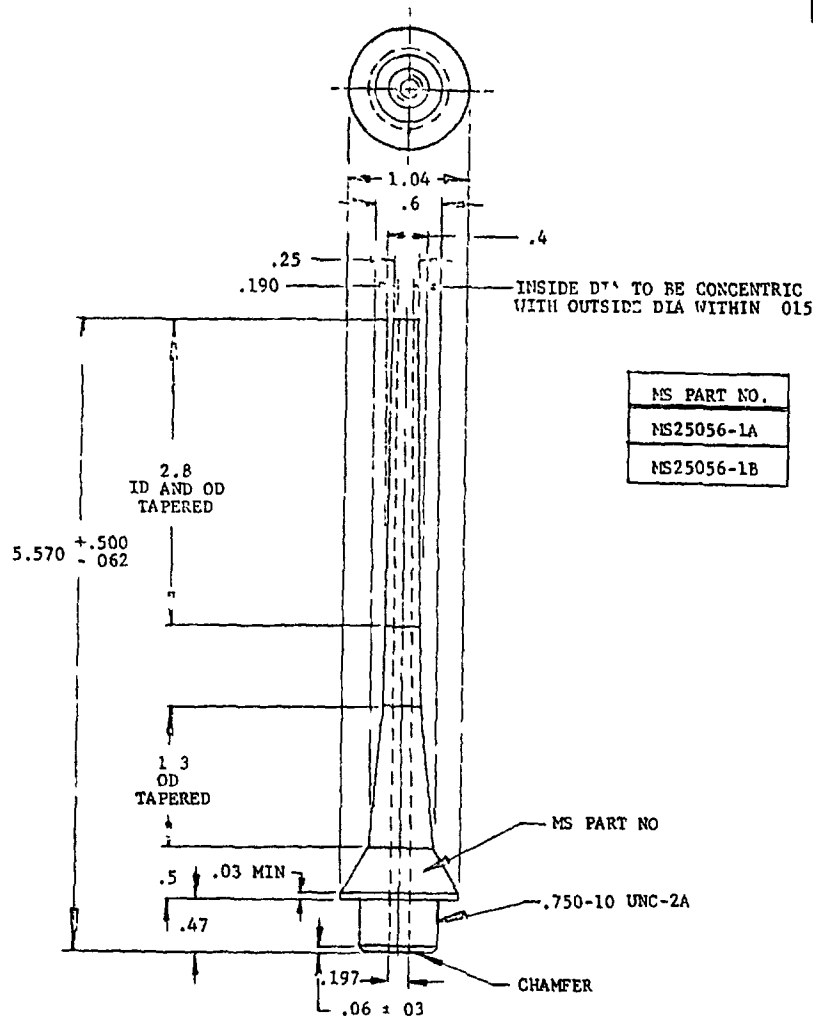

## NOTES:

1. MATERIAL DIELECTRIC MATERIAL MS25056-1A, L-P-390 TY II, CL "L", GRADE 7, MS25056-1B, L-P-390, TY III, CL "L", GRADE 6A
2. EXAMPLES OF PART NUMBERS MS25056-1A = SLEEVE, SUPPORT, ANTENNA EXTERNAL THREAD, 7,500 VOLTS.  
MS25056-1B = SLEEVE, SUPPORT, ANTENNA, EXTERNAL THREAD 10,000 VOLTS.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ONE-PLACE DECIMALS  $\pm .1$ , TWO-PLACE DECIMALS  $\pm .02$ , THREE-PLACE DECIMALS  $\pm .005$
4. THREADS SHALL CONFORM TO MIL-S-7742.
5. MAXIMUM WEIGHT .04 POUND

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) REVISED

P.A. NAVY - AS Other Cust	TITLE	MILITARY STANDARD	
USAF - 85	SLEEVE, SUPPORT, ANTENNA, EXTERNAL THREAD	MS25056	
PROCUREMENT SPECIFICATION MIL-A-7965	SUPERSEDES MS25056(ASG)	SHEET 1 OF 1	

DD FORM 672-1 (Coordinated)  
1 MAR 72

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 23865

APPROVED 18 AUG 55 REVISED (A) 18 JUNE 76

This military standard is approved for use by all Departments  
B. Agencies of the Department of Defense. Selection for all new  
engineering and design applications and for repetitive use shall  
be made from this document.