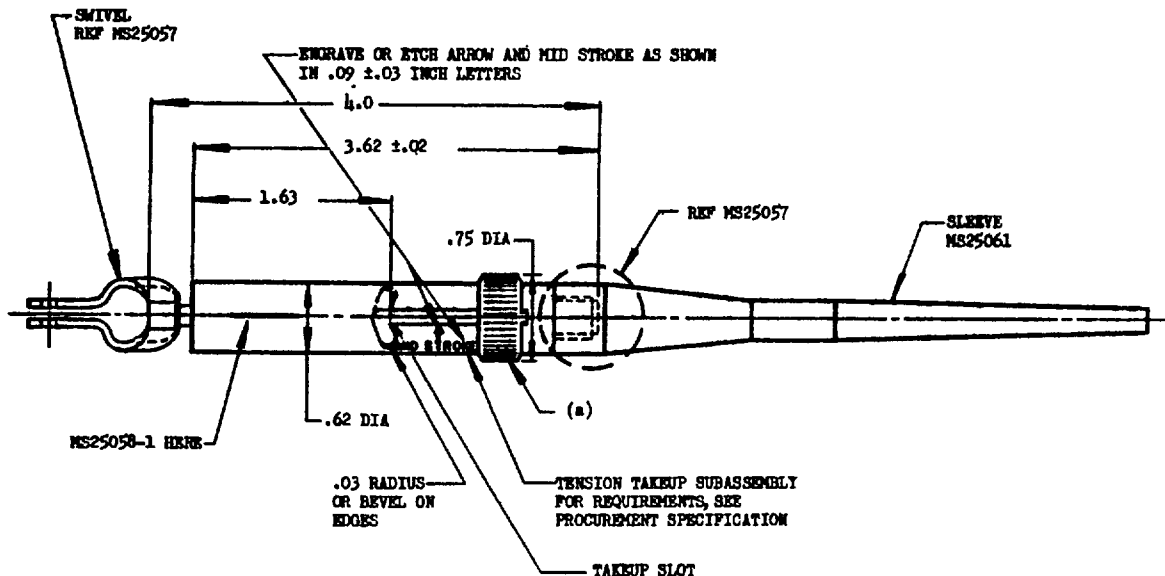


FED. SUP CLASS.  
5985

MS PART NO.	FIN
MS25058-1	

(a) DETENT MUST BE PROVIDED TO HOLD LOCKING RING IN FORWARD POSITION AGAINST MINIMUM 3 POUNDS, MAXIMUM 10 POUNDS DISMEMBERING FORCE.

MATERIAL: SOCKET AND TENSION TAKEUP BODY, CORROSION-RESISTANT STEEL, SPECIFICATION MIL-S-5059.  
BALL, TO CONFORM IN GENERAL WITH SPECIFICATION MIL-B-5687.  
SWIVEL, .06 STAINLESS STEEL, SPECIFICATION MIL-S-5059.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ONE-PLACE DECIMALS ±.1, TWO-PLACE DECIMALS ±.01, THREE-PLACE DECIMALS ±.005.

THREADS TO CONFORM TO SPECIFICATION MIL-S-7742.

MAXIMUM WEIGHT .26 POUND.

APPROVED 18 Aug 55 REVISED

CUSTOMERS  
Navy - BuAer  
Air Force

OTHER INT.  
A -  
N -  
AF -

MILITARY STANDARD

TAKEUP, TENSION, ANTENNA

MS25058  
(ASG)

PROCUREMENT SPECIFICATION  
MIL-A-7965

SUPPLEMENT: BUAEER DRAWING E-1795

SHEET 1 OF 1

NOTES: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.