


PROJECT NO. 6115-M307

FED. SUP CLASS  
6115

3 HOLES  $\frac{.202}{.192}$  DIA  $+ .006$  MAX. TAPER SPACED AS SHOWN. HOLES MUST BE WITHIN  $.005$  OF NOMINAL  $\phi$  LOCATION IN A CIRCUMFERENTIAL DIRECTION. HOLE CIRCLE MUST BE CONCENTRIC WITH  $\frac{5.140}{5.130}$  (REF) DIA WITHIN  $.010$  MAX. TOTAL INDICATOR READING.

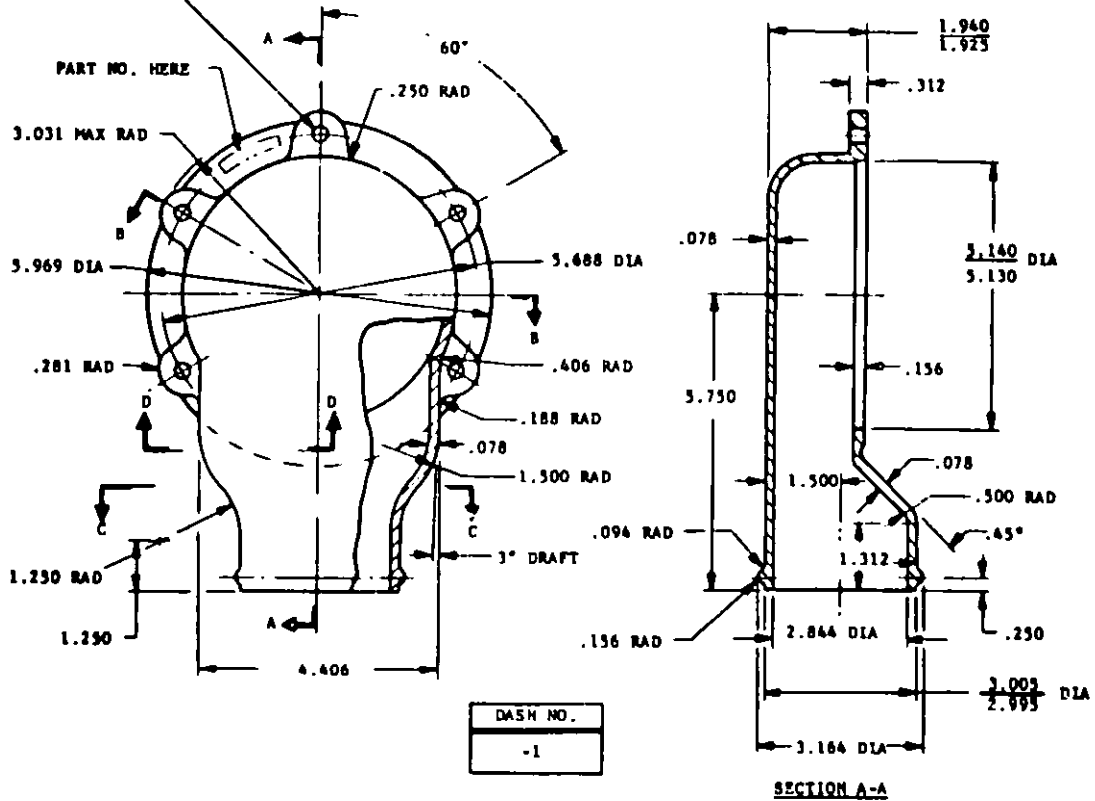

SECTION B-B

SECTION C-C

SECTION D-D

MATERIAL: ALUMINUM, DIE CAST, SPECIFICATION QQ-A-591, ALLOY NO. 3A0.

FINISH: ANODIZE, SPECIFICATION MIL-A-8625.

WEIGHT: .750 POUND.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS  $\pm .010$ , ANGLE  $\pm 1/2^\circ$ 

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) ENTIRE STANDARD REVISED AND REDRAWN

P.A. NAVY - AS Other Case	TITLE ADAPTER, GENERATOR TO AIR DUCT, RADIAL, 1 INCH	MILITARY STANDARD
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	MS25160 (AS)
SHEET	OF	1

DD FORM 672-1 (Limited circulation)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 6071

This military standard is approved by MILSTD and SYSTEMS COMMITTEE. It is the property of the Navy and should be used by all other military activities and agencies in conformity with applicable instructions.

APPROVED 28 SEPT 55 REVISED (A) 18 Dec 72