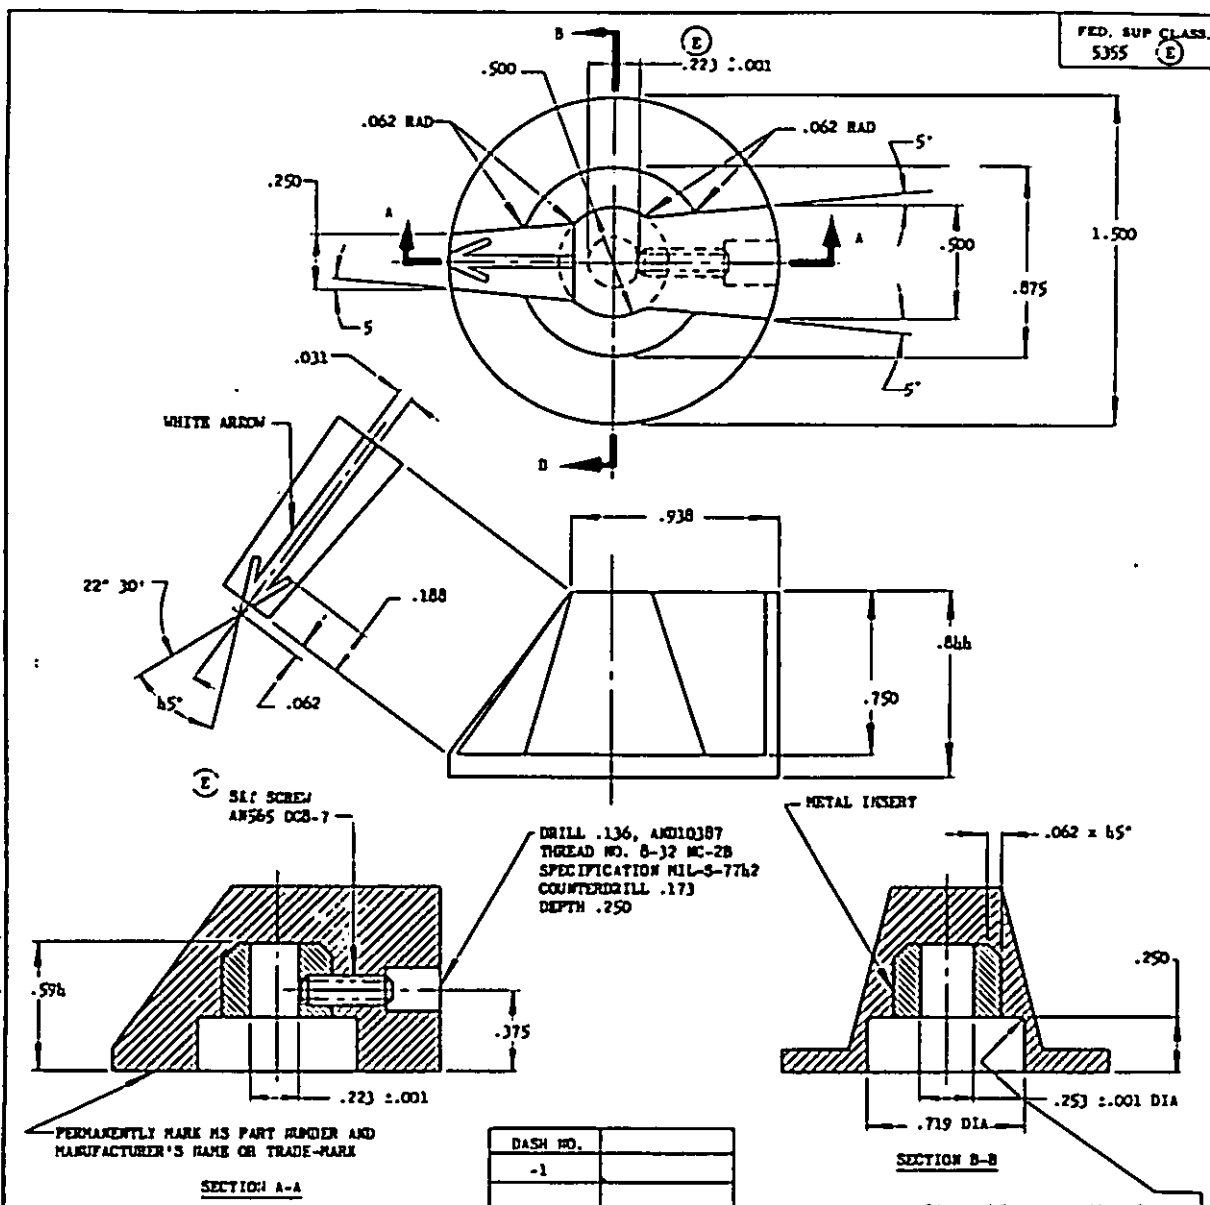


FED. SUP CLASS.  
5355 (E)**(B) MATERIAL:** TRANSPARENT PLASTIC.

INSERT, BRASS QC-8-611, COMP B, 1/2 HARD SETSCREW, CRES, MIL-S-7720, COMP 303S OR 303L2.

**(E) FINISH:** THE ENTIRE OUTER SURFACE OF KNOB, EXCEPT FOR THE WHITE ARROW, SHALL BE COATED WITH A GRAY MAT MATERIAL HAVING A DARK GULL GRAY COLOR CONFORMING TO COLOR NUMBER 36231 IN ACCORDANCE WITH FED STANDARD No. 595.

INSERT, CORE, SETSCREW, PASSIVATE.

CONTRAST OF THE WHITE ARROW AND GRAY COATING SHALL BE NOT LESS THAN 2.5 WHEN DETERMINED AS SPECIFIED IN SPECIFICATION MIL-P-7788.

BREAK ALL SHARP EDGES AND CORNERS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016, ANGLES ±2° 0'.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. NAVY - WP

Other Cost

NAVY - WC  
USAF - 11PROCUREMENT SPECIFICATION  
MIL-K-25069 (E)

TITLE

KNOB, POINTER, ILLUMINATED

SUPERSEDES:

MS 25166(ASG) (E)

MILITARY STANDARD

MS25166 (E)

SHEET 1 OF 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Solicitation for all new engineering and design applications and for replacements shall be made from this document.

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 6 Jul 55 REVISED 10 Oct 55 22 Jan 57 26 May 58 10 Sep 58 26 Nov 64