

INCH-POUND


MS25236G
 3 May 2004
 SUPERSEDING
 MS25236F
 12 January 1967

DETAIL SPECIFICATION SHEET
 LAMPS, INCANDESCENT T-1- 1/4,
 KNURLED SCREW BASE

Inactive for new design after 30 November 1998

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and MIL-DTL-6363.

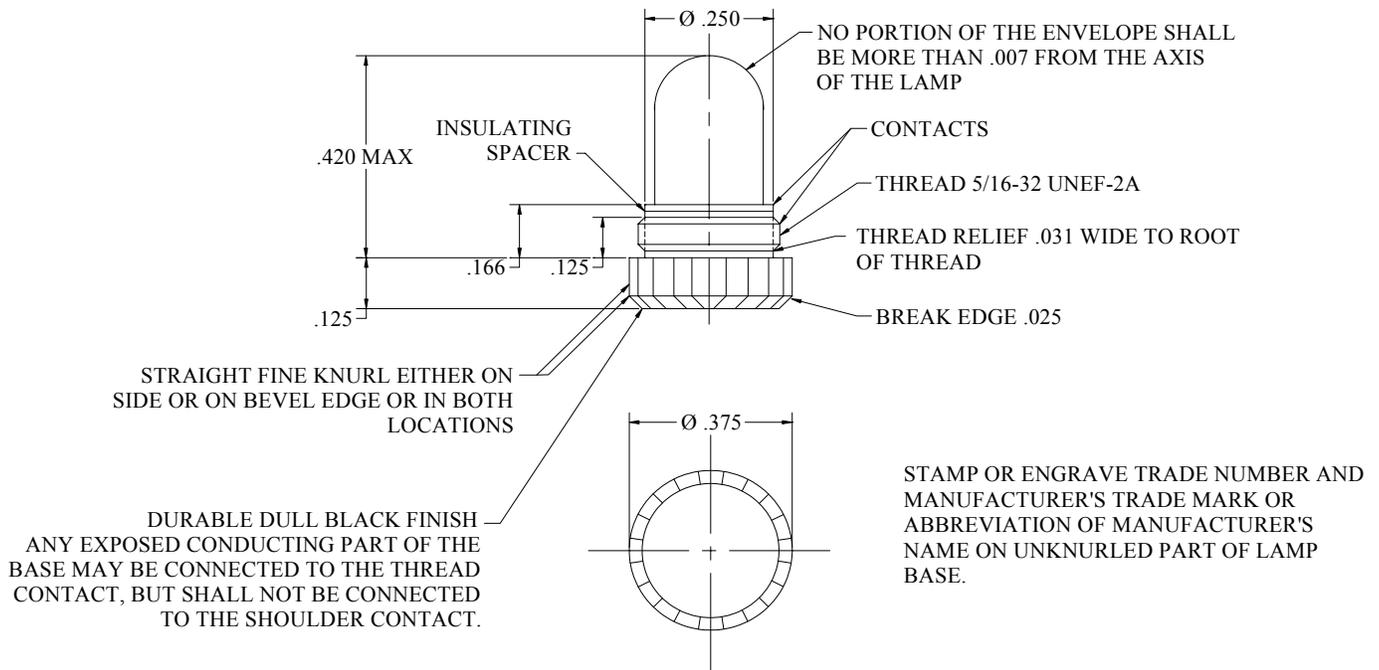

AMSC N/A

FSC 6240

MS25236G

DASH NO.	FORMER DASH NO.	RATED OPERATING POTENTIALS, VOLTS	DESIGN CURRENT AMPERES	COLOR OF ENVELOPE	SPHERICAL CANDLE POWER	AVERAGE LIFE HOURS
323	--	3	.19	CLEAR	.25 ±25%	350
323R	R323	3	.19	RED	.04 ±25%	350
8623	623	28	.04	CLEAR	.25 ±25%	1000
8623R	R623	28	.04	RED	.04 ±25%	1000
8639	639	6	.22	CLEAR	.25 ±25%	500
8639R	R639	6	.22	RED	.04 ± 25%	500

NOTES:

1. THREADS SHALL BE IN ACCORDANCE WITH FEDERAL HANDBOOK H-28.
2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015.
3. LIGHT EMITTED BY RED LAMPS SHALL CONFORM TO SAE-AS25050 FOR INSTRUMENT PANEL AND LIGHTING RED.
4. CHANGES FROM PREVIOUS ISSUE. MAGINAL NOTATIONS ARE NOT USED IN THIS REVISION TO IDENTIFY CHANGES WITH RESPECT TO THE PREVIOUS ISSUE DUE TO THE EXTENT OF THE CHANGES.

Custodians:
 Army – CR4
 Navy – AS
 Air Force – 99

Preparing Activity:
 DLA - IS

(Project 6240 – 1451)

Review Activity:
 Army – AR
 Air Force – 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.