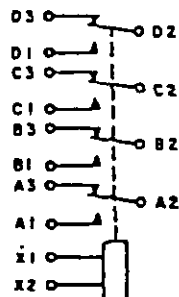
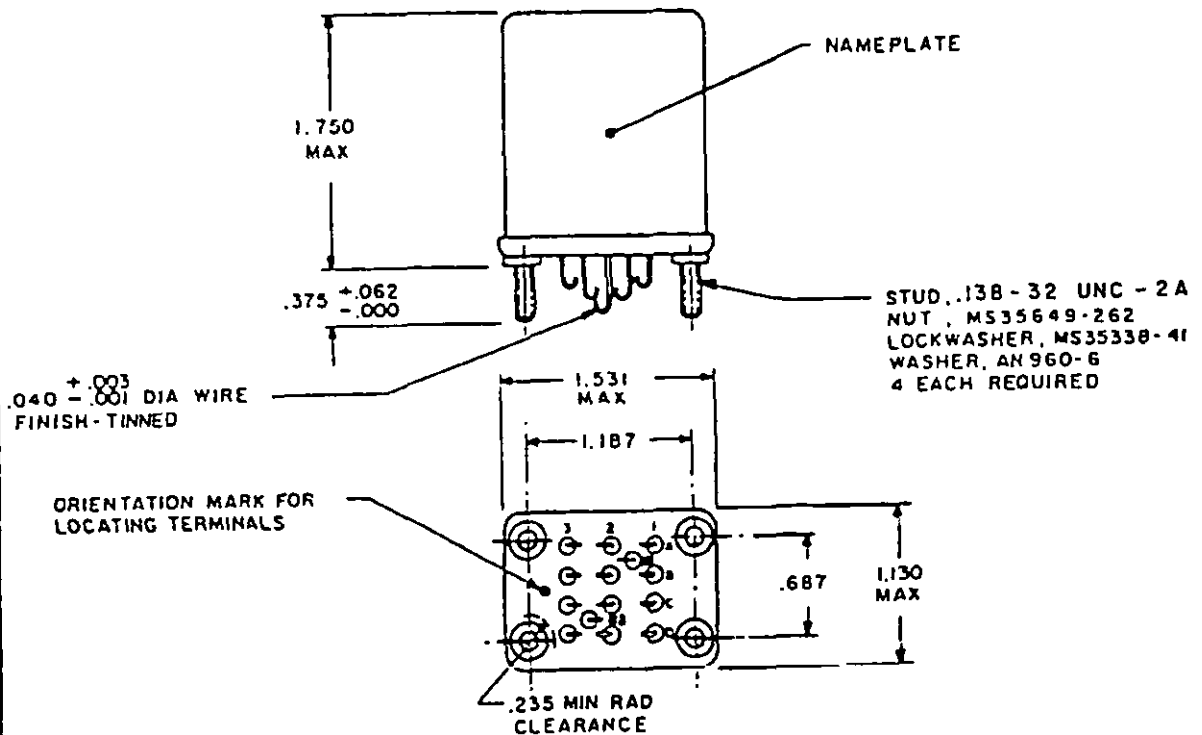
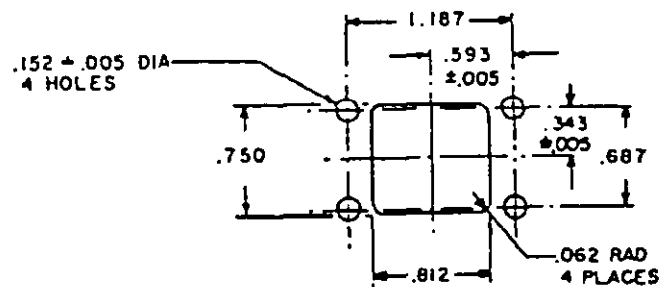


FED. SUP CLASS
5945User activities: Army -
Navy -
Air Force -Review activities: Army -
Navy - EC
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

CIRCUIT DIAGRAM
(SEE NOTE 5)

MOUNTING HOLE LAYOUT

(G) ENTIRE STANDARD REVISED

P.A. USAF - 85 Other Cust Navy - A5	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES, 4 PDT, TYPE 1, SOLDER HOOK, HERMETICALLY SEALED	MILITARY STANDARD MS25267
Procurement Specification MIL-R-6106	SUPERSEDES:	PAGE 1 OF 5	

DD FORM 1 MAY 73 672
AMSC N/A

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

5945-0745-04

APPROVED 17 March 1958 REVISED (G) 6 JUNE 67

FED. SUP CLASS
5945User activities: Army -
Navy -
Air Force -Review activities: Army - EC
Navy - EC
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Inches	mm	Inches	mm
.001	0.03	.375	9.53
.003	0.08	.593	15.06
.005	0.13	.687	17.45
.040	1.02	.750	19.05
.062	1.57	.812	20.62
.138	3.51	1.130	28.70
.152	3.86	1.187	30.15
.235	5.97	1.531	38.89
.343	8.71	1.750	44.45

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.010 (0.25 mm).
4. Terminal numbers need not appear on relay headers provided there is affixed to the relay a suitable legible circuit diagram that permanently and positively identifies each terminal location specified herein.
5. The use of diodes on ac relays is optional. Actual application must be shown on label.
6. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
7. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

TABLE I. Dash numbers and characteristics.

Dash number	Type	Coil	Terminal type	Mounting	Max weight in pounds
MS25267-					
D1	I	dc	Solder hook	Stud	.32
A1	I	ac	Solder hook	Stud	.32

P.A. USAF - 85 Other Cust Navy - AS	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES, 4 PDT, TYPE I, SOLDER HOOK, HERMETICALLY SEALED	MILITARY STANDARD
			MS 25267
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 2 OF 5

DD FORM 672
1 MAY 73

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 17 March 1958
REVISED (G) ENTIRE STANDARD REVISED.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

TABLE II. Operating characteristics.

MS part no.	Coil data										Time (milli seconds max)					
	Coil	Nominal	Max			Max pick-up voltage	Drop-out voltage $\frac{3}{\bar{}}$	Hold voltage $\frac{3}{\bar{}}$	Operate $\frac{4}{\bar{}}$	Release $\frac{5}{\bar{}}$	Contact bounce					
			Volts $\frac{1}{\bar{}}$	FREQ. Hz	Res Ω						Amperes	Normal $\frac{3}{\bar{}}$	High temp test	Cont current test	Main	Aux
MS25267 - 01	X1, X2	28	dc	248	29	0.15	18	19.8	22.5	1.5	7.0	20	20	2	2	
A1	X1, X2	115	400 $\frac{2}{\bar{}}$	N/A	122	0.05	90	95	103	5.0	30	25	50	2	2	

CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay. MS25267-A1 may be used on 60 Hz if maximum ambient temperature is limited to 85°C, maximum current will be 0.044 ampere. Over the temperature range.

	With nominal coil voltage.	From nominal coil voltage.
1/		
2/		
3/		
4/		
5/		

FED. SUP CLASS
5945

P.A USAF - 85 Other Cust Navy - AS	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES, 4 PDT, TYPE I, SOLDER HOOK, HERMETICALLY SEALED	MILITARY STANDARD
			MS25267
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 3 OF 5

FED. SUP CLASS
5945

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles X 10 ³	28 V dc		115 V ac, 1 phase		115/200 V ac, 3 phase 1/				See appropriate notes
		Main	Aux	Main	Aux	Main	Aux	Main	Aux	
		NO	NC	NO	NC	1400 Hz	1400 Hz	160 Hz	1400 Hz	
Resistive	100	5	5	5	4					
Inductive	100									
Inductive	20	3	3	3	2					
Motor	100	1.5	11.5	1.5	1					
Lamp	100	10.8	10.8	0.8	0.6					
Transfer load										2/
Mechanical life reduced current	400	1.25	11.25	1.25	1					
Interad current		Applicable per specification								

1/ Absence of value indicates relay is not rated for 3-phase applications.

(See MS27218 for polyphase applications).

2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

APPROVED 17 March 1958 REVISED (G) ENTIRE STANDARD REVISED.

P.A. USAF - 85

Other Cust

Navy - AS

International
Interchange

TITLE

RELAYS, ELECTROMAGNETIC, 5 AMPERES,
4 PDT, TYPE 1, SOLDER HOOK,
HERMETICALLY SEALED

MILITARY STANDARD

MS 25267

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 4 OF 5

DD FORM 672
1 MAY 73

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - EC
Navy -
Air Force - 11, 99
User activities: Army -
Navy -
Air Force -

FED. SUP CLASS
5945

Review activities: Army -
Navy - EC
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army -
Navy -
Air Force -

Environmental characteristics

Temperature range -70°C to +125°C
Max altitude rating 80,000 ft
Shock G-level 50 G
Duration 11 ms
Max duration contact opening 10 μs
Vibration - sinusoidal
G-level 10 G
Frequency range 5 - 1,500 Hz
Vibration - random
Applicable specification N/A
Power spectral density N/A
RMS G min N/A
Frequency range N/A
Curve N/A
High shock 15 G
Acceleration

Electrical characteristics

Insulation resistance, initial 100 megohms
After life or environmental tests 50 megohms
Dielectric strength (sea level)
Initial After life tests
Coil to case 1,000 V rms 1,000 V rms
Aux contacts
All other points 1,000 V rms 1,000 V rms
Dielectric strength (altitude)
Coil to case 80,000 ft
250 V rms
Aux contacts
All other points 250 V rms
Max contact drop initial 0.150 volt
After life test 0.175 volt
Overload current 20 amperes
Rupture current 25 amperes
Duty rating Continuous
RFI specification MIL-STD-461
(Applicable to coil circuits of ac operated relays)

P.A
USAF - 85
Other Cust
Navy - AS

International
Interest

TITLE

RELAYS, ELECTROMAGNETIC, 5 AMPERES,
4 PDT, TYPE I, SOLDER HOOK,
HERMETICALLY SEALED

MILITARY STANDARD

MS 25267

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 5 OF 5