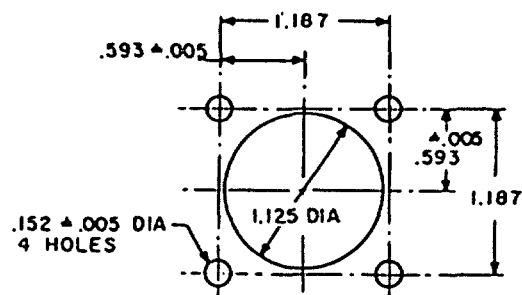
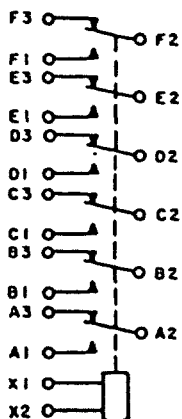


FED. SUP CLASS
5945INACTIVE FOR NEW DESIGN AFTER 5 JUN 87
NO SUPERSEDING STANDARDUser activities: Army -
Navy -
Air Force -Review activities: Army -
Navy - EC
Air Force -

11, 99

M22759/5, M22759/II OR
MIL-W-8777, 22 GA LEADWIRE
PRINTED AT 6 INCH INTERVALS
PER CIRCUIT DIAGRAM OR COLOR CODE
PER SPECSTUD, NO. 6-32 UNC-2A
NUT, MS35649-262
LOCKWASHER, MS35338-41
WASHER, AN960-6
4 EACH REQUIRED.235 MIN RAD
CLEARANCECIRCUIT
DI-A1
(NOTE 5)

MOUNTING HOLE LAYOUT

(H) ENTIRE STANDARD REVISED

APPROVED 17 March 1958 REVISED (H) 5 JUN 87

P.A USAF - 85 Other Cust Navy - AS	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES, 6 PDT, TYPE I, POTTED LEAD, HERMETICALLY SEALED	MILITARY STANDARD MS25270
Procurement Specification MIL-R-6106	SUPERSEDES:	PAGE 1 OF 5	

DD FORM 1 MAY 73 672
AMSC N/A

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

5945-0745-06

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED. SUP CLASS
5945User activities:
Army -
Navy -
Air Force -

Inches	mm
.005	0.13
.062	1.57
.125	3.18
.152	3.86
.235	5.97
.375	9.53
.593	15.06
.025	15.88
1.100	27.94
1.187	30.15
1.531	38.89
2.187	55.55
24.00	609.60

Review activities:
Army - EC
Navy -
Air Force - 11, 99

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are $\pm .010$ (0.25 mm).
4. Terminal numbers need not appear on relay header provided there is affixed to the relay a suitable legible circuit diagram that permanently and positively identifies each terminal location specified hereon.
5. The use of diodes on ac relays is optional. Actual application must be shown on label.
6. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
7. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

TABLE I. Dash numbers and characteristics.

Dash number	Type	Coil	Terminal type	Mounting	Max weight in pounds
MS25270-					
D1	I	dc	Lead	Stud	.67
A1	I	ac	Lead	Stud	.67

P.A USAF - 85	International interest	TITLE RELAYS, ELECTROMAGNETIC, 5 AMPERES, 6 PDT, TYPE I, POTTED LEAD, HERMETICALLY SEALED	MILITARY STANDARD
Other Cust Navy - AS			MS25270
Procurement Specification MIL-R-6106	SUPERSEDES:		PAGE 2 OF 5

APPROVED 17 March 1958 REVISED (H) ENTIRE STANDARD REVISED.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - EC
Navy - EC
Air Force - 11, 99

User activities: Army -
Navy -
Air Force -

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles X 10 ³	28 V dc		115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate notes		
		Main		Aux		Main		Aux		Main			Aux	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz		400 Hz	60 Hz
Resistive	100	5	5			5	4							
Inductive	100													
Inductive	20	3	3			3	2							
Motor	100	1.5	1.5			1.5	1							
Lamp	100	0.8	0.8			0.8	0.6							
Transfer load														2/
Mechanical life reduced current	400	1.25	1.25			1.25	1							
Intmd current		Applicable per specification												

1/ Absence of value indicates relay is not rated for 3-phase applications.

2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

FED. SUP CLASS
5945

P.A.
USAF - 85
Other Cust
Navy - AS

International
interest

TITLE

RELAYS, ELECTROMAGNETIC, 5 AMPERES,
6 PDT, TYPE I, POTTED LEAD,
HERMETICALLY SEALED

MILITARY STANDARD

MS25270

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 4 OF 5

APPROVED 17 March 1958 REVISED (H) ENTIRE STANDARD REVISED

DD FORM 672

1 MAY 73

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

User activities: Army -
Navy -
Air Force -

Review activities: Army -
Navy -
Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

EC 11, 99

FED. SUP CLASS
5945

Environmental characteristics

Temperature range -70°C to +125°C
Max altitude rating 80,000 ft
Shock G-level 25 G
Duration 11 ms
Max duration contact opening 10 μs
Vibration - sinusoidal 10 G
G-level 10 G
Frequency range 5 - 1,500 Hz
Vibration - random N/A
Applicable specification N/A
Power spectral density N/A
RMS G min N/A
Frequency range N/A
Curve N/A
High shock 15 G
Acceleration

Electrical characteristics

Insulation resistance, initial 100 megohms
After life or environmental tests 50 megohms
Dielectric strength (sea level)
Initial 1,050 V rms
After life tests 1,000 V rms
Coil to case
Aux contacts
All other points 1,050 V rms
1,000 V rms
Dielectric strength (altitude)
80,000 ft
1,000 V rms
Coil to case
Aux contacts
All other points 1,000 V rms
Max contact drop initial 0.150 volt
After life test 0.175 volt
Overload current 20 amperes
Rupture current 25 amperes
Duty rating Continuous
RFI specification MIL-STD-461
(Applicable to coil circuits of ac operated relays)

Quality conformance inspection

Performance of groups B and C tests are not applicable.

P.A.

USAF - 85

Other Cust

Navy - AS

International
Interest

TITLE

RELAYS, ELECTROMAGNETIC, 5 AMPERES,
6 PDT, TYPE I, POTTED LEAD,
HERMETICALLY SEALED

MILITARY STANDARD

MS25270

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 5 OF 5

DD FORM 672
1 MAY 73

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 17 March 1958 REVISED H ENTIRE STANDARD REVISED