


FED. SUP CLASS
5945User activities: Army -
Navy -
Air Force -Review activities: Army - EC
Navy -
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

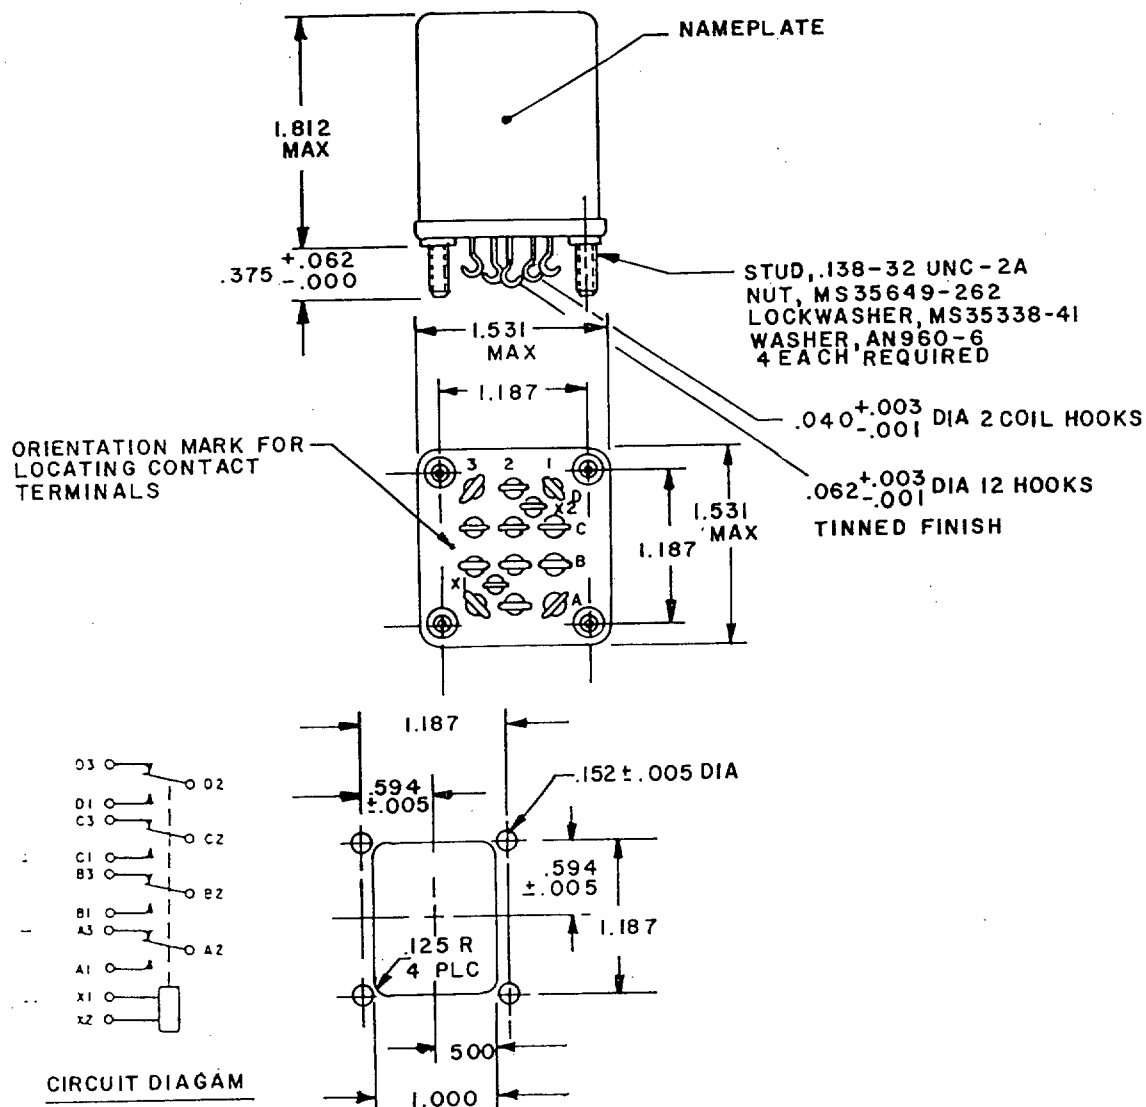

(G) ENTIRE STANDARD REVISED

P.A USAF - 85 Other Cust Navy - AS	International interest	TITLE RELAYS, ELECTROMAGNETIC, 10 AMPERES, 4 PDT, TYPE I, SOLDER HOOK HERMETICALLY SEALED	MILITARY STANDARD
			MS25271
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 1 OF 5

DD FORM 672
1 MAY 73
AMSC N/A

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

5945-0745-07

APPROVED 17 March 1958 REVISED (G) 5 JUN 87

FED. SUP CLASS

Inches	mm	Inches	mm
.001	0.03	.152	3.86
.003	0.08	.375	9.53
.005	0.13	.500	12.70
.010	0.25	.594	15.09
.040	1.02	1.000	25.40
.062	1.57	1.187	30.15
.125	3.18	1.531	38.89
.138	3.51	1.812	46.02

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.010 (0.25 mm).
4. Terminal numbers need not appear on relay headers provided there is affixed to the relay a suitable legible circuit diagram that permanently and positively identifies each terminal location specified herein.
5. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

TABLE I. Dash numbers and characteristics.

Dash number	Type	Coil	Terminal type	Mounting	Max weight in pounds
MS25271-					
D1	I	dc	Solder hook	Stud	.45
A1	I	ac	Solder hook	Stud	.45

P.A. USAF - 85 Other Cust Navy - AS	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 10 AMPERES, 4 PDT, TYPE I, SOLDER HOOK, HERMETICALLY SEALED	MILITARY STANDARD
Procurement Specification MIL-R-6106		SUPERSEDES:	MS 25271
			PAGE 2 OF 5

DD FORM 672 1 MAY 73 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - Navy - EC Air Force - 11, 99

User activities: Army - Navy - Air Force -

APPROVED 17 March 1958 REVISED (G) ENTIRE STANDARD REVISED.

User activities: Army -
Navy -
Air Force -

Review activities: Army - EC
Navy -
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED. SUP CLASS
5945

TABLE II. Operating characteristics.

MS part no.	Coil data										Time (milliseconds max)				
	Coil	Nominal		Max		Max pick-up voltage			Drop-out voltage 2/ voltage	Hold voltage 2/ voltage	Operate 3/ voltage	Release 4/ voltage	Contact bounce		
		Volts 1/ Hz	Freq. Hz	Res Ω	Volts	Amperes	Normal 2/ voltage	High temp test					Cont current test	Main	Aux
MS25271-	X1, X2	28	dc	100	29	0.350	18	19.5	22.5	1.5	7.0	20	2	2	
A1	X1, X2	115	400 5/	N/A	122	0.07 J	90	95	103	5.0	30	25	2	2	

1/ CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.

2/ Over the temperature range.

3/ With nominal coil voltage.

4/ From nominal coil voltage.

5/ MS25271-A1 may be used on 60 Hz if maximum ambient temperature is +85°C (coil current shall be 0.077 ampere maximum).

P.A
USAF - 85
Other Cust
Navy - AS

International interest

TITLE

RELAYS, ELECTROMAGNETIC, 10 AMPERES, 4 PDT, TYPE I, SOLDER HOOK, HERMETICALLY SEALED

MILITARY STANDARD

MS25271

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 3 OF 5

DD FORM 672
1 MAY 73

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 17 March 1958 REVISED (G) ENTIRE STANDARD REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities:

Army -
Navy - EC
Air Force - 11, 99

User activities:

Army -
Navy -
Air Force -

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles X 10 ³	28 V dc		115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate notes
		Main	Aux	Main	Aux	Aux	Main	Aux	Aux			
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	10	10	10	6			10	6			
Inductive	100											
Inductive	20	6	6	6	4			6	4			
Motor	100	4	4	4	3			4	3			
Lamp	100	2	2	2	1.5			2	1.5			
Transfer load												2/
Mechanical life reduced current	400	2.5	2.5	2.5	2			2.5	2			
Intnd current		Applicable per specification										

1/ Absence of value indicates relay is not rated for 3-phase applications.
2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

FED. SUP CLASS
5945

P.A
USAF - 85
Other Cust
Navy - AS

International interest

TITLE

RELAYS, ELECTROMAGNETIC, 10 AMPERES, 4 PDT, TYPE I, SOLDER HOOK HERMETICALLY SEALED.

MILITARY STANDARD

MS25271

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 4 OF 5

APPROVED

17 March 1958

REVISED (6)

ENTIRE STANDARD REVISED

FED. SUP CLASS
5945

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - Navy - EC Air Force - 11, 99

User activities: Army - Navy - Air Force -

Environmental characteristics

Temperature range -70°C to +125°C
 Max altitude rating 80,000 ft
 Shock G-level 50 G
 Duration 11 ms
 Max duration contact opening 10 μs
 Vibration - sinusoidal 10 G
 G-level 10 G
 Frequency range 5 - 1,500 Hz
 Vibration - random
 Applicable specification N/A
 Power spectral density N/A
 RMS G min N/A
 Frequency range N/A
 Curve N/A
 High shock N/A
 Acceleration 15 G

Electrical characteristics

Insulation resistance, initial 100 megohms
 After life or environmental tests 50 megohms
 Dielectric strength (sea level)
 Coil to case Initial After life tests
 1,000 V rms 1,000 V rms
 Aux contacts
 All other points 1,500 V rms 1,125 V rms
 Dielectric strength (altitude)
 Coil to case 80,000 ft
 250 V rms
 Aux contacts
 All other points 350 V rms
 Max contact drop initial 0.150 volt
 After life test 0.175 volt
 Overload current 20 amperes
 Rupture current 25 amperes
 Duty rating Continuous
 RFI specification MIL-STD-461
 (Applicable to coil circuits of ac operated relays)

P.A USAF - 85

Other Cust
Navy - ASInternational
interest

TITLE

RELAYS, ELECTROMAGNETIC, 10 AMPERES,
 4 PDT, TYPE I, SOLDER HOOK
 HERMETICALLY SEALED.

MILITARY STANDARD

MS25271

Procurement Specification
 MIL-R-6106 =

SUPERSEDES:

PAGE 5 OF 5