

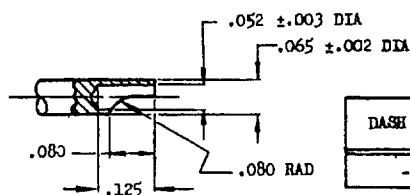
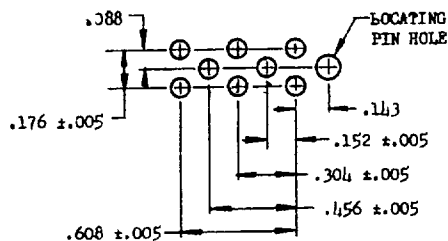
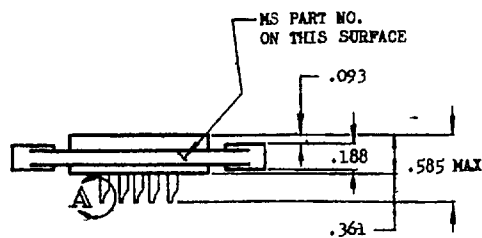


operation, the United States Government hereby incurs no responsibility nor any obligation whatsoever and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

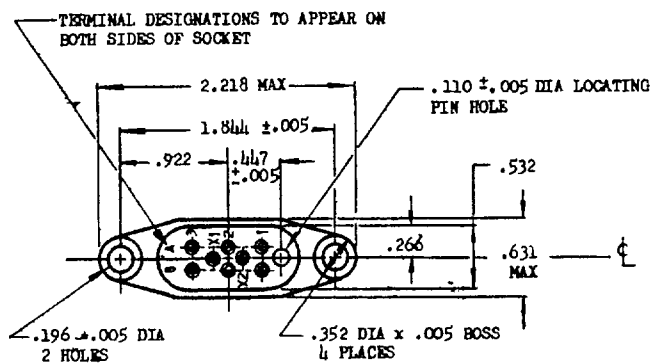


DASH NO.	WT LB MAX WITHOUT HARDWARE
-4	.030

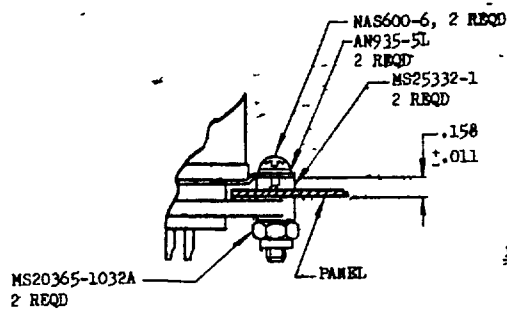


#### BOTTOM MOUNTED

USE WASHERS SUPPLIED WITH MS25332-1 TO ACCOMPLISH THE INDICATED SPACING



#### TOP MOUNTED

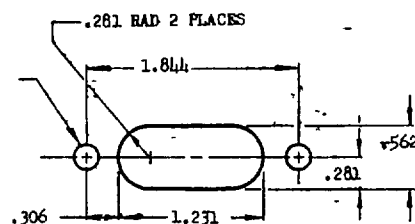

#### (A) INSERTION AND WITHDRAWAL FORCES MEASURED WITH:

.0390 ±.0001 DIA PIN  
-.0000

#### (B) VIBRATION, MIL-STD-202, METHOD 204, CONDITION B, WITH MS25321 INSERTED

#### (C) CONTACT TABS, PARA 3.8, MIL-S-12883

#### (D) AMBIENT TEMPERATURE RANGE

#### (E) PIN ENTRY

#### (F) DIELECTRIC, MIN, WITHOUT MATING RELAY ENGAGED SEA LEVEL ALTITUDE (80,000 FT)

#### (G) MATING RELAY

1 OZ MIN

10 G, 10 TO 1500 CPS

NOT APPLICABLE

-65°C TO +120°C

PARA. 3.3 1.2, MIL-C-5015

2500 VRMS

500 VRMS

MS25321

MATERIAL: BODY, MIL-M-19833, TYPE GD1-30F.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES, DECIMALS ±.010.

(B) ENTIRE STANDARD REVISED

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

P A Navy - Wep	TITLE	MILITARY STANDARD
Other Cust USAF -SGEE	SOCKET - RELAY, ELECTRICAL, 8 CONTACTS, 5 AMPS	MS25322(ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 1

MTI-C-12883

Department of the USAF and is mandatory for use by all activity. All other military activities are required to employ this standard where suitable.

APPROVED 12 May 58 REVISED 1 Mar 63