

INCH-POUND

MS25327N
 27 November 2003
 SUPERSEDING
 MS25327M
 20 January 1989


DETAIL SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 10 AMPERES,
 4 PDT, TYPE I, SOCKET MOUNTED,
 HERMETICALLY SEALED


INACTIVE FOR NEW DESIGN AFTER 5 JUNE 1987. NO
 SUPERSEDING SPECIFICATION. FOR NEW DESIGN USE MIL-
 PRF-83536/15 OR MIL-PRF-83536/16 OR MIL-PRF-83536/17

This specification is approved for use by all Departments
 and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall
 consist of this specification and the latest issue of MIL-PRF-6106.

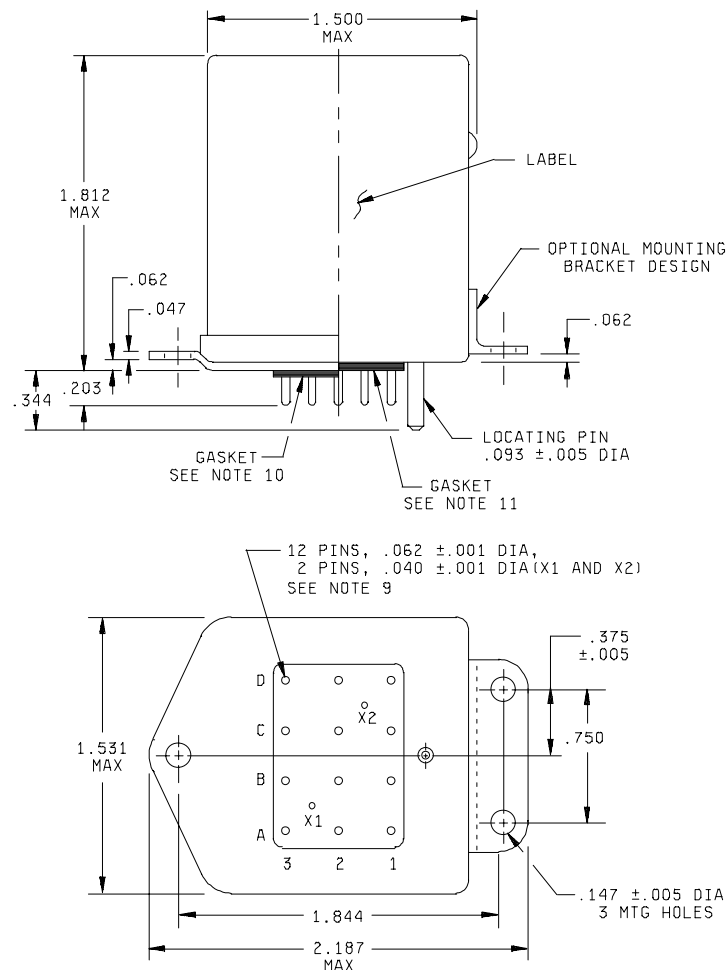FIGURE 1. Dimensions and configurations.

MS25327N

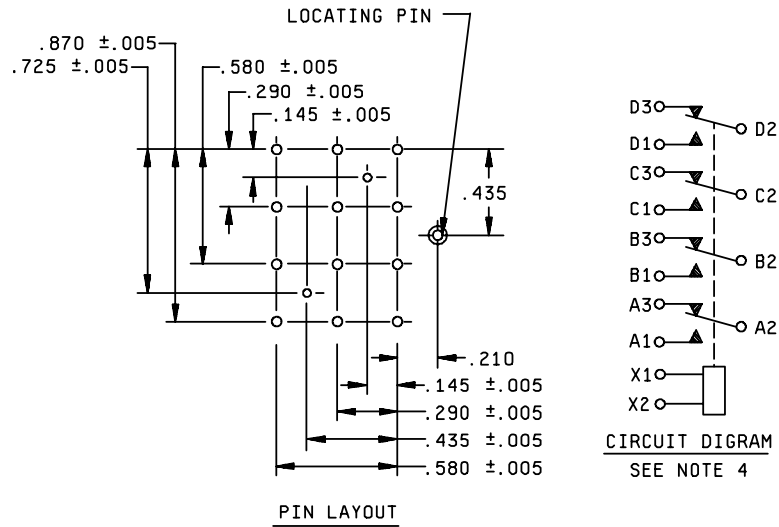

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is $\pm .010$ (0.25 mm).
4. The use of diodes on ac relays is optional. Actual application must be shown on label.
5. Pins to be perpendicular to header surface within one degree.
6. Terminal numbers need not appear on relay headers provided there is affixed positively identifies each terminal location specified herein.
7. In the event of conflict between the text of this standard and the references cited herein, the text of this specification shall take precedence.
8. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation forms a part of this standard to the extent specified herein.
9. Socket pin terminals shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold-plated contacts. Terminals shall be gold plated. One system for gold plating that may be used is ASTM B488, type 3, class 1.25 with a nickel underplate of 50 to 150 microinches thick. The gold plating system shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity.

FIGURE 1. Dimensions and configurations - Continued.

MS25327N

10. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have shore hardness 20 ± 5 , thickness $.072 \pm .008$, recessed $.047 \pm .005$ in to bracket. Gasket material according to AMS 3332 has been considered acceptable.
11. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have shore hardness 20 ± 5 , thickness $.062 \pm .005$ flush with bracket. Gasket material according to AMS 3332 has been considered acceptable.

FIGURE 1. Dimensions and configurations - Continued.TABLE I. Dash numbers and characteristics.

Dash number MS25327-	Type	Coil	Terminal type	Max weight in pounds
D1	I	dc	Plug in	0.43
A1	I	ac	Plug in	0.45

TABLE II. Operating characteristics.

PIN MS 25327-	Coil data											Time - (milliseconds maximum)					
	Coil	Rated			Max		Max pick-up voltage			Hold voltage 2/	Drop out voltage 2/	Oper- ate 3/	Rel- ease 4/	Contact Bounce			
		Volts 1/	Freq Hz	Res Ω	Volts	Amp	Nor- mal 2/	High temp test	Cont current test					Main		Aux	
														NO	NC	NO	NC
D1	X1,X2	28	dc	N/A	29	0.350	18	19.5	22.5	7.0	1.5	20	20	2	2	---	---
A1	X1,X2	115	400 5/	N/A	122	0.073	90	95	103	30	5.0	25	50	2	2	---	---

1/ CAUTION: Use of any coil voltage less than rated coil voltage will compromise the operation of the relay.

2/ Over the temperature range.

3/ With rated coil voltage.

4/ From rated coil voltage.

5/ MS25272-A1 may be used on 60 Hz if maximum ambient temperature is limited to 85°C (maximum coil current shall be 0.077 ampere).

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operat ing cycles x 10 ³	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appro priate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	10	10			10	6			10	6			
Inductive	100													
Inductive	20	6	6			6	4			6	4			
Motor	100	4	4			4	3			4	3			
Lamp	100	2	2			2	1.5			2	1.5			
Transfer load														2/
Mechanical life reduced current	400	2.5	2.5			2.5	2			2.5	2			
Mixed loads		Applicable per specification												

1/ Absence of value indicates relay is not rated for 3-phase application.

2/ Transfer load indicates relay is suitable for transfer between unsynchronized ac power supplies at rating indicated.

MS25327N

Environmental characteristics.

Temperature range	-70°C to +125°C
Max altitude rating	80,000 ft
Shock G-level	50 G
Duration	11 ms
Max duration contact opening	10 µs
Vibration - sinusoidal	
G-level	10 G
Frequency range	5 - 1,500 Hz
Vibration - random	
Applicable specification	N/A
Power spectral density	N/A
RMS G min	N/A
Frequency range	N/A
Curve	N/A
High shock	N/A
Acceleration	15 g's

Electrical characteristics.

Insulation resistance, initial	100 megohms.
After life or environmental tests	50 megohms.

Dielectric strength (sea level).

	<u>Initial</u>	<u>After life tests</u>
Coil to case	1,000 V rms	1,000 V rms
Aux contacts	N/A	N/A
All other points	1,500 V rms	1,125 V rms

Dielectric strength (altitude):	<u>80,000 ft</u>
Coil to case	500 V rms
Aux contacts	500 V rms
All other points	500 V rms

Max contact drop initial: 0.150 volt.

After life test: 0.175 volt.

Overload current (NO): 40 amperes dc,
60 amperes ac

Rupture current 50 amperes dc,
80 amperes ac

Duty rating: Continuous.

RFI specification: MIL-STD-461.
(Applicable to coil circuits of ac operated relays).

Conformance inspection.

Group A acceptance reports shall be submitted to the preparing activity on a yearly basis in order to retain qualification for this military specification sheet.

Performance of groups B and C inspections are not applicable.

MS25327N

Qualification by similarity: See MIL-PRF-6106.

NOTES

Referenced documents. In addition to MIL-PRF-6106, this specification sheet references the following documents. (Government documents are available on line at <http://assist.daps.dla.mil/quicksearch> or www.dodssp.daps.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094). Society of Automotive Engineers documents are available from the Society of Automotive Engineers 400 Commonwealth Drive Warrendale, Pennsylvania, United States, 15096-0001. <http://www.sae.org>

SPECIFICATIONS

Department of Defense

MS25272 - Relays, Electromagnetic, 10 Amperes, 4 PDT, Type I, Potted Lead, Hermetically Sealed

STANDARDS

Department of Defense

MIL-STD-461 - Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment

Society of Automotive Engineers (SAE)

SAE-AMS3332 - Silicone Rubber Extreme Low-Temperature Resistant, 15-30

Custodians:

NAVY - AS

Air Force - 11

DLA - CC

Preparing activity:

DLA - CC

(Project 5945-1221-09)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at www.dodssp.daps.mil.