


NOTES.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded as an endorsement, approval, or recommendation of the quality or value thereof, or as carrying any right or permission to manufacture, use, or reproduce therefrom.

NO. 10-32 NF-2A

NO. 4-40 NC-2B

.406 TO .500 MIN FULL THREAD

.375 MIN FULL THREAD

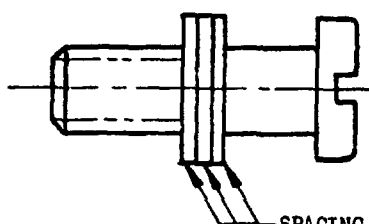

-SPACING WASHERS SAME AS AN960-C10L
EXCEPT THICKNESS TO BE .032 ±.002

DASH NO.

-1

MATERIAL. STUD; CORROSION RESISTANT STEEL, QQ-S-763, TYPE FM OR G FOR COLD UPSETTING PROCESS.

FINISH: PASSIVATE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $\pm .010$.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - Wep	TITLE	MILITARY STANDARD
Other Cust USAF - DAY	SCREW AND WASHER ASSEMBLY; RELAY SOCKET MOUNTING	MS25332(ASG)
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 1

APPROVED	1 Nov 60	REVISED
----------	----------	---------