


**NOTES.**—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded as constituting an acknowledgment by the holder, or any other person or corporation, of conveying any rights or permission to manufacture, use, or patented invention that may in any way be related thereto.

Technical drawing of a mechanical assembly showing a cross-section of a bracket with a threaded hole. The drawing includes dimensions: .190 MAX for the total height, .672 for the distance from the centerline to the top edge, .036 for the top flange thickness, .062  $\pm$ .005 for the hole diameter, .046 for the hole depth, and .312 for the total height of the bracket. The hole is labeled with thread specifications: NO. 10-32 NF-2A and NO. 4-40 NC-2B. The hole diameter is also specified as .406 TO .500 MIN FULL THREAD and .375 MIN FULL THREAD.

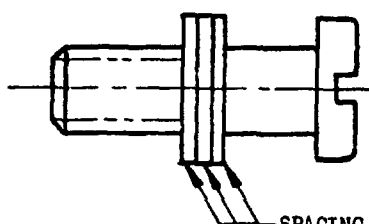

-SPACING WASHERS SAME AS AN960-C10L  
EXCEPT THICKNESS TO BE .032 ±.002

DASH NO.

-1

MATERIAL. STUD; CORROSION RESISTANT STEEL, QQ-S-763, TYPE FM OR G FOR COLD UPSETTING PROCESS.

FINISH: PASSIVATE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS  $\pm .010$ .

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - Wep	TITLE	MILITARY STANDARD
Other Cust USAF - DAY	SCREW AND WASHER ASSEMBLY; RELAY SOCKET MOUNTING	MS25332(ASG)
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 1

APPROVED	1 Nov 60	REVISED
----------	----------	---------